


# WHI4 | 单支点 SINGLE-BEARING

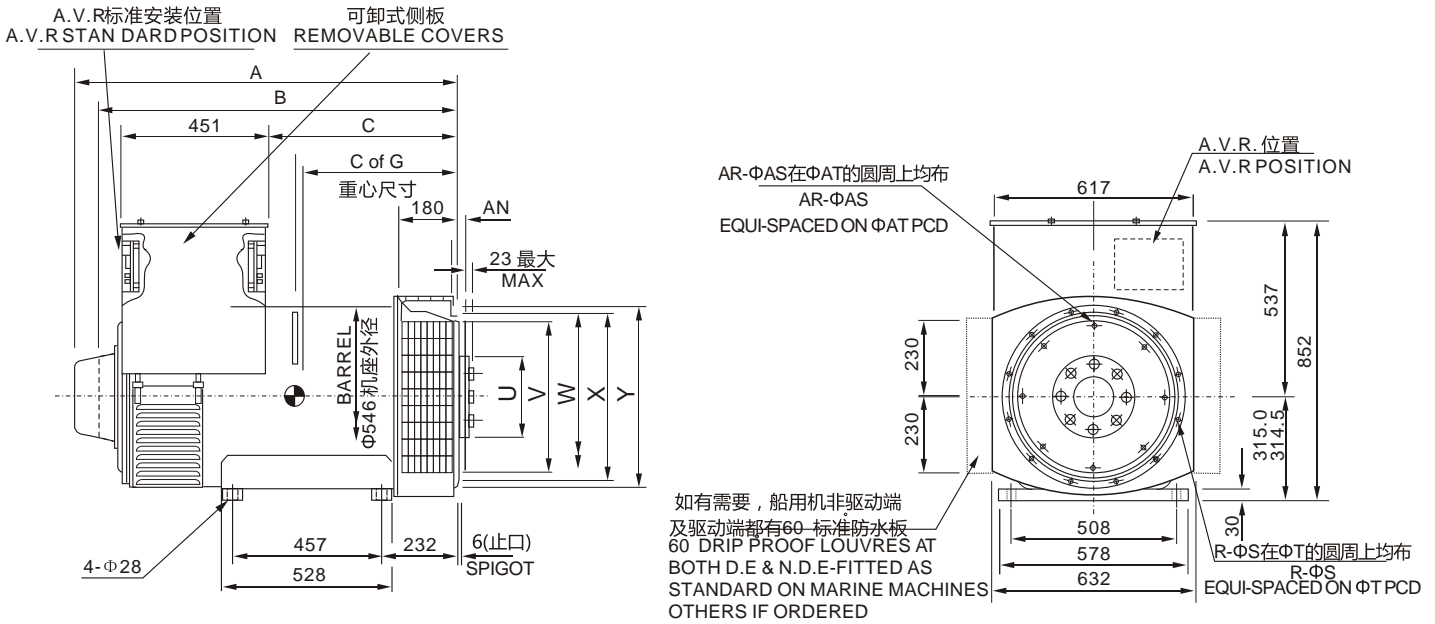

尺寸 DIMENSION			
型号TYPE	A	B	CG
WHI4C1	1051	534	463
WHI4D1	1051	534	463
WHI4E1	1191	674	483
WHI4FS1	1191	674	530
WHI4F1	1191	674	530

盘片式联轴器 COUPLING DISC						
S.A.E.No.	AB	AR	AS	AT	U	Y
11.5	39.68	8	10.3	333.4	250	352.3
14	25.40	8	13.5	438.1	250	466.6
8	15.8	6	16.7	543.0	250	571.1

法兰式过渡接套 ADAPTOR						
S.A.E.No.	BR	BS	BT	W	X	Y
0	12	14	679.5	626	647.6	711
1/2	12	14	619.1	569	584.1	680
1	12	12.7	530.2	496	511.1	617
2	12	11	466.7	432	447.6	617
3	12	11	428.6	394	409.5	617

运输数据 TRANSPORTATION DATA			
型号TYPE	净重N.W(kg)	毛重G.W(kg)	包装箱尺寸PACKAGE SIZE(cm)
WHI4C1	820	880	151×79×107
WHI4D1	880	950	151×79×107
WHI4E1	1010	1065	151×79×107
WHI4FS1	1085	1145	151×79×107
WHI4F1	1125	1185	151×79×107

# WHI4

## Alternator 无刷交流同步发电机 BRUSHLESS SYNCHRONOUS AC




WHI 4 三相陆用发电机功率  
WHI 4 3-PHASE INDUSTRY ALTERNATORS POWER

		50Hz(1500转/分) 50Hz(1500RPM)			60Hz(1800转/分) 60Hz(1800RPM)		
电 压 (V) VOLTAGE		H级温升(125°C) CLASS H TEMPERATURE-RISE(125°C)			H级温升(125°C) CLASS H TEMPERATURE-RISE(125°C)		
星形串联 STAR-SERIES		380	400	415	416	440	480
星形并联 STAR-PARALLEL		190	200	208	220	230	230
三角形串联 Δ-SERIES		220	230	240	254	266	266
WHI 4 C	额定容量 RATED CAPACITY	250	250	250	294	300	300
	额定功率 RATED POWER	200	200	200	235	240	240
	效 率 EFFICIENCY	92.5	92.4	92.7	92.4	92.6	92.6
WHI 4 D	额定容量 RATED CAPACITY	294	294	294	350	356	362
	额定功率 RATED POWER	235	235	235	280	280	290
	效 率 EFFICIENCY	92.3	92.7	93	92.6	92.7	92.8
WHI 4 E	额定容量 RATED CAPACITY	312.5	312.5	312.5	375	394	400
	额定功率 RATED POWER	250	250	250	300	315	325
	效 率 EFFICIENCY	93.2	93.5	93.6	93.3	93.5	93.7
WHI 4 FS	额定容量 RATED CAPACITY	344	344	344	415	425	440
	额定功率 RATED POWER	275	275	275	332	340	352
	效 率 EFFICIENCY	93.1	93.3	93.5	93.2	93.5	93.5
WHI 4 F	额定容量 RATED CAPACITY	375	375	375	450	450	450
	额定功率 RATED POWER	300	300	300	360	360	360
	效 率 EFFICIENCY	93.0	93.2	93.3	93.0	93.3	93.4

注：• 所有发电机额定功率基于环境温度40°C海拔1000m以内。 • 可以从单个绕组获得宽范围的电压，也可通过12个出线端重组获得。  
• 其他电压范围的发电机要根据用户需要制造。

Note : • The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level  
• Extended range voltage can be got from single windings or from 12-leads adjusted • Other special voltage range can be met by FIRSTALL company

# WHI4 | 单支点 SINGLE-BEARING

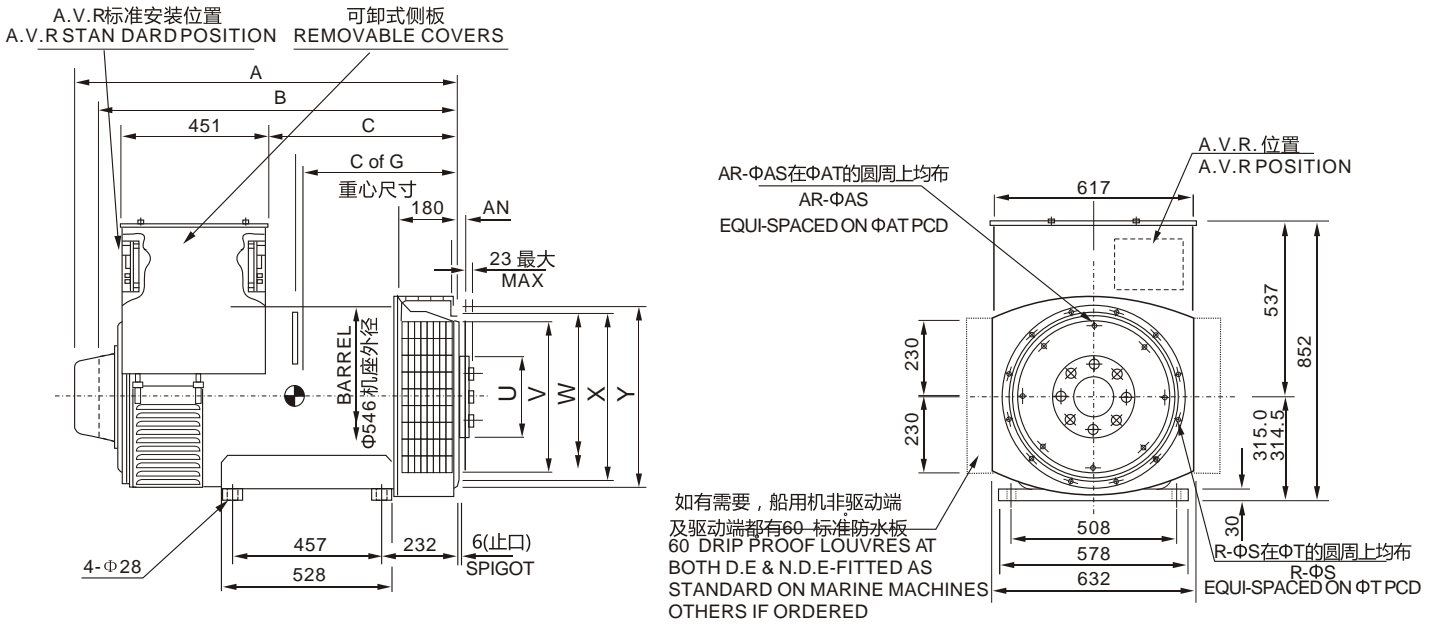

## 尺寸 DIMENSION

型号 TYPE	A	B	CG
WHI4C1	1051	534	463
WHI4D1	1051	534	463
WHI4E1	1191	674	483
WHI4FS1	1191	674	530
WHI4F1	1191	674	530

## 盘片式联轴器 COUPLING DISC

S.A.E.No.	AB	AR	AS	AT	U	Y
11.5	39.68	8	10.3	333.4	250	352.3
14	25.40	8	13.5	438.1	250	466.6
8	15.8	6	16.7	543.0	250	571.1


## 法兰式过渡接套 ADAPTOR

S.A.E.No.	BR	BS	BT	W	X	Y
0	12	14	679.5	626	647.6	711
1/2	12	14	619.1	569	584.1	680
1	12	12.7	530.2	496	511.1	617
2	12	11	466.7	432	447.6	617
3	12	11	428.6	394	409.5	617

## 运输数据 TRANSPORTATION DATA

型号 TYPE	净重 N.W(kg)	毛重 G.W(kg)	包装箱尺寸 PACKAGE SIZE(cm)
WHI4C1	820	880	151×79×107
WHI4D1	880	950	151×79×107
WHI4E1	1010	1065	151×79×107
WHI4FS1	1085	1145	151×79×107
WHI4F1	1125	1185	151×79×107

# WHI4 双支点 DOUBLE-BEARING

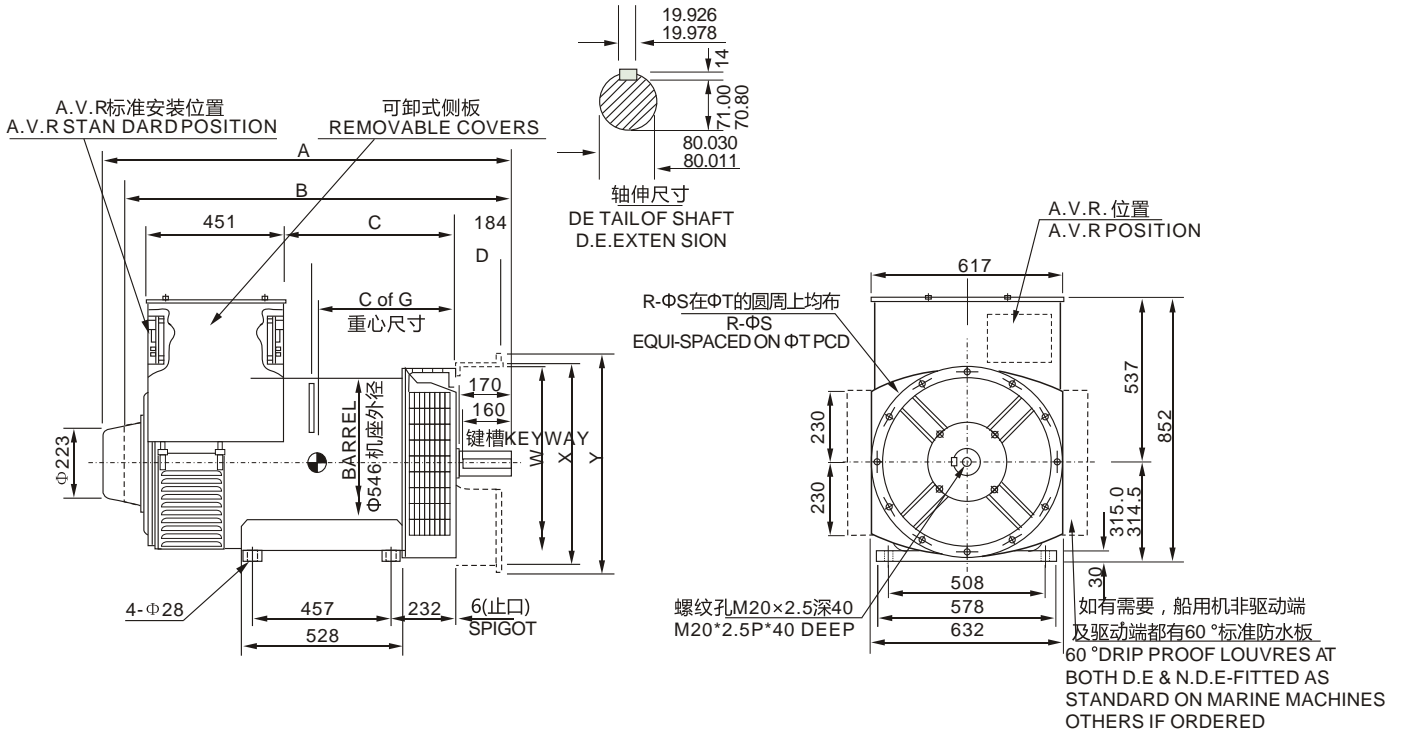

## 尺寸 DIMENSION

型号 TYPE	A	B	CG
WHI4C2	1205	504	433
WHI4D2	1205	504	433
WHI4E2	1345	644	453
WHI4FS2	1345	644	500
WHI4F2	1345	644	500

## 法兰式过渡接套 ADAPTOR

S.A.E.No.	BR	BS	BT	W	X	Y
0	16	14	679.5	632	647.6	711
1/2	12	14	619.1	569	584.1	680
1	12	12.7	530.2	496	511.1	553

## 运输数据 TRANSPORTATION DATA

型号 TYPE	净重 N.W(kg)	毛重 G.W(kg)	包装箱尺寸 PACKAGE SIZE(cm)
WHI4C2	820	880	151×79×107
WHI4D2	880	950	151×79×107
WHI4E2	1010	1065	151×79×107
WHI4FS2	1085	1145	151×79×107
WHI4F2	1125	1185	151×79×107