

# WHI6

## Alternator 无刷交流同步发电机 BRUSHLESS SYNCHRONOUS AC




WHI 6 三相陆用发电机功率  
WHI 6 3-PHASE INDUSTRY ALTERNATORS POWER

		50Hz(1500转/分) 50Hz(1500RPM)			60Hz(1800转/分) 60Hz(1800RPM)		
电 压 (V) VOLTAGE		H级温升(125°C) CLASS H TEMPERATURE-RISE(125°C)			H级温升(125°C) CLASS H TEMPERATURE-RISE(125°C)		
星形串联 STAR-SERIES		380	400	415	416	440	480
星形并联 STAR-PARALLEL		190	200	208	220	230	240
三角形串联 Δ-SERIES		220	230	240	254	266	277
WHI 6 C	额定容量 RATED CAPACITY	800	810	800	925	963	1000
	额定功率 RATED POWER	640	640	640	740	770	800
	效 率 EFFICIENCY	94.1	94.4	94.5	94.3	94.4	94.6
WHI 6 D	额定容量 RATED CAPACITY	912.5	944	912.5	1063	1075	1125
	额定功率 RATED POWER	730	755	730	850	860	900
	效 率 EFFICIENCY	94.8	95.0	95.1	94.9	95.1	95.2
WHI 6 E	额定容量 RATED CAPACITY	1025	1063	1025	1225	1275	1325
	额定功率 RATED POWER	820	850	850	980	1020	1060
	效 率 EFFICIENCY	95.1	95.3	95.5	95.1	95.2	95.3
WHI 6 F	额定容量 RATED CAPACITY	1138	1175	1138	1250	1313	1375
	额定功率 RATED POWER	910	940	910	1000	1050	1100
	效 率 EFFICIENCY	95.1	95.2	95.5	95.1	95.2	95.5

注：• 所有发电机额定功率基于环境温度40°C海拔1000m以内。 • 可以从单个绕组获得宽范围的电压，也可通过12个出线端重组获得。  
• 其他电压范围的发电机要根据用户需要制造。

Note: • The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level  
• Extended range voltage can be got from single windings or from 12-leads adjusted • Other special voltage range can be met by FIRSTALL company

# WHI6 | 单支点 SINGLE-BEARING

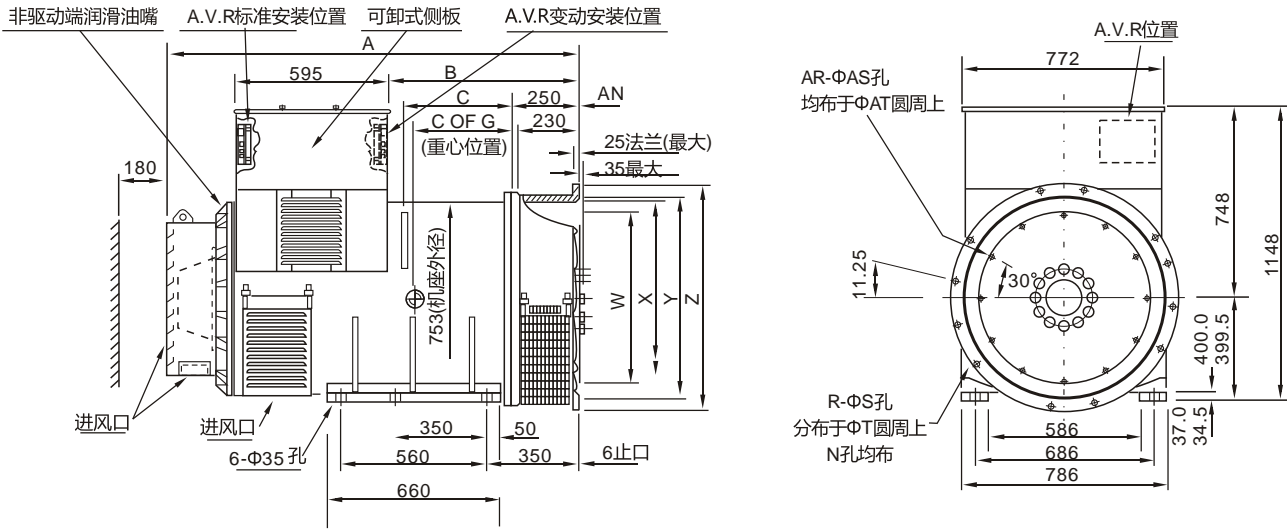

### 尺寸 DIMENSION

型号TYPE	A	B	C	C of G
WHI6A	1578	726	405	587
WHI6B	1578	726	405	591
WHI6C	1578	726	405	597
WHI6D	1578	726	405	607
WHI6E	1578	726	405	625
WHI6F	1679	826	464	735

### 法兰式过渡接套 ADAPTOR

S.A.E.No.	X	Y	Z	N	R	S	T
00	772	787.3	883	16	16	14	851.1
0	632	647.6	810	16	16	14	679.5
1/2	559	584.1	810	16	16	14	619.1


### 盘片式联轴器 COUPLING DISC

S.A.E.No.	W	AN	AR	AS	AT
14	466.64	25.40	8	13.5	438.1
18	571.42	15.87	6	16.7	543
21	673.02	0	12	16.7	641.3
24	733.3	0	12	20.7	692

### 运输数据 TRANSPORTATION DATA

型号 TYPE	净重 N.W(kg)	毛重 G.W(kg)	包装箱尺寸 PACKAGE SIZE(cm)
WHI6A	1950	2020	180×100×145
WHI6B	1970	2050	180×100×145
WHI6C	2030	2100	180×100×145
WHI6D	2190	2260	180×100×145
WHI6E	2420	2490	180×100×145
WHI6F	2750	2820	180×100×145

# WHI6 | 双支点 DOUBLE-BEARING

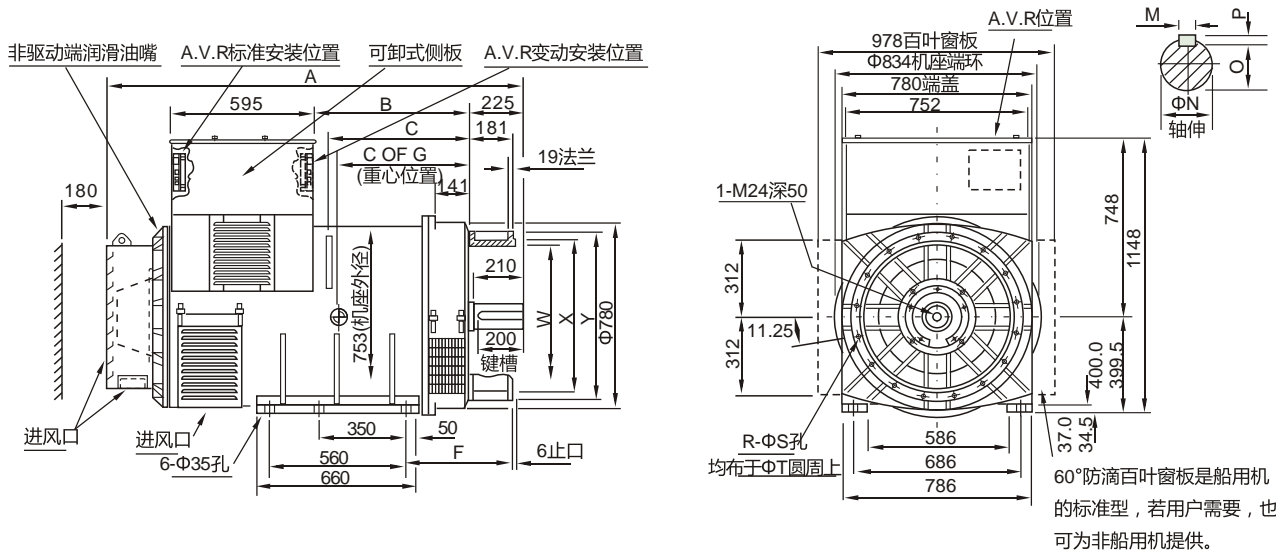

## 尺寸 DIMENSION

型号TYPE	A	B	C	C of G
WHI6A	1718	640	570	587
WHI6B	1718	640	570	591
WHI6C	1718	640	570	597
WHI6D	1718	640	570	607
WHI6E	1718	640	570	625
WHI6F	1904	826	716	753

## 法兰式过渡接套 ADAPTOR

S.A.E.No.	W	X	Y	R	S	T
00	768	787.3	882	16	14	851.1
0	621	647.6	711	16	14	679.5
1/2	568	584.1	648	12	14	619.1

## 轴伸尺寸

ABCDE				
ABCDE	27.978	110.035	100.0	16
	27.926	110.013	99.8	
F	31.974	125.040	114.0	18
	31.912	125.015	113.8	

## 运输数据 TRANSPORTATION DATA

型号TYPE	净重 N.W(kg)	毛重 G.W(kg)	包装箱尺寸 PACKAGE SIZE(cm)
WHI6A	1960	2030	200×105×145
WHI6B	1980	2050	200×105×145
WHI6C	2040	2110	200×105×145
WHI6D	2210	2280	200×105×145
WHI6E	2430	2500	200×105×145
WHI6F	2760	2830	200×105×145