

QYI274K

THREE-PHASE SYNCHRONOUS GENERATOR

WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C					Method of Cooling	Air cooling							
Temperature Rise	125 °C					Direction of Rotation	Clockwise							
Insulation Class	H					Maximum Over-speed	2250r/min							
Power Factor	0.8					Degree of Protection / Enclosure	IP21							
Excitation	Brushless					Altitude	1000m							
Winding Pitch	2/3					Stator winding	DLL							
Pole	4					Number of Terminal	12							
Duty	S1- Continuous					Rotor	With damping cage							
Waveform	TIF<50					THF<2%								
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N													
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%													
AVR MODEL AVR	Standard	Selection				PMG								
	SX460	AS440		KRS440	MX341B		MX321							
Voltage Regulation - in steady state condition	±1.0	±1.0		±1.0	±0.5		±0.5							
Short Circuit Current Capacity	Control does not sustain a short circuit current					850A								
Electrical Characteristic														
Frequency	Hz	50				60								
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277					
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138					
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277					
Rated power at Class H (125 °C) temperature rise	kVA	250	250	250	N/A	291	299	312.5	312.5					
	kW	200.0	200.0	200.0	N/A	232.8	239.2	250.0	250.0					
Efficiency at Class H (P.F.=0.8)	4/4%	92.4	92.7	92.8	N/A	92.6	92.8	92.9	93					
	3/4%	93.3	93.4	93.3	N/A	93.3	93.4	93.4	93.4					
	2/4%	93.4	93.3	93.2	N/A	93.2	93.2	93.1	93.1					
Efficiency at Class H (P.F.=1.0)	4/4%	94.1	94.3	94.4	N/A	94.1	94.3	94.3	94.5					
	3/4%	94.8	94.9	95	N/A	94.8	94.9	94.9	95					
	2/4%	94.9	94.9	94.8	N/A	94.7	94.7	94.7	94.7					
Reactances (%) at Class H														
Direct axis synchronous reactance unsaturated	Xd	2.825	2.55	2.369	N/A	3.161	2.903	2.776	2.55					
Direct axis transient reactance saturated	X'd	0.132	0.119	0.111	N/A	0.148	0.136	0.13	0.119					
Direct axis subtransient reactance saturated	X''d	0.086	0.078	0.072	N/A	0.097	0.089	0.085	0.078					
Quadrature axis synchronous reactance unsaturated	Xq	1.263	1.14	1.059	N/A	1.413	1.298	1.241	1.14					
Quadrature axis subtransient reactance saturated	X''q	0.152	0.137	0.127	N/A	0.17	0.156	0.149	0.137					
Leakage reactance	X1	0.066	0.06	0.056	N/A	0.074	0.068	0.065	0.06					
Negative sequence reactance saturated	X2	0.12	0.108	0.1	N/A	0.134	0.123	0.118	0.108					
Zero sequence reactance unsaturated	X0	0.022	0.02	0.019	N/A	0.025	0.023	0.022	0.02					
Short-circuit ratio	Kcc	0.3540	0.3922	0.4221	N/A	0.3164	0.3445	0.3602	0.3922					
Short-circuit transient time constant (sec.)	T'd	0.049												
Subtransient time constant (sec.)	T''d	0.02												
Open circuit time constant (sec.)	T'do	1.27												
Armature time constant (sec.)	Tα	0.018												
Stator Winding Resistance (20°C)	ohm	0.01257												
Rotor Winding Resistance (20°C)	ohm	2.07												
Exciter Stator Resistance (20°C)	ohm	20												
Exciter Rotor Phase resistance	ohm	0.091												
No load excitation current	io (A)	0.5	0.52	0.6	N/A	0.5	0.51	0.52	0.53					
Full load excitation current	ic(A)	2.4	2.4	2.5	N/A	2.4	2.4	2.5	2.5					
Cooling air requirement	m³/sec	0.58m³/s 1230cfm				0.69m³/s 1463cfm								
Mechanical Characteristic														
Configuration	Single Bearing				Double Bearing									
Type of Construction	B2-SAE				IM B34									
Total Weight - kgs	688				678									
Weight wound stator - kgs	304				304									
Weight wound rotor - kgs	272.6				259									
Inertia (J) [kgm²]	2.3934kgm²				2.1102kgm²									
Drive end bearing / Lubrication	BALL.6310-2RS(ISO)				BALL.6310-2RS(ISO)									
Non-drive end bearing / Lubrication	BALL.6310-2RS(ISO)				BALL.6310-2RS(ISO)									
Packing crate size (cm)	115X63X94				120X63X94									


QYI274K
Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
kVA		229.0	229.0	229.0	N/A	250.0	250.0	250.0	N/A	265.0	265.0	265.0	N/A	275.0	275.0	275.0	N/A
kW		183.2	183.2	183.2	N/A	200.0	200.0	200.0	N/A	212.0	212.0	212.0	N/A	220.0	220.0	220.0	N/A
Efficiency (%)		92.8	93.0	93.1	N/A	92.5	92.7	92.8	N/A	92.2	92.4	92.6	N/A	92.0	92.2	92.4	N/A
kW Input		197.4	197.0	196.8	N/A	216.2	215.7	215.5	N/A	229.9	229.4	228.9	N/A	239.1	238.6	238.1	N/A

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
kVA		267.0	275.0	286.5	288.0	291.0	299.0	312.5	312.5	304.0	312.5	331.3	331.3	312.0	320.0	343.8	343.8
kW		213.6	220.0	229.2	230.4	232.8	239.2	250.0	250.0	243.2	250.0	265.0	265.0	249.6	256.0	275.0	275.0
Efficiency (%)		92.9	93.0	93.1	93.2	92.6	92.7	92.8	92.9	92.4	92.6	92.5	92.7	92.2	92.4	92.3	92.5
kW Input		229.9	236.6	246.2	247.3	251.4	258.0	269.4	269.1	263.2	270.0	286.5	285.9	270.7	277.1	298.0	297.3

DIMENSIONS

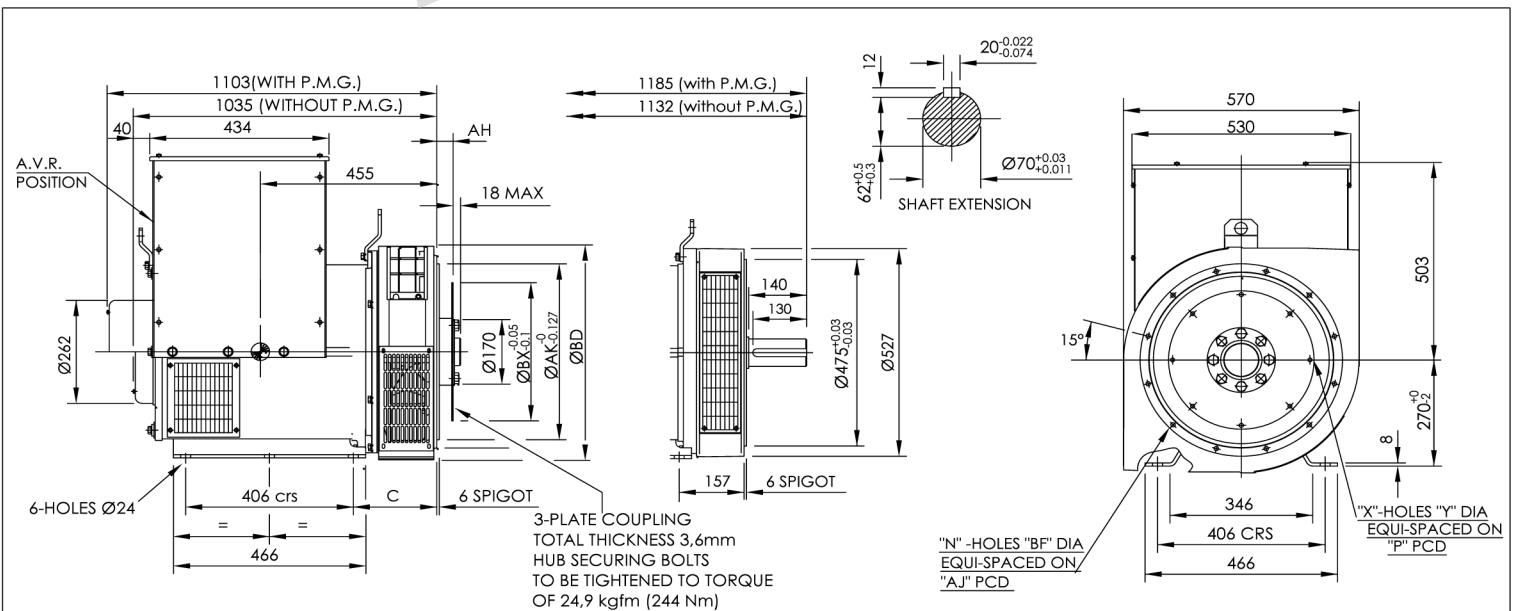

COUPLING DISC					
SAE	BX	P	X	Y	AH
14	466.72	438.15	8	13.5	25.4
11.5	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8

SAE	BD	AK	Y	BF	n	C
SAE3	451	409.58	428.62	11	12	202
SAE2	490	447.68	466.72	11	12	202
SAE1	553	511.17	530.22	12.7	12	216.3




			QYI 274K	1:1	QT002Z033.8
VER	MOD	DRW	Date	SAE:	A2
Design		APP	Date	CHK	1ST ALL 鑫一
CHK			2018.01	GB/T1804-m	mm

**50
Hz**

QYI274K

Winding 311





THREE PHASE EFFICIENCY CURVES

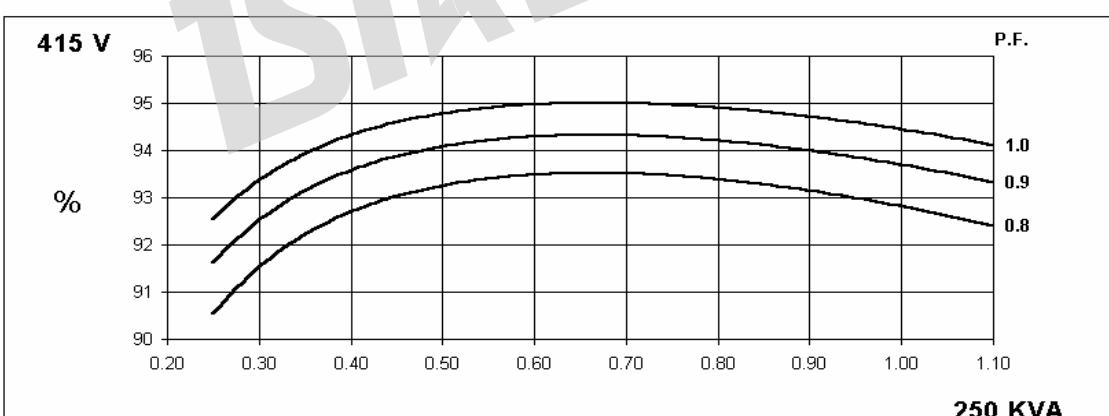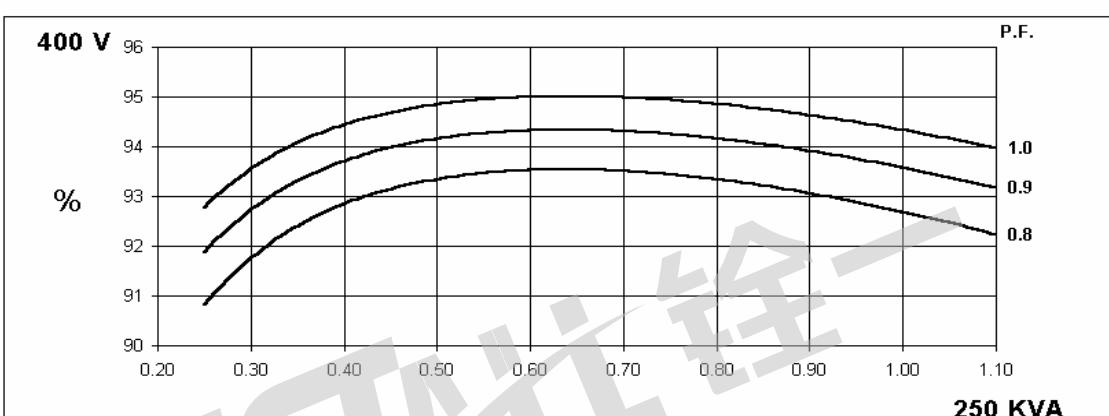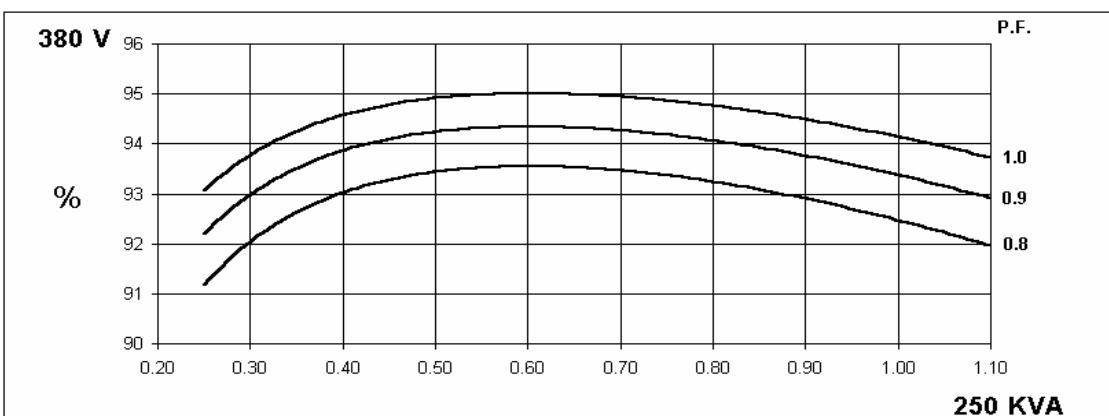

**60
Hz**

**QYI274K
Winding 311**


THREE PHASE EFFICIENCY CURVES

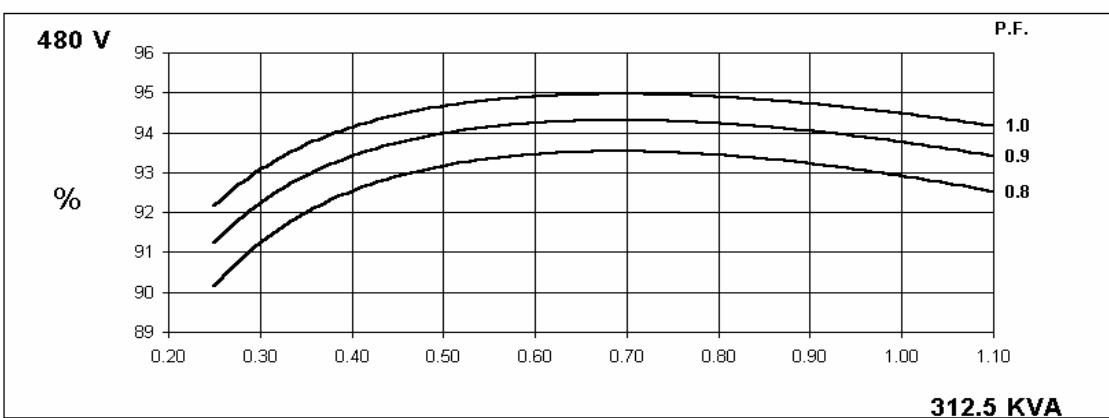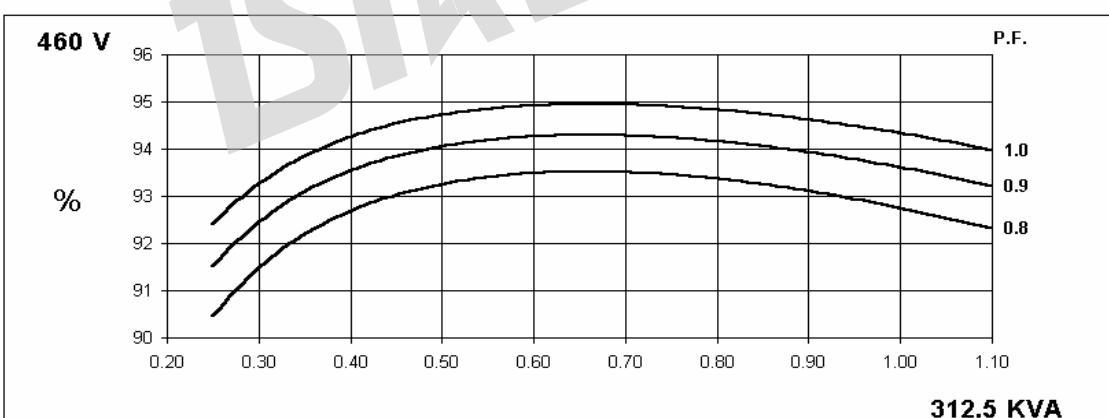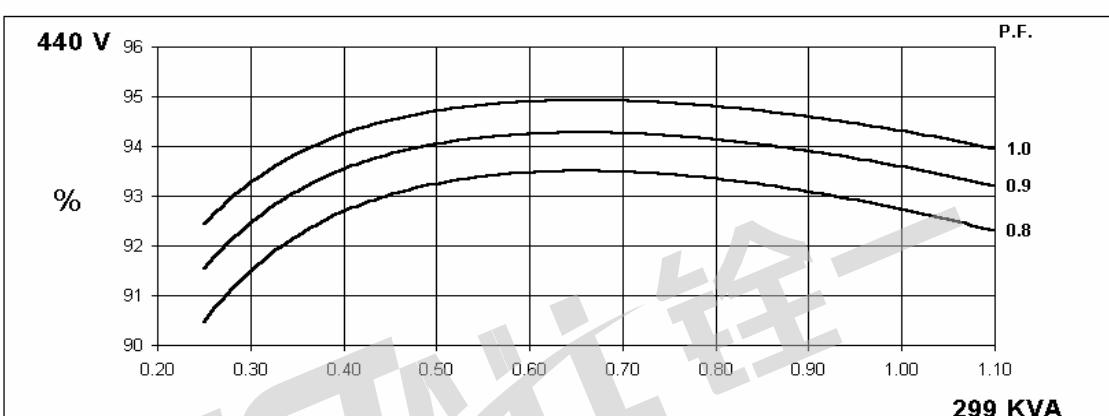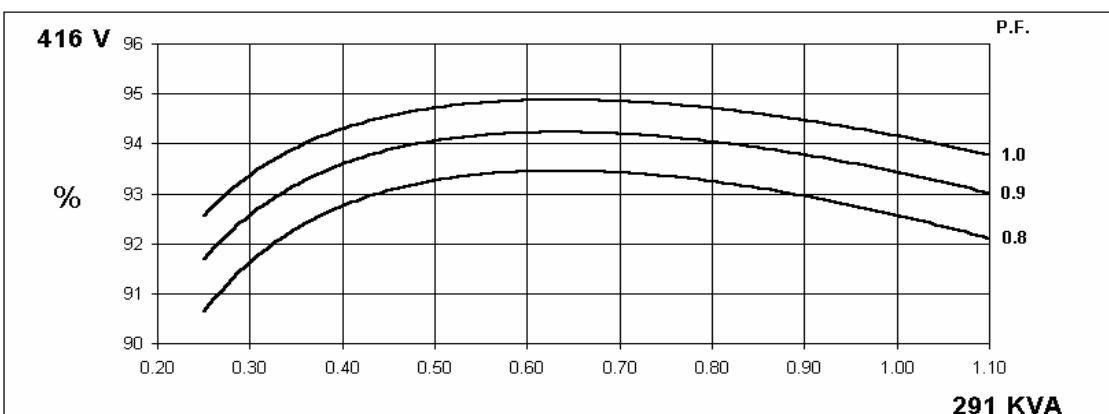

QYI274K


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50 Hz

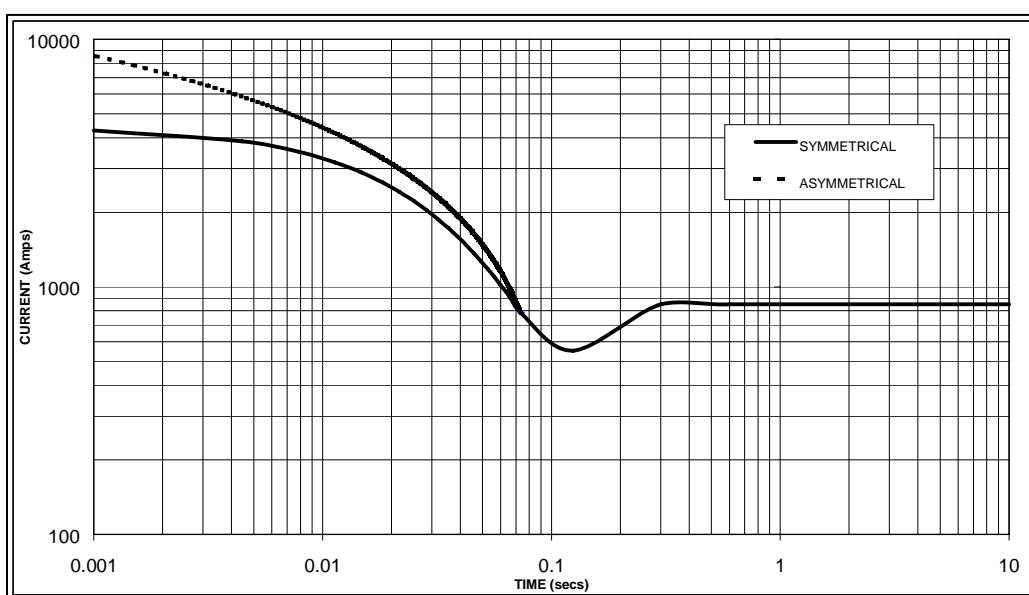

Sustained Short Circuit = 850 Amps

60 Hz

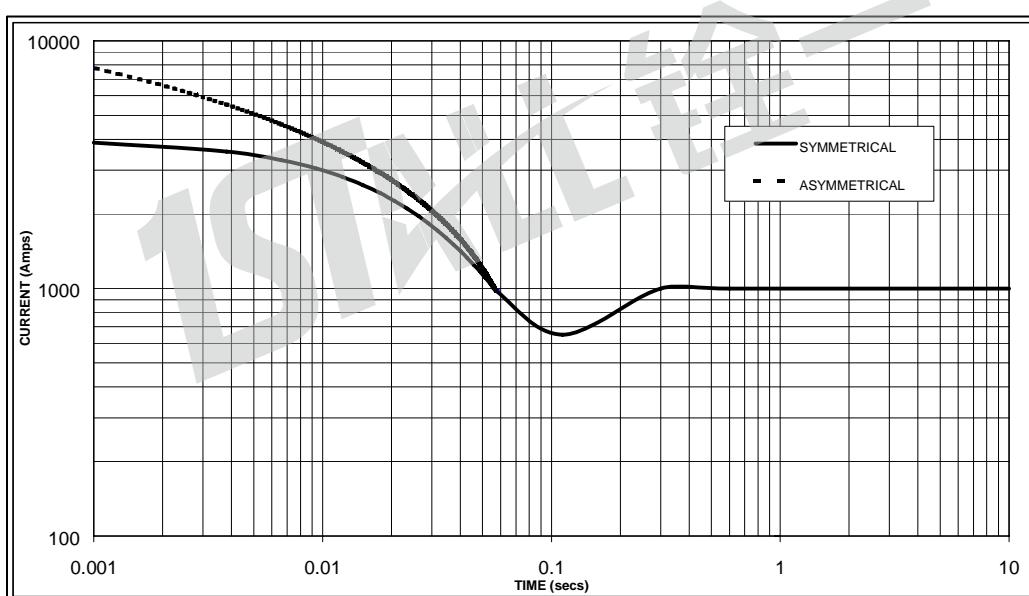

Sustained Short Circuit = 1,000 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.07
415v	X 1.10	460v	X 1.12
		480v	X 1.16

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3


Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

QYI274K
Winding 311

INERTIA

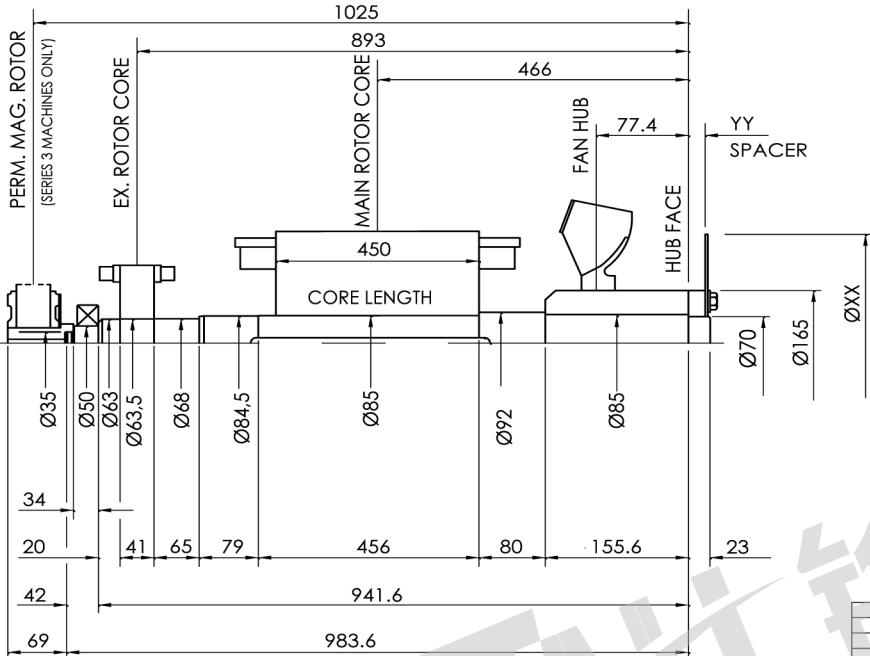


COMPONENT	Wt kg	J kgm ²
EX. ROTOR	12.28	0.0726
MAIN ROTOR	185.78	2.0274
FAN	8.47	0.157
SHAFT	40.826	0.0353
HUB	19.805	0.0861
TOTAL	266.461	2.3594
PERM. MAG.	5,450	0.0150
TOTAL	272.611	2.3934

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
* 10	314	14.3	5.55	0.0266
! 11½	352	14.3	4.95	0.0423
! 14	467	-	4.74	0.1317

QYI 274K			1:1	OQY201043
VER	MOD	DRW	Date	
CHK		Date	2018.01	mm

WWW.FIRSTALLPOWER.COM

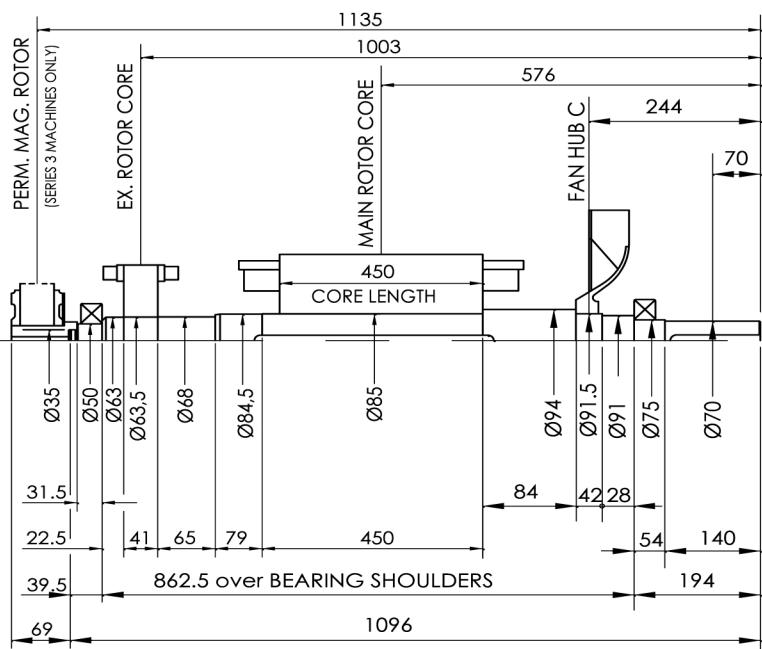

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	12.28	0,0726
MAIN ROTOR	200.195	1.93
FAN	3.389	0,0709
SHAFT	43.136	0,0367
TOTAL	259	2.1102
PERM. MAG.	5,450	0,0150
TOTAL	300.45	2.1252

QYI 274K			1:1	OQY201044
VER	MOD	DRW	Date	
CHK		Date	2018.01	mm

WWW.FIRSTALLPOWER.COM

1ST ALL 鑫一