

# QYI274C

## THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling	Air cooling		
Temperature Rise	125 °C	Direction of Rotation	Clockwise		
Insulation Class	H	Maximum Over-speed	2250r/min		
Power Factor	0.8	Degree of Protection / Enclosure	IP23		
Excitation	Brushless	Altitude	1000m		
Winding Pitch	2/3	Stator winding	DLL		
Pole	4	Number of Terminal	12		
Duty	S1- Continuous	Rotor	With damping cage		
Waveform	TIF<50			THF<2%	
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N				
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%				
AVR MODEL AVR	Standard	Selection		PMG	
	SX460	AS440	KRS440	MX341B	MX321
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	±0.5	±0.5
Short Circuit Current Capacity	Control does not sustain a short circuit current			430A	

### Electrical Characteristic

Frequency	Hz	50				60			
Voltage ( series star ) <b>Y</b>	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage ( parallel star ) <b>YY</b>	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage ( series delta ) <b>Δ</b>	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	100	100	100	N/A	112.5	117.5	117.5	125
	kW	80.0	80.0	80.0	N/A	90.0	94.0	94.0	100.0
Efficiency at Class H (P.F.=0.8)	4/4%	89.9	90.2	90.8	N/A	90.1	90.6	91	91
	3/4%	91	91.4	91.7	N/A	91.5	91.7	92	92
	2/4%	92.1	92.1	92.1	N/A	92.2	92.4	92.5	92.7
Efficiency at Class H (P.F.=1.0)	4/4%	92	92.3	92.8	N/A	92.1	92.5	92.9	93
	3/4%	93	93.3	93.5	N/A	93.2	93.5	93.7	93.8
	2/4%	93.9	94	94	N/A	94	94.1	94.1	94.1

### Reactances (%) at Class H

		2.45	2.21	2.05	N/A	2.76	2.58	2.36	2.3
Direct axis synchronous reactance unsaturated	X <sub>d</sub>								
Direct axis transient reactance saturated	X' <sub>d</sub>	0.2	0.18	0.17	N/A	0.24	0.22	0.21	0.2
Direct axis subtransient reactance saturated	X'' <sub>d</sub>	0.14	0.13	0.12	N/A	0.16	0.15	0.14	0.13
Quadrature axis synchronous reactance unsaturated	X <sub>q</sub>	1.59	1.43	1.33	N/A	1.58	1.48	1.35	1.32
Quadrature axis subtransient reactance saturated	X'' <sub>q</sub>	0.18	0.16	0.15	N/A	0.23	0.21	0.2	0.19
Leakage reactance	X <sub>l</sub>	0.07	0.06	0.06	N/A	0.08	0.07	0.07	0.07
Negative sequence reactance saturated	X <sub>2</sub>	0.16	0.14	0.13	N/A	0.19	0.18	0.16	0.16
Zero sequence reactance unsaturated	X <sub>0</sub>	0.1	0.09	0.08	N/A	0.12	0.11	0.1	0.1
Short-circuit ratio	K <sub>cc</sub>	0.4082	0.4525	0.4878	N/A	0.3623	0.3876	0.4237	0.4348

Short-circuit transient time constant (sec.)	T' <sub>d</sub>	0.028							
Subtransient time constant (sec.)	T'' <sub>d</sub>	0.001							
Open circuit time constant (sec.)	T' <sub>do</sub>	0.8							
Armature time constant (sec.)	T <sub>a</sub>	0.007							
Stator Winding Resistance (20°C)	ohm	0.061							
Rotor Winding Resistance (20°C)	ohm	1.14							
Exciter Stator Resistance (20°C)	ohm	20							
Exciter Rotor Phase resistance	ohm	0.078							
No load excitation current	i <sub>o</sub> (A)	0.5	0.52	0.6	0.5	0.5	0.51	0.52	0.53
Full load excitation current	i <sub>c</sub> (A)	1.8	1.8	1.9	1.8	1.8	1.8	1.9	1.9
Cooling air requirement	m <sup>3</sup> /sec	0.514m <sup>3</sup> /s 1090cfm				0.617m <sup>3</sup> /s 1308cfm			

### Mechanical Characteristic

Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	371	367
Weight wound stator - kgs	125	125
Weight wound rotor - kgs	133.78	122.82
Inertia (J) [kgm <sup>2</sup> ]	1.0288kgm <sup>2</sup>	0.9781kgm <sup>2</sup>
Drive end bearing / Lubrication		BALL.6315-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6310-2RS(ISO)	BALL.6310-2RS(ISO)
Packing crate size (cm)	88X63X94	92X63X94


# QYI274C

## Winding 311 / 0.8 Power Factor

### RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
<b>50 Hz</b>	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	84.0	84.0	84.0	N/A	100.0	100.0	100.0	N/A	106.0	106.0	106.0	N/A	110.0	110.0	110.0	N/A
	kW	67.2	67.2	67.2	N/A	80.0	80.0	80.0	N/A	84.8	84.8	84.8	N/A	88.0	88.0	88.0	N/A
	Efficiency (%)	90.7	91.1	91.3	N/A	89.8	90.3	90.6	N/A	89.5	90.0	90.4	N/A	89.2	89.8	90.2	N/A
	kW Input	74.1	73.8	73.6	N/A	89.1	88.6	88.3	N/A	94.7	94.2	93.8	N/A	98.7	98.0	97.6	N/A
<b>60 Hz</b>	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	97.5	106.3	106.3	112.5	112.5	117.5	117.5	125.0	116.3	125.0	125.0	132.5	120.0	127.5	127.5	137.5
	kW	78.0	85.0	85.0	90.0	90.0	94.0	94.0	100.0	93.0	100.0	100.0	106.0	96.0	102.0	102.0	110.0
	Efficiency (%)	90.9	91.0	91.4	91.5	90.2	90.6	91.0	91.1	90.0	90.2	90.7	90.8	89.8	90.1	90.6	90.6
	kW Input	85.8	93.5	93.0	98.4	99.8	103.8	103.3	109.8	103.4	110.9	110.3	116.7	106.9	113.2	112.6	121.4

### DIMENSIONS

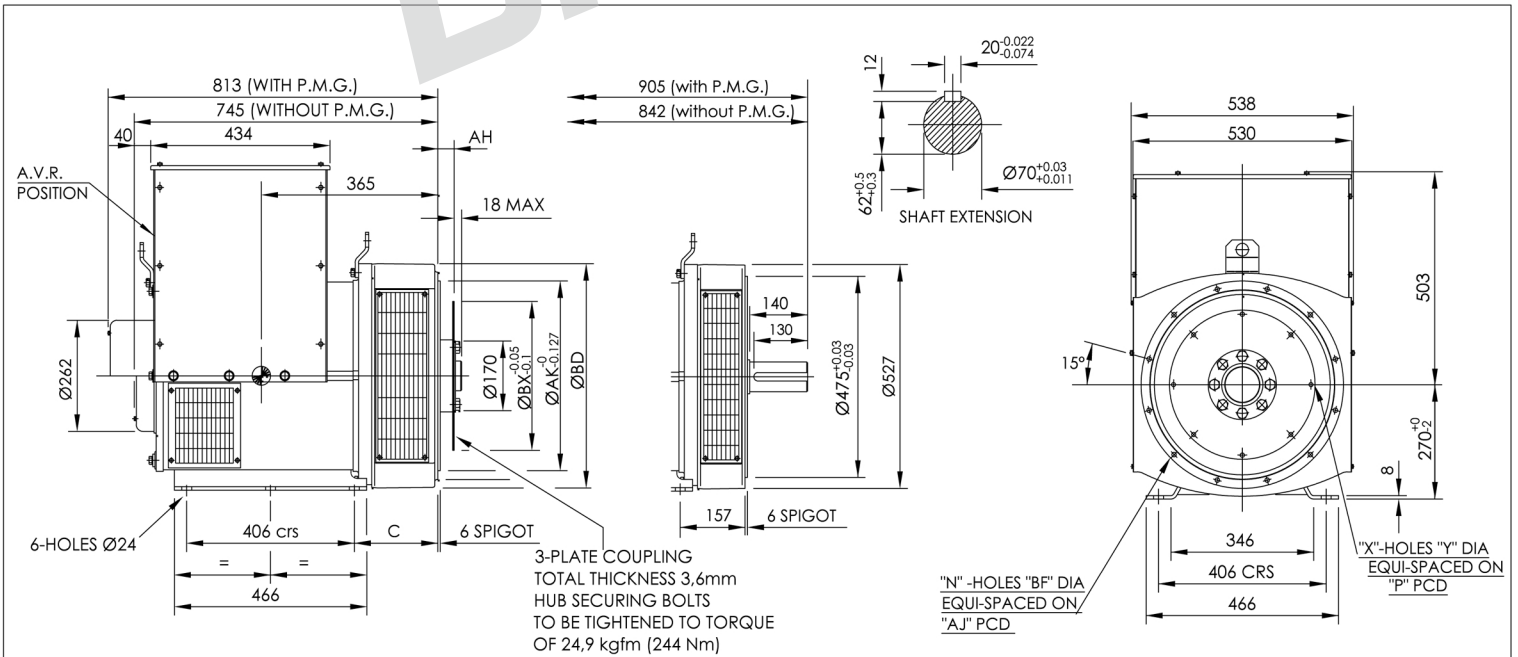

COUPLING DISC					
SAE	BX	P	X	Y	AH
14	466.72	438.15	8	13.5	25.4
11.5	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8




FLANGE (mm)						
SAE号	BD	AK	AJ	BF	n	C
SAE3	451	409.58	428.62	11	12	202
SAE2	490	447.68	466.72	11	12	202
SAE1	553	511.17	530.22	12.7	12	216.3

QYI 274C				1:1	QT002Z033.1
VER	MOD	DRW	Date	SAE:	A2
Design	APP	CHK	Date	GB/T1804-m	mm
			2018.01		

50  
Hz

QYI274C  
Winding 311





THREE PHASE EFFICIENCY CURVES

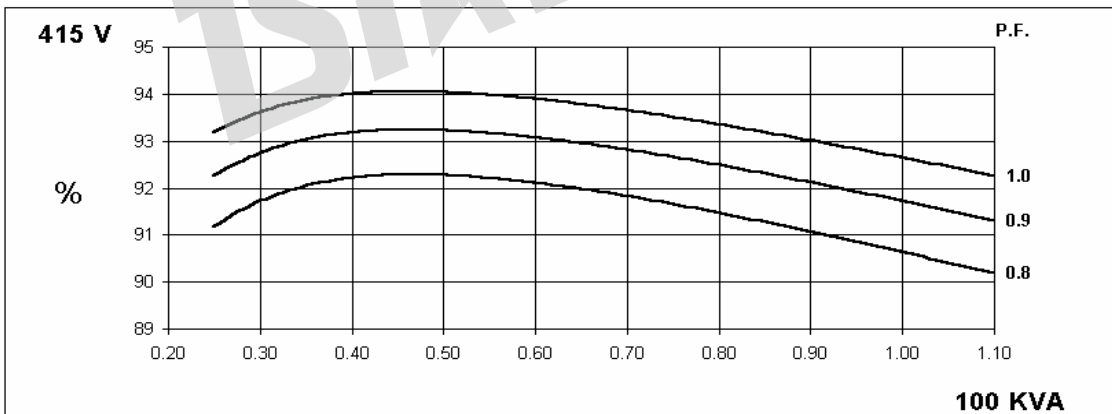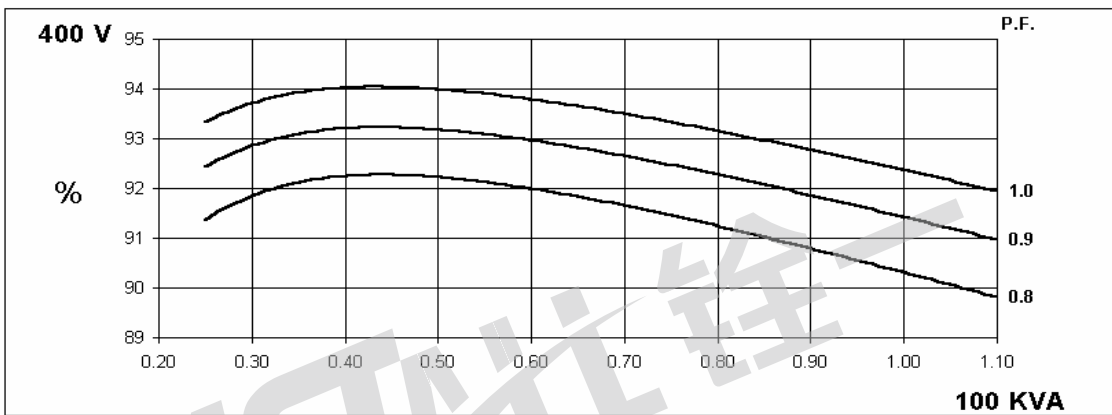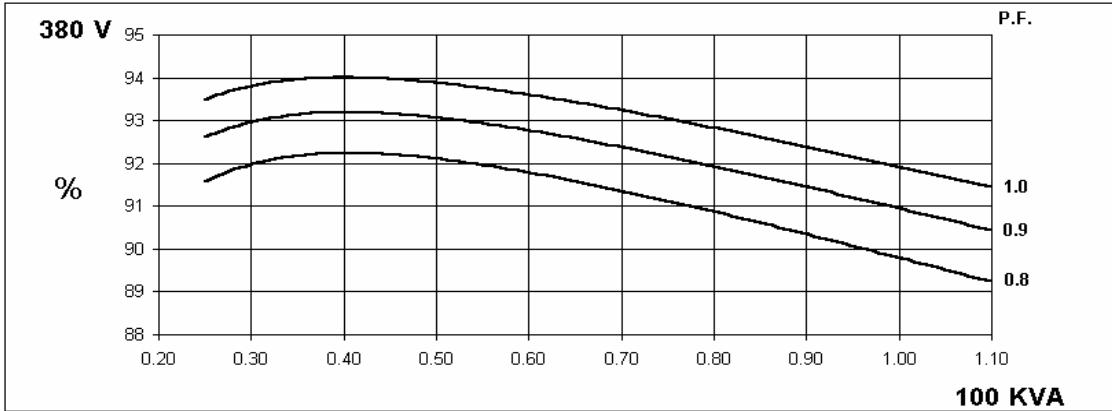

60  
Hz

UCI274C  
Winding 311


THREE PHASE EFFICIENCY CURVES

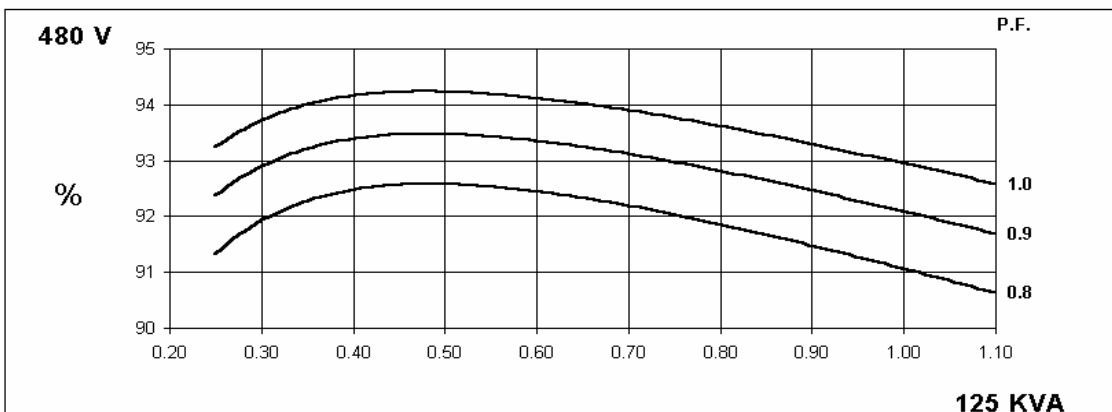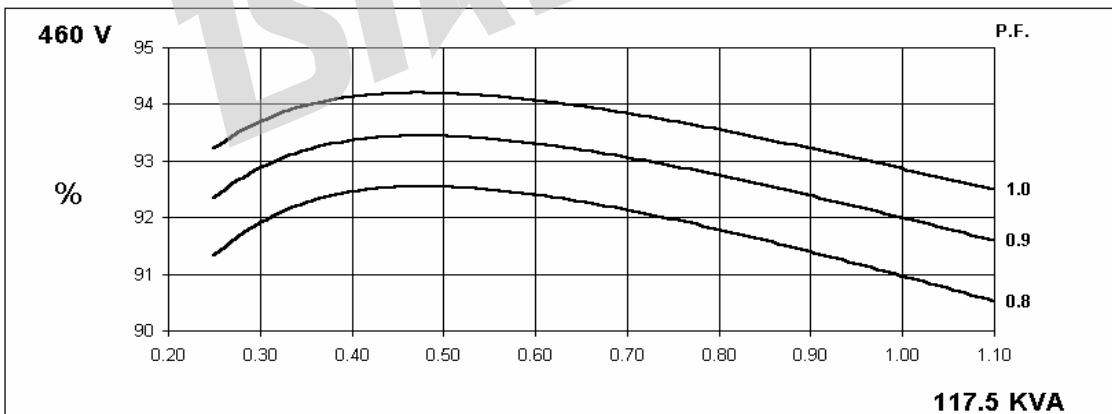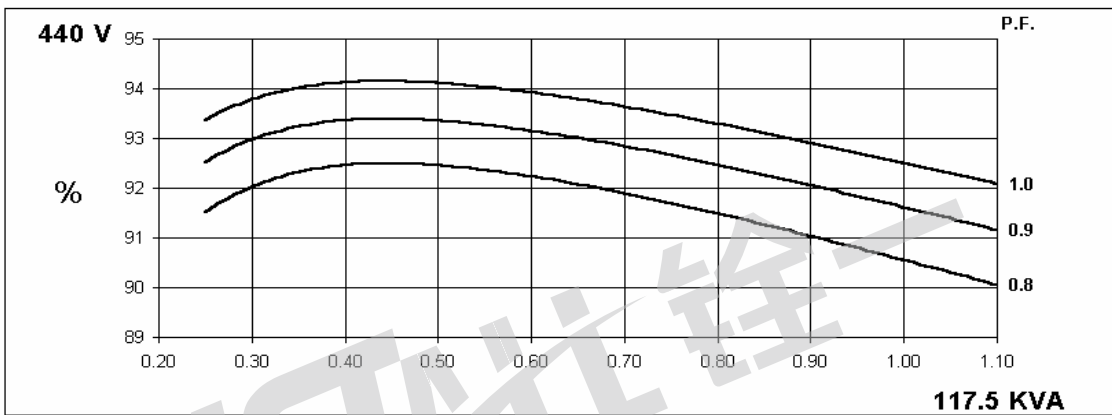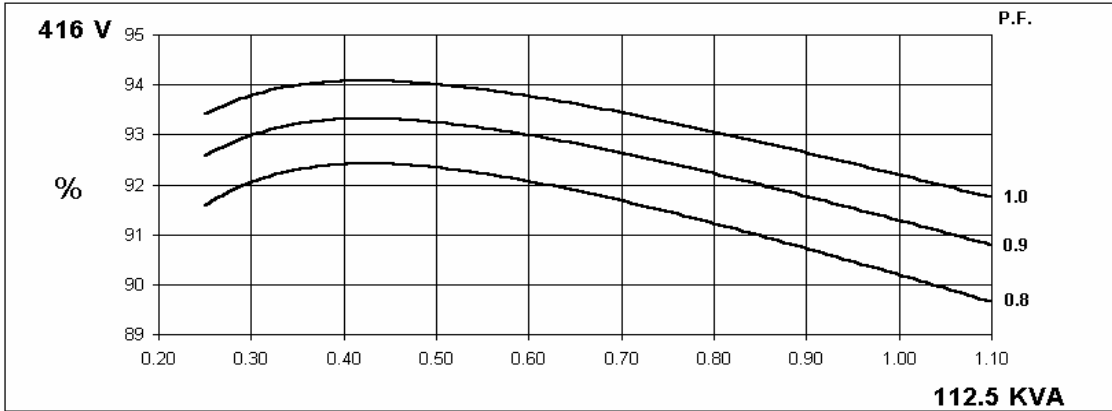

# QYI274C


## Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50  
Hz

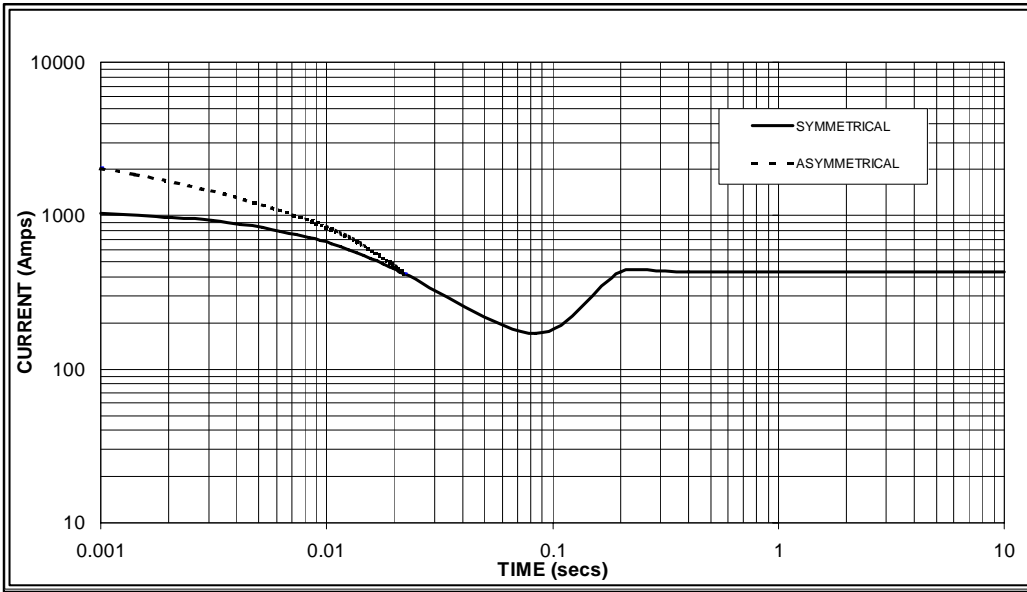

Sustained Short Circuit = 430 Amps

60  
Hz

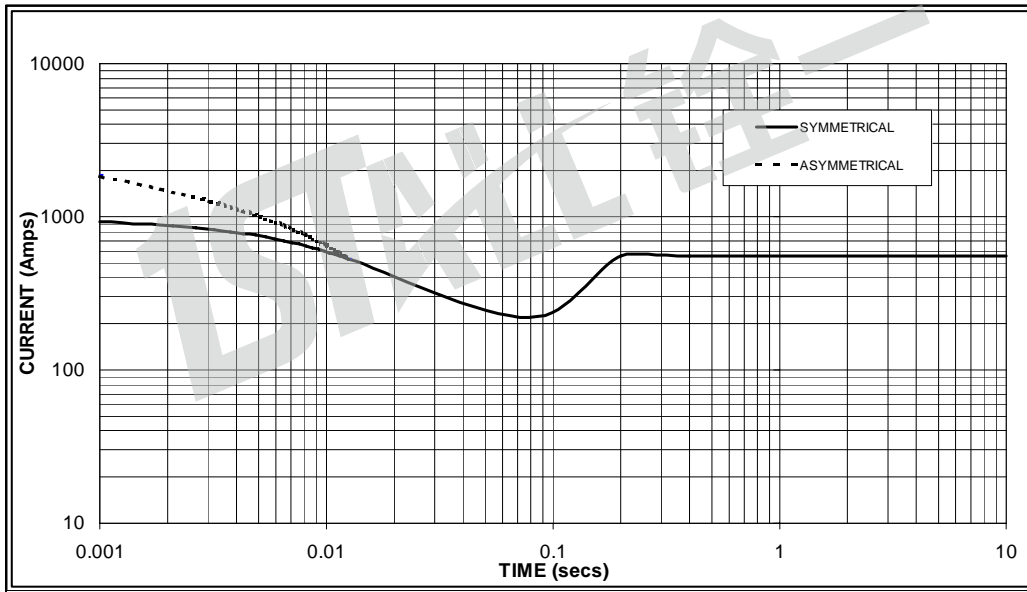

Sustained Short Circuit = 550 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.07	440v	X 1.06
415v	X 1.12	460v	X 1.12
		480v	X 1.17

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :


Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

# QYI274C

## Winding 311

### INERTIA

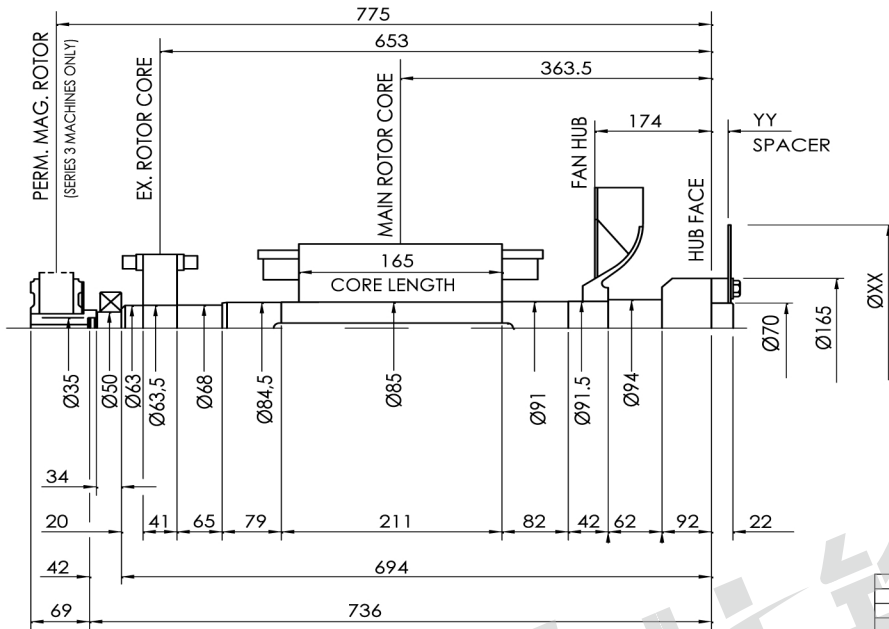

COMPONENT	Wt kg	J kgm <sup>2</sup>
EX. ROTOR	8,490	0,0508
MAIN ROTOR	74.570	0,8155
FAN	3,389	0,0709
SHAFT	31.005	0,0275
HUB	10.878	0,0491
TOTAL	128.332	1.0138
PERM. MAG.	5,450	0,0150
TOTAL	133.782	1.0288

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm <sup>2</sup>
	XX	YY		
* 10	314	14,3	5.55	0,0266
* 11½	352	-	2.64	0,0423
! 11½	352	14,3	4.95	0,0423
! 14	467	-	4.74	0,1317


VER	MOD	DRW	Date
Design	APP	CHK	Date
			2018.01

QYI 274C  
INERTIA

1:1  
0QY2010029



WWW.FIRSTALLPOWER.COM

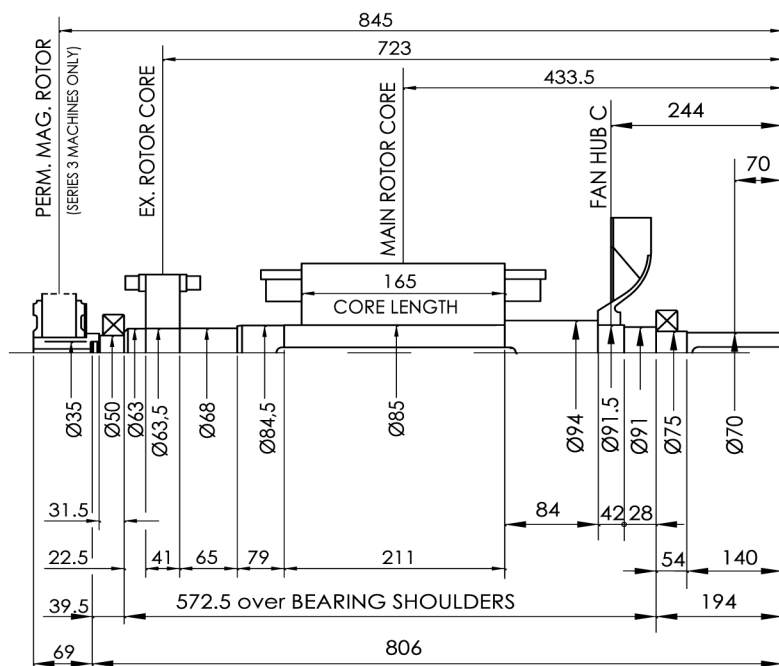

COMPONENT	Wt kg	J kgm <sup>2</sup>
EX. ROTOR	8.49	0,0508
MAIN ROTOR	74.57	0,8155
FAN	3,389	0,0709
SHAFT	30.921	0,0259
TOTAL	117.37	0,9631
PERM. MAG.	5,450	0,0150
TOTAL	122.82	0,9781

VER	MOD	DRW	Date
Design	APP	CHK	Date
			2018.01

QYI 274C  
INERTIA

1:1  
0QY2010030



WWW.FIRSTALLPOWER.COM