

QYI224G

THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling	Air cooling	
Temperature Rise	125 °C	Direction of Rotation	Clockwise	
Insulation Class	H	Maximum Over-speed	2250r/min	
Power Factor	0.8	Degree of Protection / Enclosure	IP23	
Excitation	Brushless	Altitude	1000m	
Winding Pitch	2/3	Stator winding	DLL	
Pole	4	Number of Terminal	12	
Duty	S1- Continuous	Rotor	With damping cage	
Waveform	TIF<50		THF<2%	
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N			
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%			
AVR MODEL AVR	Standard	Selection		PMG
	SX460	AS440	KRS440	MX341B MX321
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	±0.5 ±0.5
Short Circuit Current Capacity	Control does not sustain a short circuit current			390A

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	85	85	85	75	93.8	97.5	100	103.8
	kW	68.0	68.0	68.0	60.0	75.0	78.0	80.0	83.0
Efficiency at Class H (P.F.=0.8)	4/4%	89.9	90.1	90.2	90.9	90.5	90.8	90.9	91
	3/4%	90.8	91	91	91.1	91.3	91.5	91.6	91.7
	2/4%	91.2	91.1	91.1	90.9	91.8	91.8	91.8	91.8
Efficiency at Class H (P.F.=1.0)	4/4%	92.1	92.4	92.7	93.1	92.6	92.8	93	93.1
	3/4%	92.9	93	93.1	93.2	93.3	93.4	93.6	93.7
	2/4%	93.3	93.3	93.2	93	93.7	93.8	93.8	93.7

Reactances (%) at Class H

		2.43	2.2	2.04	1.6	2.66	2.47	2.32	2.21
Direct axis synchronous reactance unsaturated	X _d								
Direct axis transient reactance saturated	X' _d	0.19	0.17	0.16	0.13	0.2	0.19	0.17	0.17
Direct axis subtransient reactance saturated	X'' _d	0.13	0.12	0.11	0.09	0.14	0.13	0.12	0.12
Quadrature axis synchronous reactance unsaturated	X _q	1.12	1.01	0.94	0.74	1.22	1.13	1.06	1.01
Quadrature axis subtransient reactance saturated	X'' _q	0.17	0.15	0.14	0.11	0.15	0.14	0.13	0.12
Leakage reactance	X _l	0.07	0.06	0.06	0.05	0.08	0.07	0.07	0.07
Negative sequence reactance saturated	X ₂	0.16	0.14	0.13	0.1	0.15	0.14	0.13	0.12
Zero sequence reactance unsaturated	X ₀	0.11	0.1	0.09	0.07	0.11	0.1	0.1	0.09
Short-circuit ratio	K _{cc}	0.4115	0.4545	0.4902	0.6250	0.3759	0.4049	0.4310	0.4525

Short-circuit transient time constant (sec.)	T' _d	0.03							
Subtransient time constant (sec.)	T'' _d	0.008							
Open circuit time constant (sec.)	T' _{do}	0.75							
Armature time constant (sec.)	T _a	0.007							
Stator Winding Resistance (20°C)	ohm	0.055							
Rotor Winding Resistance (20°C)	ohm	0.94							
Exciter Stator Resistance (20°C)	ohm	20							
Exciter Rotor Phase resistance	ohm	0.08							
No load excitation current	i _o (A)	0.5	0.52	0.6	0.5	0.5	0.51	0.52	0.53
Full load excitation current	i _c (A)	1.8	1.8	1.9	1.8	1.8	1.8	1.9	1.9
Cooling air requirement	m ³ /sec	0.216m ³ /s 458cfm				0.281m ³ /s 595cfm			

Mechanical Characteristic

Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	355	342
Weight wound stator - kgs	128	128
Weight wound rotor - kgs	126.75	118.38
Inertia (J) [kgm ²]	0.7136kgm ²	0.6818kgm ²
Drive end bearing / Lubrication		BALL.6312-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6309-2RS(ISO)	BALL.6309-2RS(ISO)
Packing crate size (cm)	90X55X84	90X49X84


QYI224G

Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	75.0	75.0	75.0	67.4	85.0	85.0	85.0	75.0	87.5	87.5	87.5	76.9	90.8	90.8	90.8	80.1
	kW	60.0	60.0	60.0	53.9	68.0	68.0	68.0	60.0	70.0	70.0	70.0	61.5	72.6	72.6	72.6	64.1
	Efficiency (%)	90.3	90.6	90.7	91.0	89.8	90.2	90.4	90.9	89.7	90.1	90.3	90.8	89.6	89.9	90.1	90.7
	kW Input	66.4	66.2	66.2	59.2	75.7	75.4	75.2	66.0	78.0	77.7	77.5	67.7	81.1	80.8	80.6	70.7
60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	87.5	90.0	93.8	95.0	93.8	97.5	100.0	103.8	98.1	102.5	102.5	110.0	101.3	106.3	106.3	113.8
	kW	70.0	72.0	75.0	76.0	75.0	78.0	80.0	83.0	78.5	82.0	82.0	88.0	81.0	85.0	85.0	91.0
	Efficiency (%)	90.8	91.0	91.1	91.3	90.5	90.8	90.9	91.0	90.3	90.6	90.9	90.9	90.2	90.4	90.7	90.8
	kW Input	77.1	79.1	82.4	83.2	82.9	85.9	88.0	91.3	86.9	90.5	90.2	96.8	89.8	94.1	93.8	100.3

DIMENSIONS

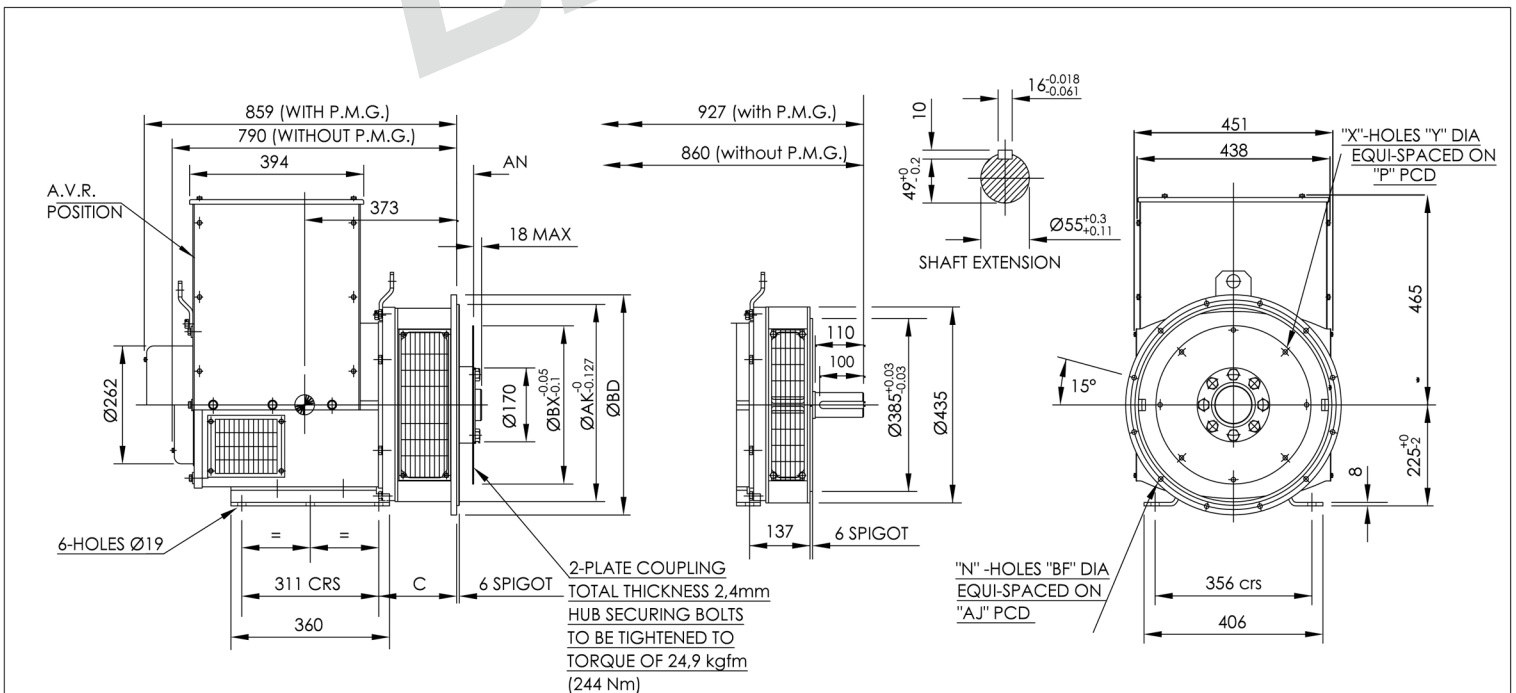





COUPLING DISC						FLANGE (mm)						
SAE	BX	P	X	Y	AH	SAE号	BD	AK	AJ	BF	n	C
14	466.72	438.15	8	13.5	25.4	SAE4	402	361.95	381	11	12	177
11.5	352.42	333.38	8	11	39.6	SAE3	451	409.58	428.62	11	12	177
10	314.32	295.28	8	11	53.8	SAE2	490	447.68	466.72	11	12	177
8	263.52	244.48	6	11	62	SAE1	553	511.18	530.22	12.7	12	191.3

				QYI 224G	1:1	QT002A032.6
						A2
						ISTALL 铨一
VER	MOD	DRW	Date			
Design		APP				
CHK		Date	2018.01	GB/T1804-m	mm	

50
Hz

QYI224G
Winding 311





THREE PHASE EFFICIENCY CURVES

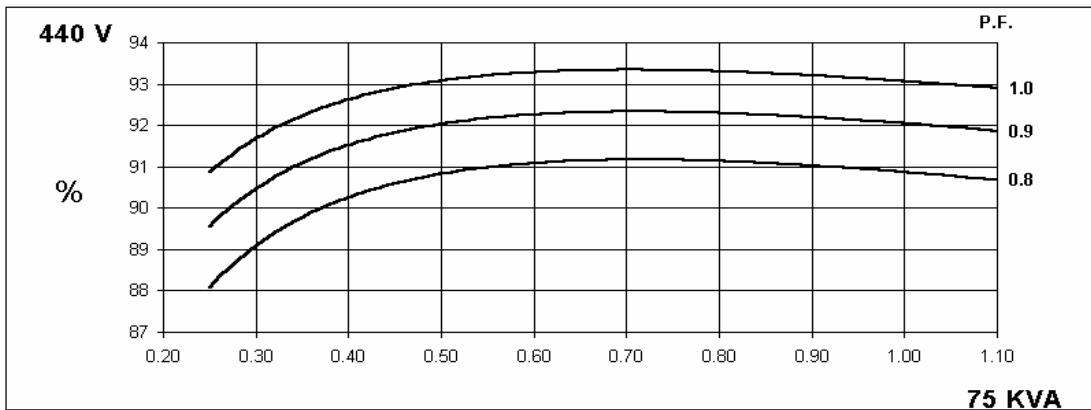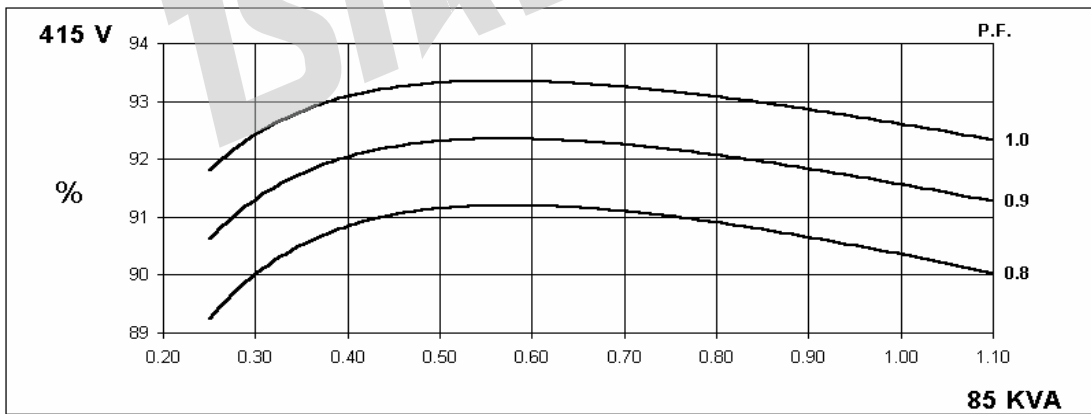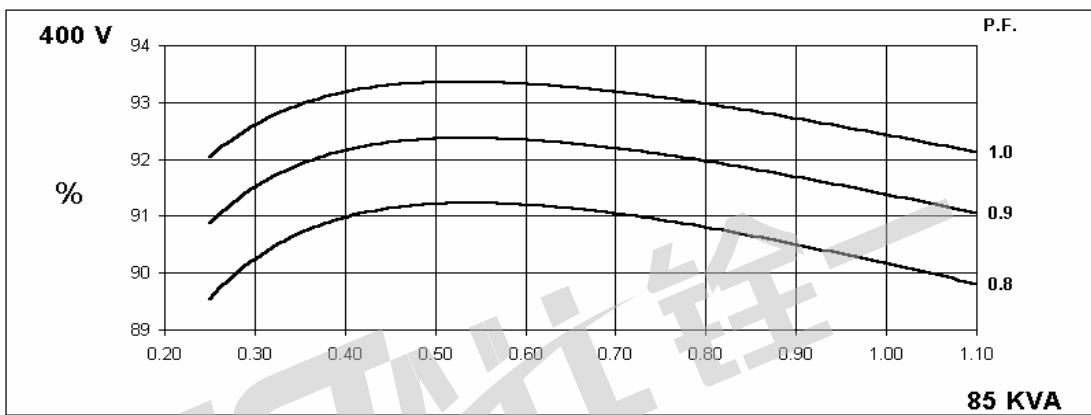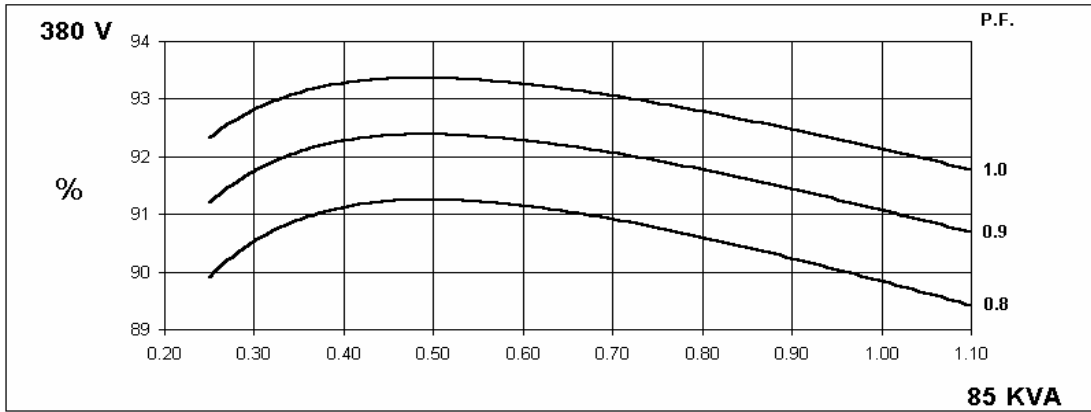

60
Hz

QYI224G
Winding 311


THREE PHASE EFFICIENCY CURVES

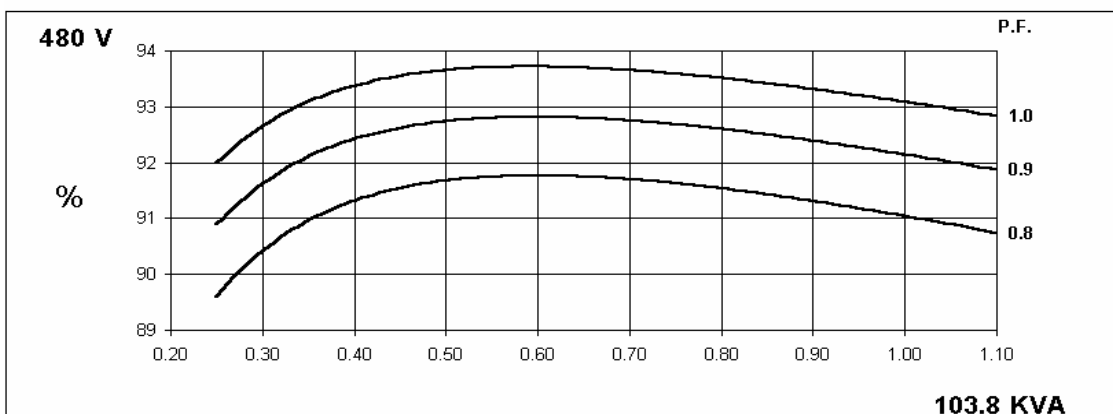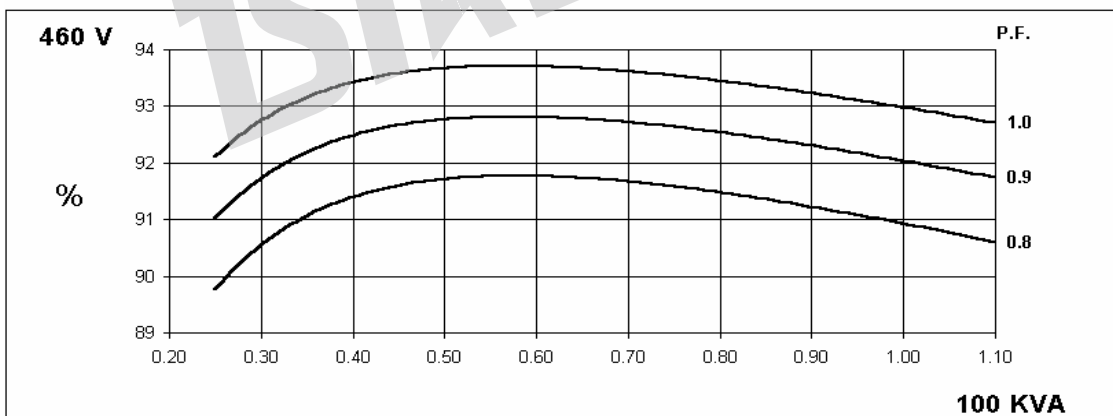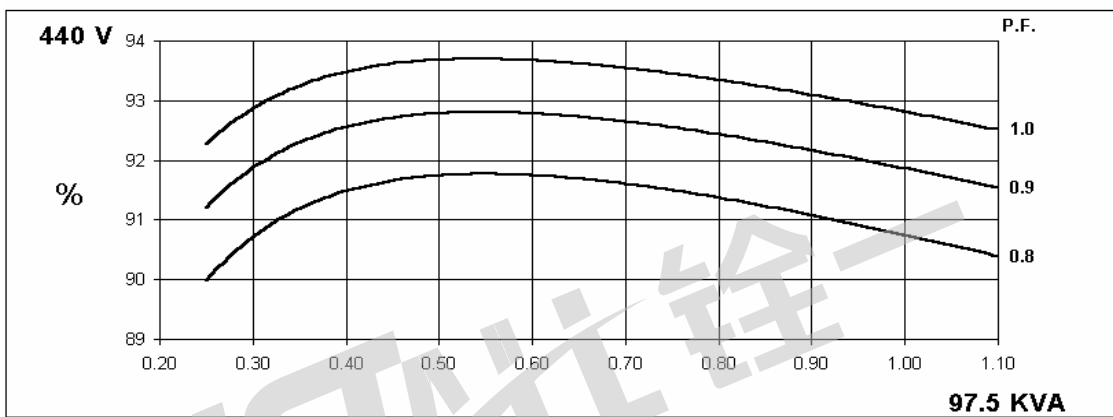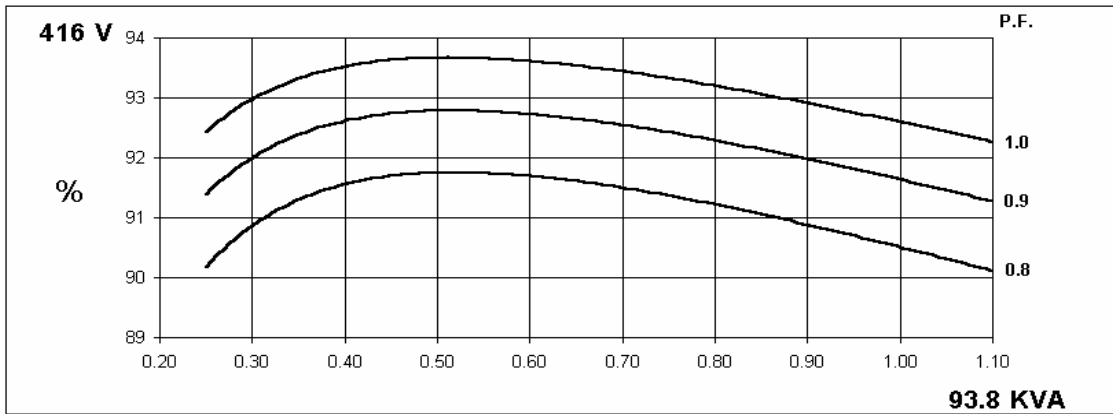

QYI224G


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

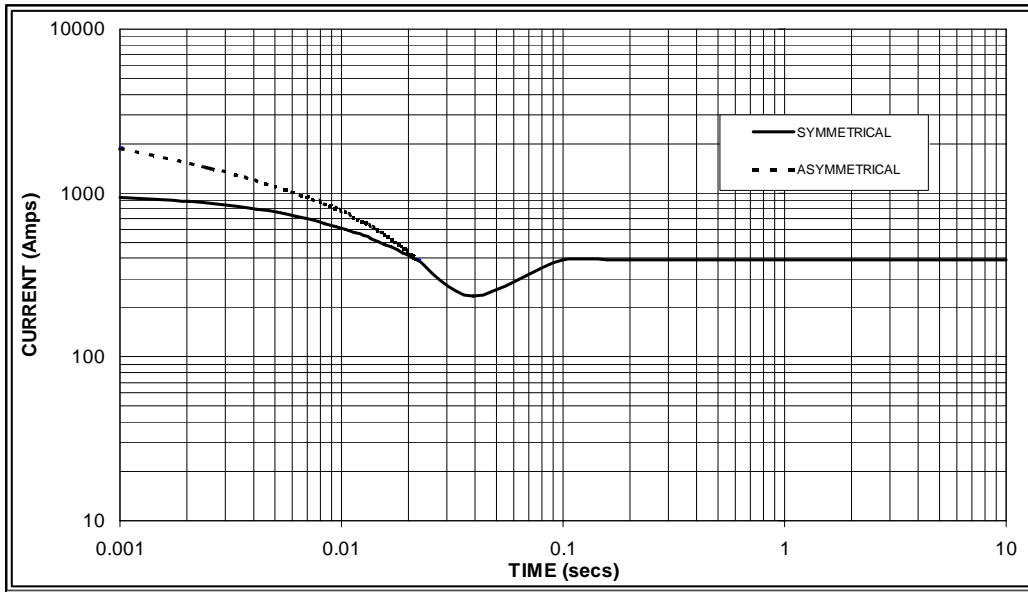

Sustained Short Circuit = 390 Amps

60
Hz

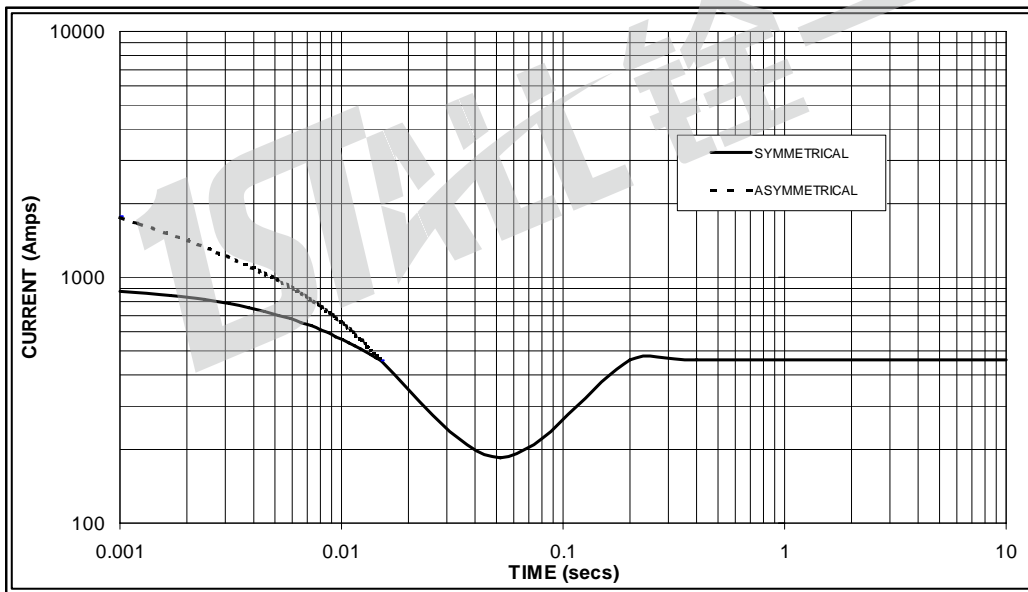

Sustained Short Circuit = 460 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.07	440v	X 1.06
415v	X 1.12	460v	X 1.12
440v	X 1.18	480v	X 1.17

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :


Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

QYI224G

Winding 311

INERTIA

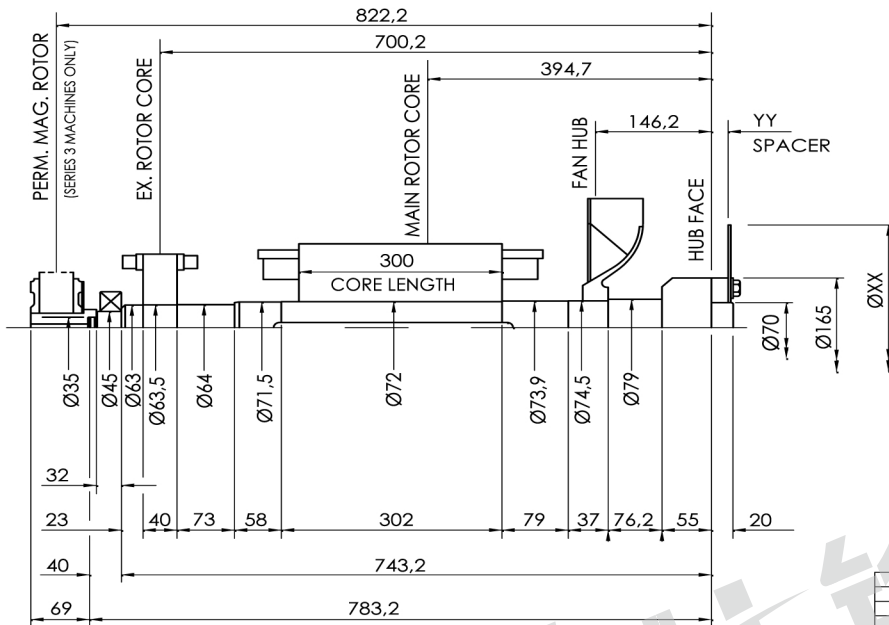

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	8,490	0,0508
MAIN ROTOR	79,080	0,5748
FAN	1,940	0,0271
SHAFT	24,692	0,0159
HUB	7,093	0,0300
TOTAL	121,295	0,6986
PERM. MAG.	5,450	0,0150
TOTAL	126,745	0,7136


COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
* 8	263	22,2	4,43	0,0087
* 10	314	14,3	3,70	0,0178
* 11 1/2	352	-	1,76	0,0282
! 11 1/2	352	14,3	4,07	0,0282
! 14	467	-	3,16	0,0878

VER	MOD	DRW	Date
Design		APP	
CHK		Date	2018.01

QYI 224G 1:1
INERTIA 0QY2010027



WWW.FIRSTALLPOWER.COM

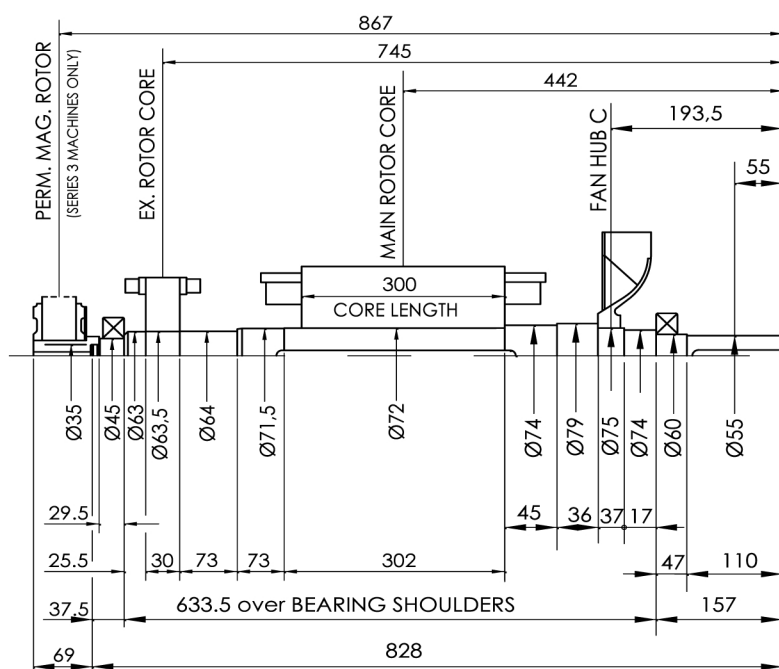

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	8.49	0.0508
MAIN ROTOR	79.08	0.5748
FAN	1,940	0,0271
SHAFT	23,416	0,0141
TOTAL	112,926	0,6668
PERM. MAG.	5,450	0,0150
TOTAL	118,375	0,6818

VER	MOD	DRW	Date
Design		APP	
CHK		Date	2018.01

QYI 224G 1:1
INERTIA 0QY2010028



WWW.FIRSTALLPOWER.COM