

# QYI224F

## THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

|  |  |                                  |                   |              |
|--|--|----------------------------------|-------------------|--------------|
| Ambient Temperature                            | 40 °C  | Method of Cooling                | Air cooling       |              |
| Temperature Rise                               | 125 °C   | Direction of Rotation            | Clockwise         |              |
| Insulation Class                               | H  | Maximum Over-speed               | 2250r/min         |              |
| Power Factor                                   | 0.8  | Degree of Protection / Enclosure | IP23              |              |
| Excitation                                     | Brushless  | Altitude                         | 1000m             |              |
| Winding Pitch                                  | 2/3  | Stator winding                   | DLL               |              |
| Pole   | 4  | Number of Terminal               | 12                |              |
| Duty   | S1- Continuous                                     | Rotor                            | With damping cage |              |
| Waveform                                       | TIF<50   |                                  | THF<2%            |              |
| Waveform distortion                            | BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N |                                  |                   |              |
| Radio interference                             | Noload<1.5%,Non-distorting balanced linear load<5% |                                  |                   |              |
| AVR MODEL AVR                                  | Standard   | Selection                        |                   | PMG          |
|  | SX460  | AS440                            | KRS440            | MX341B MX321 |
| Voltage Regulation - in steady state condition | ±1.0   | ±1.0                             | ±1.0              | ±0.5 ±0.5    |
| Short Circuit Current Capacity                 | Control does not sustain a short circuit current   |                                  |                   | 325A         |

### Electrical Characteristic

| Frequency  | Hz   | 50      |         |         |         | 60      |         |         |         |
|--|------|---------|---------|---------|---------|---------|---------|---------|---------|
|  |      |         |         |         |         |         |         |         |         |
| Voltage ( series star ) <b>Y</b>                 | V    | 380/220 | 400/231 | 415/240 | 440/254 | 416/240 | 440/254 | 460/266 | 480/277 |
| Voltage ( parallel star ) <b>YY</b>              | V    | 190/110 | 200/115 | 208/120 | 220/127 | 208/120 | 220/127 | 230/133 | 240/138 |
| Voltage ( series delta ) <b>Δ</b>                | V    | 220     | 230     | 240     | 254     | 240     | 254     | 266     | 277     |
| Rated power at Class H (125 °C) temperature rise | kVA  | 72.5    | 72.5    | 72.5    | 55      | 83.8    | 87.5    | 87.5    | 93.8    |
|  | kW   | 58.0    | 58.0    | 58.0    | 44.0    | 67.0    | 70.0    | 70.0    | 75.0    |
| Efficiency at Class H (P.F.=0.8)                 | 4/4% | 89.6    | 89.9    | 90.1    | 90.9    | 90      | 90.2    | 90.6    | 90.7    |
|  | 3/4% | 90.5    | 90.7    | 90.9    | 91      | 91      | 91.1    | 91.2    | 91.2    |
|  | 2/4% | 91      | 91      | 91      | 90.2    | 91.2    | 91.2    | 91.1    | 91.1    |
| Efficiency at Class H (P.F.=1.0)                 | 4/4% | 92      | 92.2    | 92.3    | 93.1    | 92.2    | 92.4    | 92.7    | 92.8    |
|  | 3/4% | 92.8    | 92.9    | 93      | 93.1    | 93      | 93.1    | 93.2    | 93.2    |
|  | 2/4% | 93.1    | 93.1    | 93.1    | 92.7    | 93.3    | 93.2    | 93.2    | 93.2    |

### Reactances (%) at Class H

|   |                  | 2.29   | 2.07   | 1.92   | 1.3    | 2.52   | 2.35   | 2.15   | 2.12   |
|---|------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Direct axis synchronous reactance unsaturated     | X <sub>d</sub>   |        |        |        |        |        |        |        |        |
| Direct axis transient reactance saturated         | X' <sub>d</sub>  | 0.18   | 0.16   | 0.15   | 0.1    | 0.21   | 0.2    | 0.18   | 0.18   |
| Direct axis subtransient reactance saturated      | X'' <sub>d</sub> | 0.12   | 0.11   | 0.1    | 0.07   | 0.14   | 0.13   | 0.12   | 0.12   |
| Quadrature axis synchronous reactance unsaturated | X <sub>q</sub>   | 1.05   | 0.95   | 0.88   | 0.59   | 1.16   | 1.08   | 0.99   | 0.98   |
| Quadrature axis subtransient reactance saturated  | X'' <sub>q</sub> | 0.16   | 0.14   | 0.13   | 0.09   | 0.13   | 0.12   | 0.11   | 0.11   |
| Leakage reactance                                 | X <sub>l</sub>   | 0.07   | 0.06   | 0.06   | 0.04   | 0.08   | 0.07   | 0.07   | 0.07   |
| Negative sequence reactance saturated             | X <sub>2</sub>   | 0.14   | 0.13   | 0.12   | 0.08   | 0.13   | 0.12   | 0.11   | 0.11   |
| Zero sequence reactance unsaturated               | X <sub>0</sub>   | 0.11   | 0.1    | 0.09   | 0.06   | 0.1    | 0.09   | 0.09   | 0.08   |
| Short-circuit ratio                               | K <sub>cc</sub>  | 0.4367 | 0.4831 | 0.5208 | 0.7692 | 0.3968 | 0.4255 | 0.4651 | 0.4717 |

|  |                     |                               |      |     |     |                               |      |      |      |
|--|---------------------|-------------------------------|------|-----|-----|-------------------------------|------|------|------|
| Short-circuit transient time constant (sec.) | T' <sub>d</sub>     | 0.03                          |      |     |     |                               |      |      |      |
| Subtransient time constant (sec.)            | T'' <sub>d</sub>    | 0.008                         |      |     |     |                               |      |      |      |
| Open circuit time constant (sec.)            | T' <sub>do</sub>    | 0.75                          |      |     |     |                               |      |      |      |
| Armature time constant (sec.)                | T <sub>a</sub>      | 0.0065                        |      |     |     |                               |      |      |      |
| Stator Winding Resistance (20°C)             | ohm                 | 0.065                         |      |     |     |                               |      |      |      |
| Rotor Winding Resistance (20°C)              | ohm                 | 0.83                          |      |     |     |                               |      |      |      |
| Exciter Stator Resistance (20°C)             | ohm                 | 20                            |      |     |     |                               |      |      |      |
| Exciter Rotor Phase resistance               | ohm                 | 0.08                          |      |     |     |                               |      |      |      |
| No load excitation current                   | i <sub>o</sub> (A)  | 0.5                           | 0.52 | 0.6 | 0.5 | 0.5                           | 0.51 | 0.52 | 0.53 |
| Full load excitation current                 | i <sub>c</sub> (A)  | 1.8                           | 1.8  | 1.9 | 1.8 | 1.8                           | 1.8  | 1.9  | 1.9  |
| Cooling air requirement                      | m <sup>3</sup> /sec | 0.216m <sup>3</sup> /s 458cfm |      |     |     | 0.281m <sup>3</sup> /s 595cfm |      |      |      |

### Mechanical Characteristic

| Configuration                       | Single Bearing         | Double Bearing         |
|-------------------------------------|------------------------|------------------------|
| Type of Construction                | B2-SAE                 | IM B34                 |
| Total Weight - kgs                  | 313                    | 305                    |
| Weight wound stator - kgs           | 110                    | 110                    |
| Weight wound rotor - kgs            | 110.69                 | 102.32                 |
| Inertia (J) [kgm <sup>2</sup> ]     | 0.6071kgm <sup>2</sup> | 0.5754kgm <sup>2</sup> |
| Drive end bearing / Lubrication     |                        | BALL.6312-2RS(ISO)     |
| Non-drive end bearing / Lubrication | BALL.6309-2RS(ISO)     | BALL.6309-2RS(ISO)     |
| Packing crate size (cm)             | 86X55X84               | 86X49X84               |

# QYI224F


## Winding 311 / 0.8 Power Factor

### RATINGS

| Class - Temp Rise | Cont. F - 105/40°C |      |      |      | Cont. H - 125/40°C |      |      |      | Standby - 150/40°C |      |      |      | Standby - 163/27°C |      |      |      |     |
|-------------------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|-----|
| <b>50 Hz</b>      | Series Star (V)    | 380  | 400  | 415  | 440                | 380  | 400  | 415  | 440                | 380  | 400  | 415  | 440                | 380  | 400  | 415  | 440 |
|                   | Parallel Star (V)  | 190  | 200  | 208  | 220                | 190  | 200  | 208  | 220                | 190  | 200  | 208  | 220                | 190  | 200  | 208  | 220 |
|                   | Series Delta (V)   | 220  | 230  | 240  | 254                | 220  | 230  | 240  | 254                | 220  | 230  | 240  | 254                | 220  | 230  | 240  | 254 |
| kVA               | 65.0               | 65.0 | 65.0 | 48.7 | 72.5               | 72.5 | 72.5 | 55.0 | 77.0               | 77.0 | 77.0 | 58.0 | 80.0               | 80.0 | 80.0 | 60.5 |     |
| kW                | 52.0               | 52.0 | 52.0 | 39.0 | 58.0               | 58.0 | 58.0 | 44.0 | 61.6               | 61.6 | 61.6 | 46.4 | 64.0               | 64.0 | 64.0 | 48.4 |     |
| Efficiency (%)    | 90.0               | 90.3 | 90.4 | 90.9 | 89.6               | 89.9 | 90.1 | 90.8 | 89.4               | 89.7 | 89.9 | 90.8 | 89.2               | 89.6 | 89.8 | 90.7 |     |
| kW Input          | 57.8               | 57.6 | 57.5 | 42.9 | 64.7               | 64.5 | 64.4 | 48.5 | 68.9               | 68.7 | 68.5 | 51.1 | 71.7               | 71.4 | 71.3 | 53.4 |     |

|                |                   |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |     |
|----------------|-------------------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|-----|
| <b>60 Hz</b>   | Series Star (V)   | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  | 416  | 440  | 460   | 480  | 416  | 440  | 460   | 480 |
|                | Parallel Star (V) | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  | 208  | 220  | 230   | 240  | 208  | 220  | 230   | 240 |
|                | Delta (V)         | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  | 240  | 254  | 266   | 277  | 240  | 254  | 266   | 277 |
| kVA            | 75.0              | 78.1 | 78.1 | 82.5 | 83.8 | 87.5 | 87.5 | 93.8 | 88.8 | 92.5 | 92.5 | 100.0 | 91.9 | 95.0 | 95.0 | 102.5 |     |
| kW             | 60.0              | 62.5 | 62.5 | 66.0 | 67.0 | 70.0 | 70.0 | 75.0 | 71.0 | 74.0 | 74.0 | 80.0  | 73.5 | 76.0 | 76.0 | 82.0  |     |
| Efficiency (%) | 90.5              | 90.7 | 90.9 | 91.0 | 90.0 | 90.3 | 90.6 | 90.6 | 89.8 | 90.1 | 90.4 | 90.4  | 89.6 | 89.9 | 90.3 | 90.3  |     |
| kW Input       | 66.3              | 68.9 | 68.7 | 72.5 | 74.5 | 77.5 | 77.3 | 82.8 | 79.1 | 82.1 | 81.9 | 88.5  | 82.1 | 84.5 | 84.2 | 90.8  |     |

### DIMENSIONS

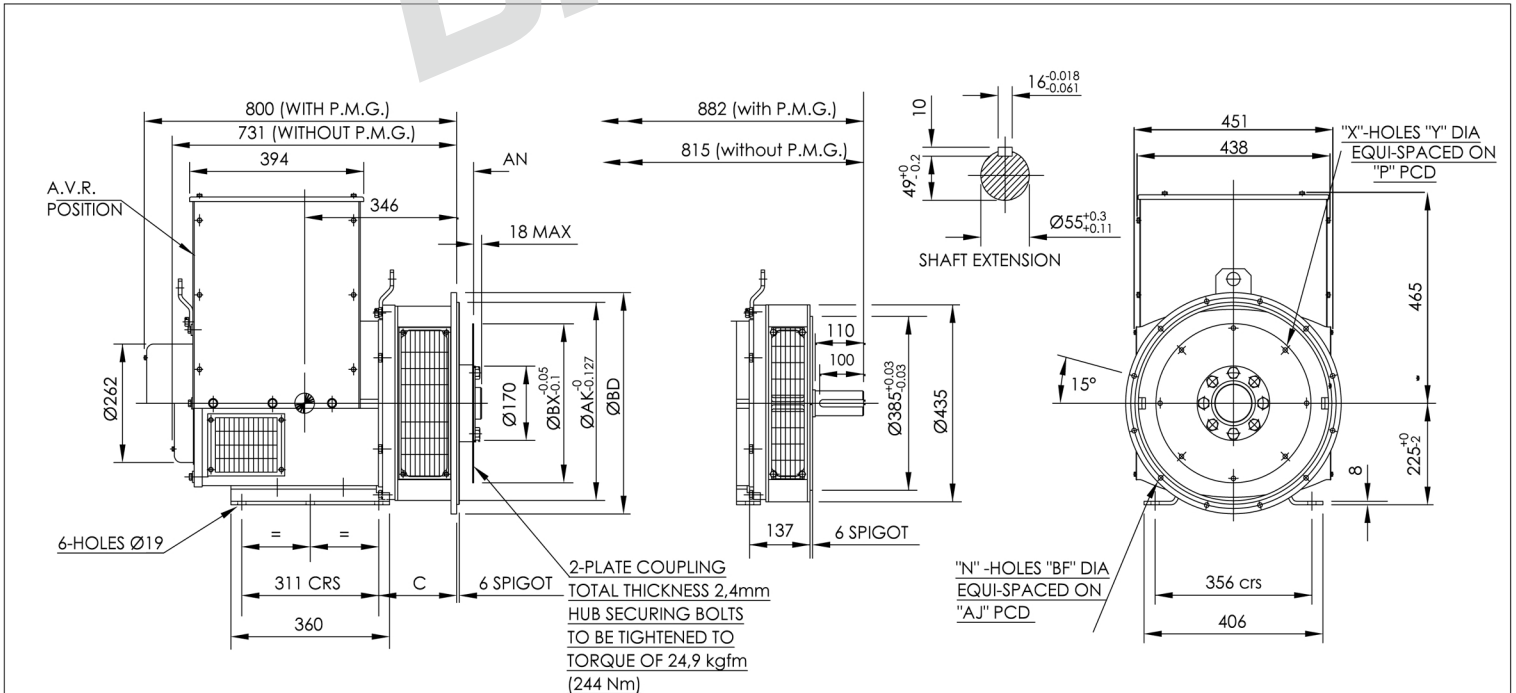





| COUPLING DISC |        |        |   |      | FLANGE (mm) |      |     |        |        |      |    |       |
|---------------|--------|--------|---|------|-------------|------|-----|--------|--------|------|----|-------|
| SAE           | BX     | P      | X | Y    | AH          | SAE号 | BD  | AK     | AJ     | BF   | n  | C     |
| 14            | 466.72 | 438.15 | 8 | 13.5 | 25.4        | SAE4 | 402 | 361.95 | 381    | 11   | 12 | 177   |
| 11.5          | 352.42 | 333.38 | 8 | 11   | 39.6        | SAE3 | 451 | 409.58 | 428.62 | 11   | 12 | 177   |
| 10            | 314.32 | 295.28 | 8 | 11   | 53.8        | SAE2 | 490 | 447.68 | 466.72 | 11   | 12 | 177   |
| 8             | 263.52 | 244.48 | 6 | 11   | 62          | SAE1 | 553 | 511.18 | 530.22 | 12.7 | 12 | 191.3 |

|        |     |      |         |            |     |             |
|--------|-----|------|---------|------------|-----|-------------|
|        |     |      |         | QYI 224F   | 1:1 | QT002A032.5 |
|        |     |      |         |            | A2  |             |
| VER    | MOD | DRW  | Date    |            |     |             |
| Design |     | APP  |         |            |     |             |
| CHK    |     | Date | 2018.01 | GB/T1804-m | mm  | ISTALL 铨    |

50  
Hz

QYI224F  
Winding 311





THREE PHASE EFFICIENCY CURVES

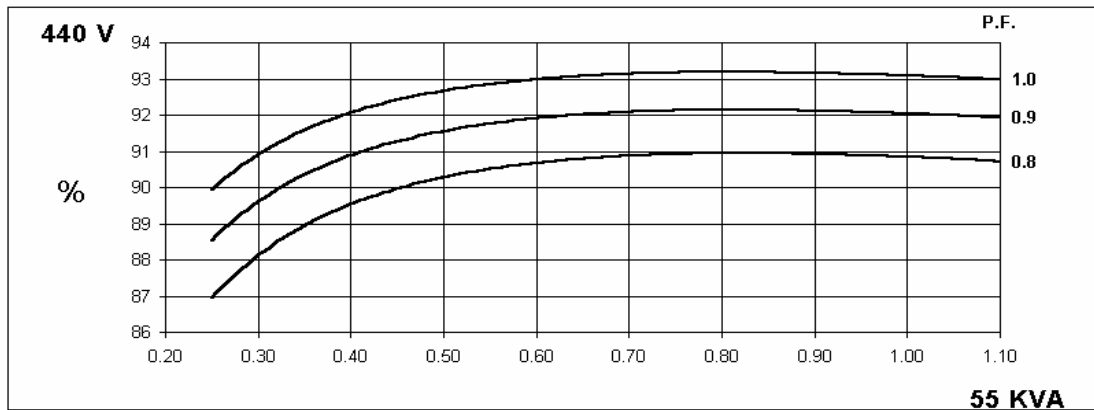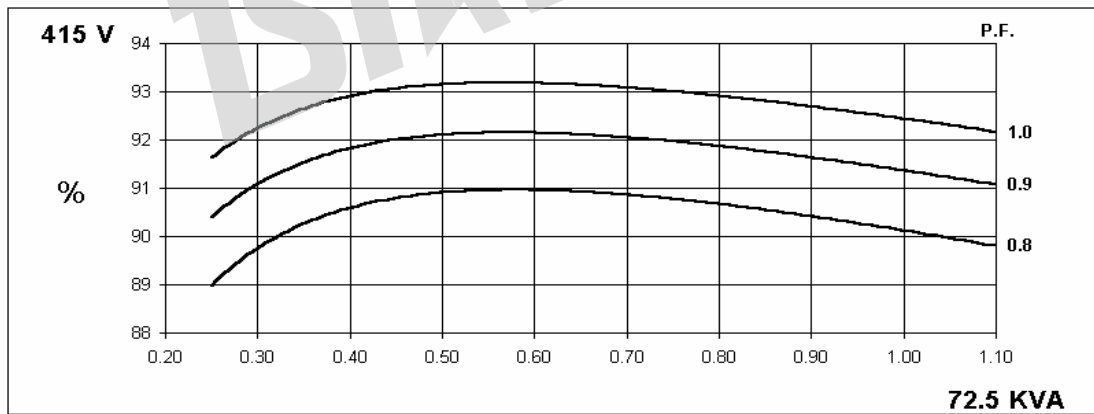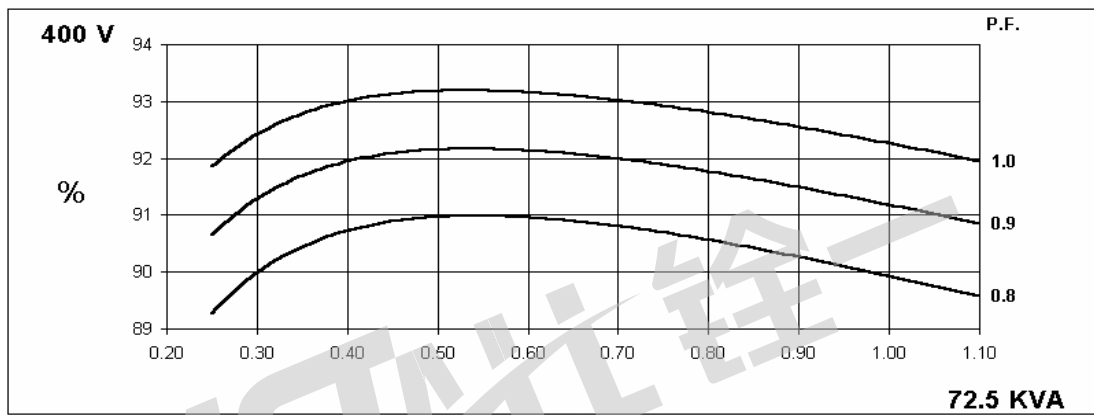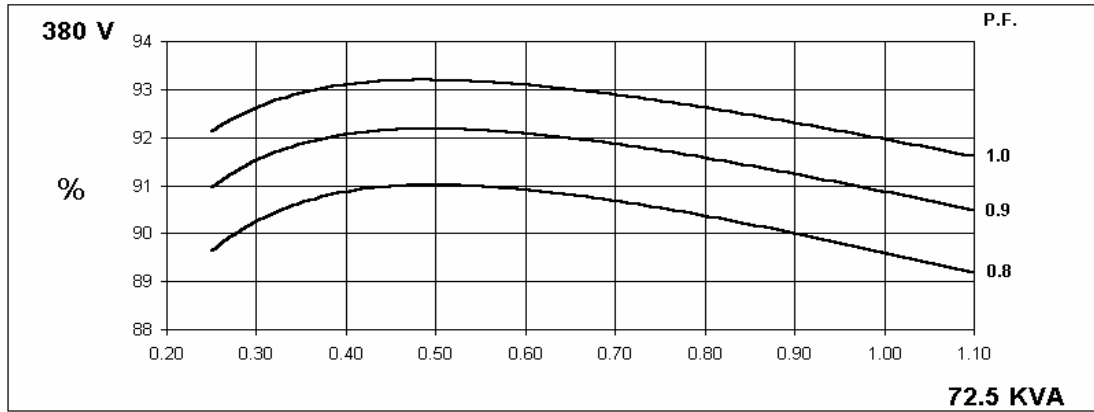

60  
Hz

QYI224F  
Winding 311


THREE PHASE EFFICIENCY CURVES

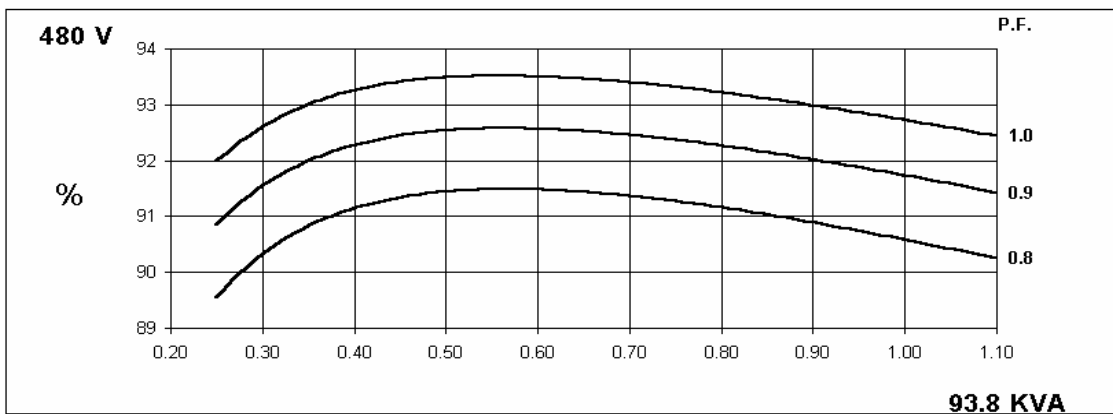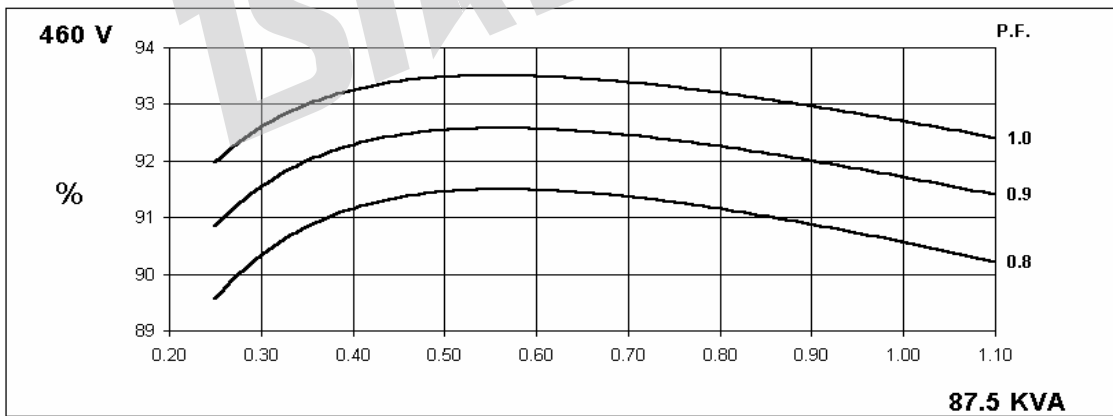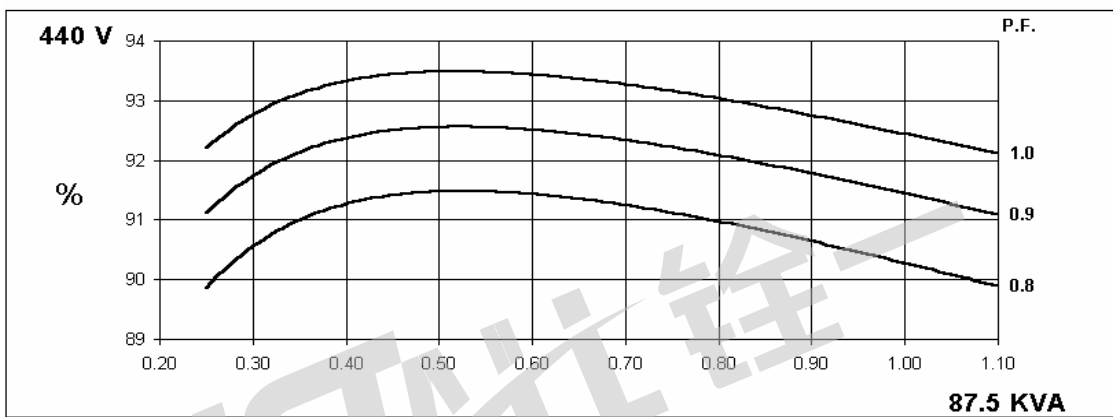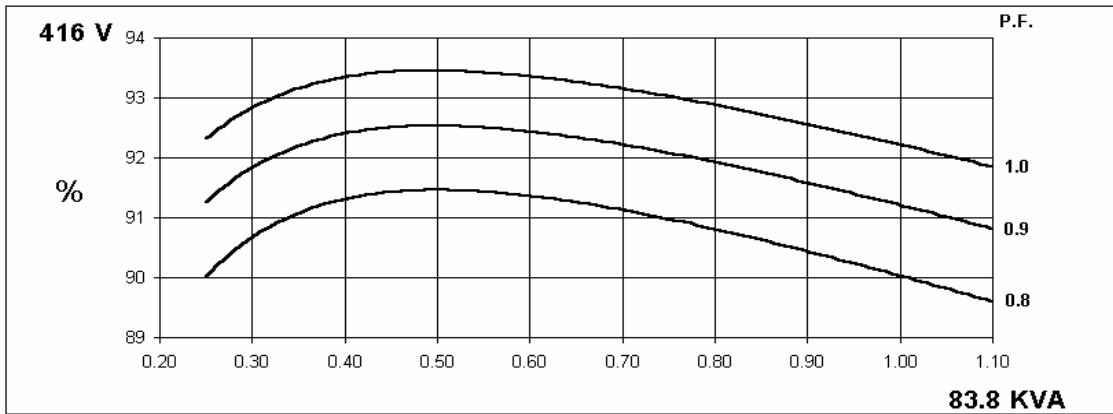

# QYI224F


## Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50  
Hz

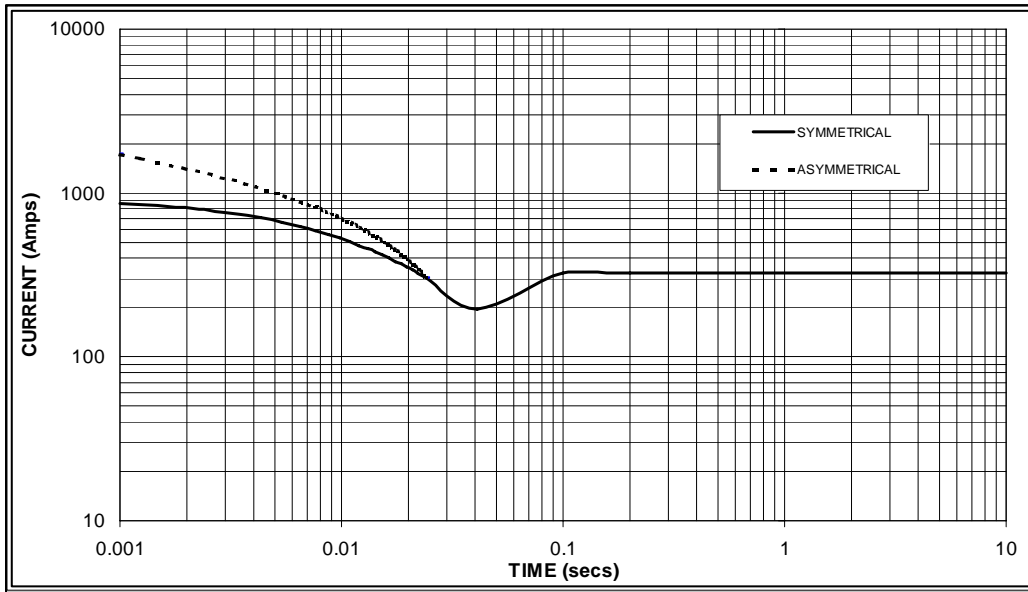

Sustained Short Circuit = 325 Amps

60  
Hz

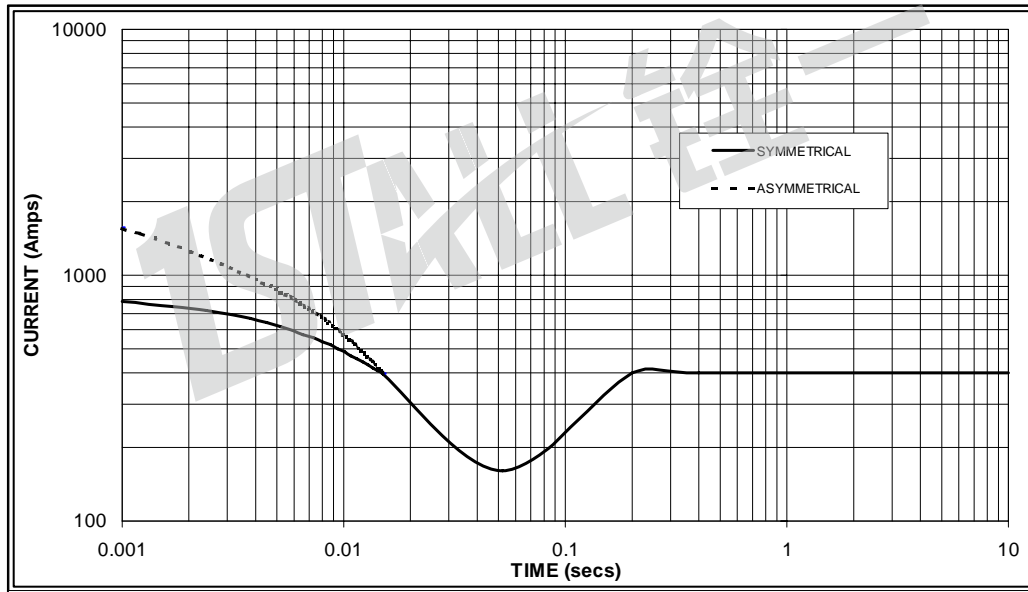

Sustained Short Circuit = 400 Amps

### Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

| 50Hz    |        | 60Hz    |        |
|---------|--------|---------|--------|
| Voltage | Factor | Voltage | Factor |
| 380v    | X 1.00 | 416v    | X 1.00 |
| 400v    | X 1.07 | 440v    | X 1.06 |
| 415v    | X 1.12 | 460v    | X 1.12 |
| 440v    | X 1.18 | 480v    | X 1.17 |

The sustained current value is constant irrespective of voltage level

### Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

|                         | 3-phase | 2-phase L-L | 1-phase L-N |
|-------------------------|---------|-------------|-------------|
| Instantaneous           | x 1.00  | x 0.87      | x 1.30      |
| Minimum                 | x 1.00  | x 1.80      | x 3.20      |
| Sustained               | x 1.00  | x 1.50      | x 2.50      |
| Max. sustained duration | 10 sec. | 5 sec.      | 2 sec.      |

All other times are unchanged

### Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :


Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

# QYI224F

## Winding 311

### INERTIA

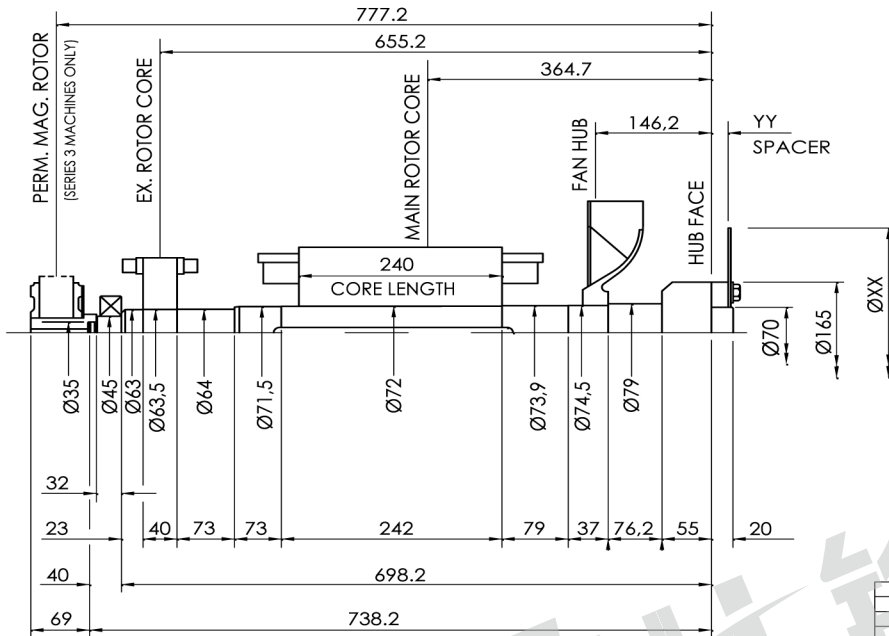

| COMPONENT  | Wt kg  | J kgm <sup>2</sup> |
|------------|--------|--------------------|
| EX. ROTOR  | 8.490  | 0,0508             |
| MAIN ROTOR | 64.47  | 0,4693             |
| FAN        | 1,940  | 0,0271             |
| SHAFT      | 23.247 | 0,0149             |
| HUB        | 7,093  | 0,0300             |
| TOTAL      | 105.24 | 0,5921             |
| PERM. MAG. | 5,450  | 0,0150             |
| TOTAL      | 110.69 | 0,6071             |


| COUPLING SAE No | COUPLING DIMEN's |      | COUPLING ASSEMBLY WEIGHT kg | COUPLING DISC J kgm <sup>2</sup> |
|-----------------|------------------|------|-----------------------------|----------------------------------|
|                 | XX               | YY   |                             |                                  |
| * 8             | 263              | 22,2 | 4,43                        | 0,0087                           |
| * 10            | 314              | 14,3 | 3,70                        | 0,0178                           |
| * 11 1/2        | 352              | -    | 1,76                        | 0,0282                           |
| ! 11 1/2        | 352              | 14,3 | 4,07                        | 0,0282                           |
| ! 14            | 467              | -    | 3,16                        | 0,0878                           |

| VER    | MOD | DRW  | Date    |
|--------|-----|------|---------|
| Design |     | APP  |         |
| CHK    |     | Date | 2018.01 |

QYI 224F 1:1  
INERTIA 0QY2010025



WWW.FIRSTALLPOWER.COM

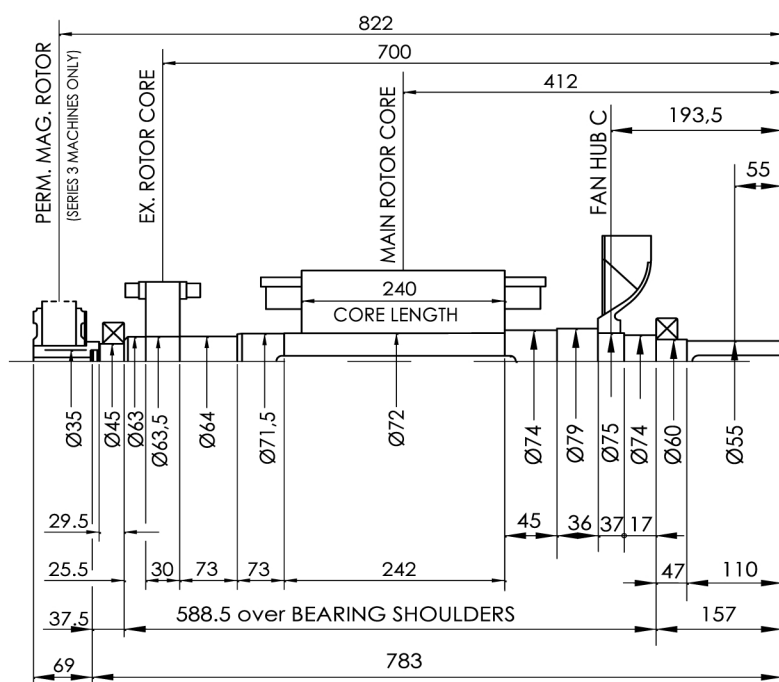

| COMPONENT  | Wt kg   | J kgm <sup>2</sup> |
|------------|---------|--------------------|
| EX. ROTOR  | 8.49    | 0,0508             |
| MAIN ROTOR | 64.47   | 0,4693             |
| FAN        | 1,940   | 0,0271             |
| SHAFT      | 21.971  | 0,0132             |
| TOTAL      | 96.871  | 0,5604             |
| PERM. MAG. | 5,450   | 0,0150             |
| TOTAL      | 102.321 | 0,5754             |

| VER    | MOD | DRW  | Date    |
|--------|-----|------|---------|
| Design |     | APP  |         |
| CHK    |     | Date | 2018.01 |

QYI 224F 1:1  
INERTIA 0QY2010026



WWW.FIRSTALLPOWER.COM