

QYI274F

THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling				Air cooling			
Temperature Rise	125 °C	Direction of Rotation				Clockwise			
Insulation Class	H	Maximum Over-speed				2250r/min			
Power Factor	0.8	Degree of Protection / Enclosure				IP23			
Excitation	Brushless	Altitude				1000m			
Winding Pitch	2/3	Stator winding				DLL			
Pole	4	Number of Terminal				12			
Duty	S1- Continuous	Rotor				With damping cage			
Waveform	TIF<50				THF<2%				
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N								
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%								
AVR MODEL AVR	Standard	Selection			PMG				
	SX460	AS440	KRS440	MX341B	MX321				
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	±1.0	±0.5	±0.5			
Short Circuit Current Capacity	Control does not sustain a short circuit current				750A				
Electrical Characteristic									
Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	160	160	160	N/A	181.3	190	190	206.3
	kW	128.0	128.0	128.0	N/A	145.0	152.0	152.0	165.0
Efficiency at Class H (P.F.=0.8)	4/4%	92	92.2	92.5	N/A	92.1	92.3	92.7	92.7
	3/4%	92.8	93	93.1	N/A	92.9	93	93.2	93.2
	2/4%	93.2	93.2	93.2	N/A	93.2	93.2	93.2	93.2
Efficiency at Class H (P.F.=1.0)	4/4%	93.7	94	94.1	N/A	93.8	94	94.2	94.2
	3/4%	94.4	94.6	94.7	N/A	94.4	94.6	94.7	94.8
	2/4%	94.8	94.8	94.8	N/A	94.8	94.8	94.8	94.9
Reactances (%) at Class H									
Direct axis synchronous reactance unsaturated	X _d	2.24	2.02	1.88	N/A	2.53	2.37	2.17	2.16
Direct axis transient reactance saturated	X' _d	0.19	0.17	0.16	N/A	0.21	0.2	0.18	0.18
Direct axis subtransient reactance saturated	X'' _d	0.13	0.12	0.11	N/A	0.14	0.13	0.12	0.12
Quadrature axis synchronous reactance unsaturated	X _q	1.38	1.25	1.16	N/A	1.53	1.43	1.31	1.31
Quadrature axis subtransient reactance saturated	X'' _q	0.17	0.15	0.14	N/A	0.2	0.19	0.17	0.17
Leakage reactance	X _l	0.07	0.06	0.06	N/A	0.09	0.08	0.08	0.08
Negative sequence reactance saturated	X ₂	0.14	0.13	0.12	N/A	0.16	0.15	0.14	0.14
Zero sequence reactance unsaturated	X ₀	0.08	0.08	0.07	N/A	0.1	0.09	0.09	0.09
Short-circuit ratio	K _{cc}	0.4464	0.4950	0.5319	N/A	0.3953	0.4219	0.4608	0.4630
Short-circuit transient time constant (sec.)	T' _d	0.035							
Subtransient time constant (sec.)	T'' _d	0.011							
Open circuit time constant (sec.)	T' _{do}	0.9							
Armature time constant (sec.)	T _a	0.009							
Stator Winding Resistance (20°C)	ohm	0.024							
Rotor Winding Resistance (20°C)	ohm	1.6							
Exciter Stator Resistance (20°C)	ohm	20							
Exciter Rotor Phase resistance	ohm	0.091							
No load excitation current	i _o (A)	0.5	0.52	0.6	0.5	0.5	0.51	0.52	0.53
Full load excitation current	i _c (A)	1.8	1.8	1.9	1.8	1.8	1.8	1.9	1.9
Cooling air requirement	m ³ /sec	0.514m3/s 1090cfm				0.617m3/s 1308cfm			
Mechanical Characteristic									
Configuration	Single Bearing				Double Bearing				
Type of Construction	B2-SAE				IM B34				
Total Weight - kgs	513				499				
Weight wound stator - kgs	200				200				
Weight wound rotor - kgs	187				177				
Inertia (J) [kgm ²]	1.555kgm ²				1.5044kgm ²				
Drive end bearing / Lubrication					BALL.6315-2RS(ISO)				
Non-drive end bearing / Lubrication	BALL.6310-2RS(ISO)				BALL.6310-2RS(ISO)				
Packing crate size (cm)	98X63X94				104X63X94				

QYI274F


Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	145.0	145.0	145.0	N/A	160.0	160.0	160.0	N/A	170.0	170.0	170.0	N/A	175.0	175.0	175.0	N/A
	kW	116.0	116.0	116.0	N/A	128.0	128.0	128.0	N/A	136.0	136.0	136.0	N/A	140.0	140.0	140.0	N/A
	Efficiency (%)	92.3	92.6	92.8	N/A	92.0	92.3	92.5	N/A	91.7	92.1	92.3	N/A	91.6	92.0	92.2	N/A
	kW Input	125.7	125.3	125.0	N/A	139.1	138.7	138.4	N/A	148.3	147.7	147.3	N/A	152.8	152.2	151.8	N/A

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	162.5	172.5	172.5	187.5	181.3	190.0	190.0	206.3	187.5	200.0	200.0	212.5	192.5	206.3	206.3	218.8
	kW	130.0	138.0	138.0	150.0	145.0	152.0	152.0	165.0	150.0	160.0	160.0	170.0	154.0	165.0	165.0	175.0
	Efficiency (%)	92.5	92.7	92.9	92.9	92.1	92.4	92.7	92.7	92.0	92.2	92.5	92.6	91.9	92.1	92.4	92.5
	kW Input	140.5	148.9	148.5	161.5	157.5	164.5	164.0	178.0	163.0	173.5	173.0	183.6	167.6	179.2	178.6	189.2

DIMENSIONS

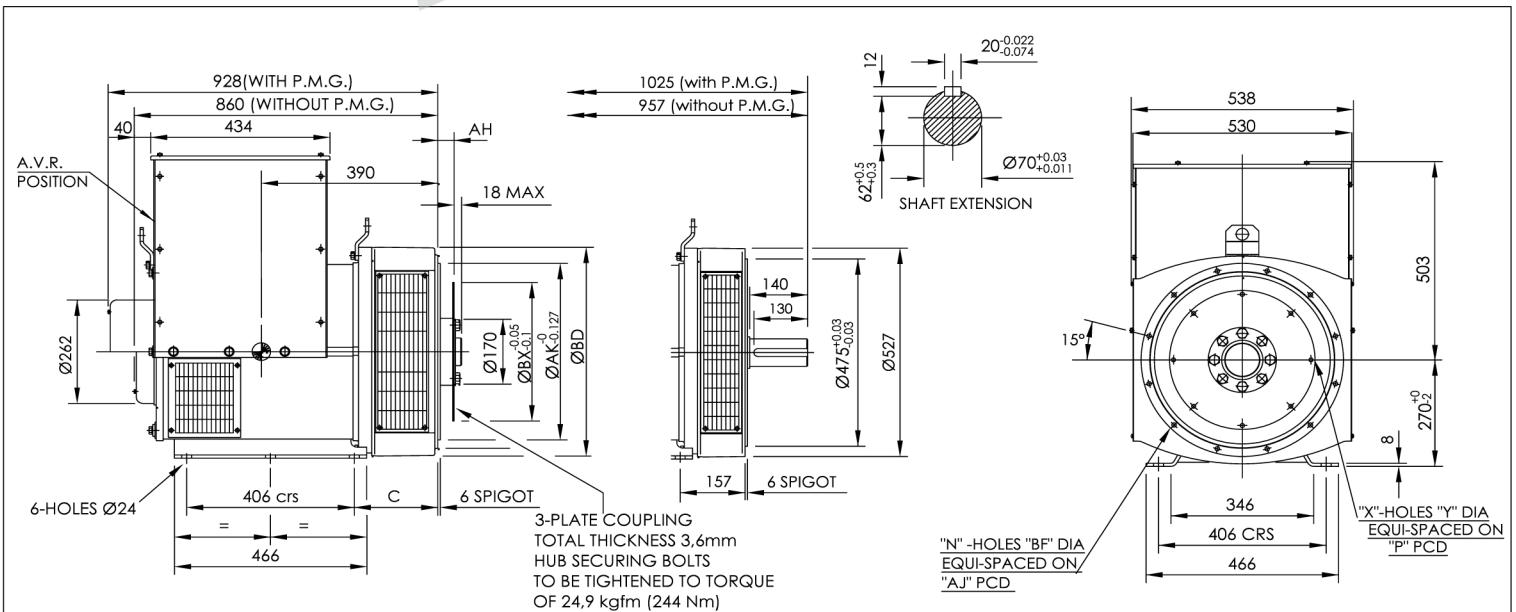

COUPLING DISC					
SAE	BX	P	X	Y	AH
14	466.72	438.15	8	13.5	25.4
11.5	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8




FLANGE (mm)						
SAE号	BD	AK	AJ	BF	n	C
SAE3	451	409.58	428.62	11	12	202
SAE2	490	447.68	466.72	11	12	202
SAE1	553	511.17	530.22	12.7	12	216.3

QYI 274F				1:1	QT002Z033.4
SAE:				A2	
VER	MOD	DRW	Date		
Design	APP	APP	Date		
CHK	Date	2018.01	GB/T1804-m		

50
Hz

QY1274F
Winding 311





THREE PHASE EFFICIENCY CURVES

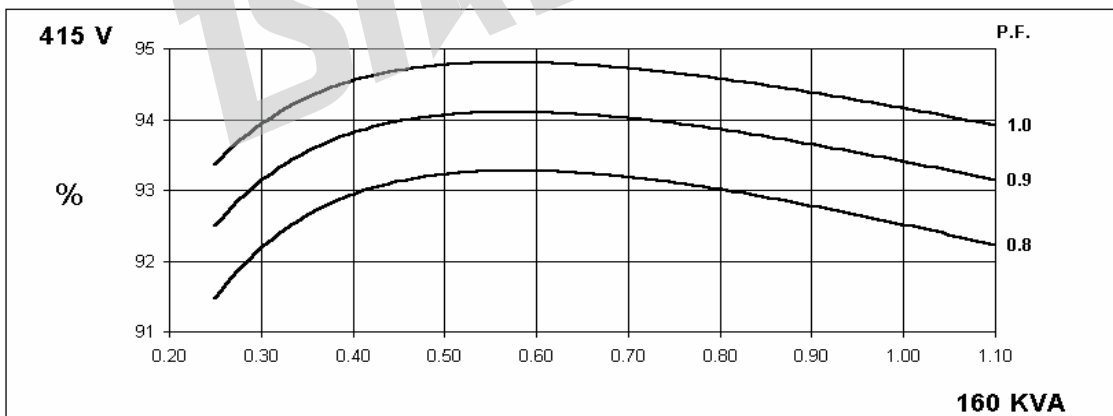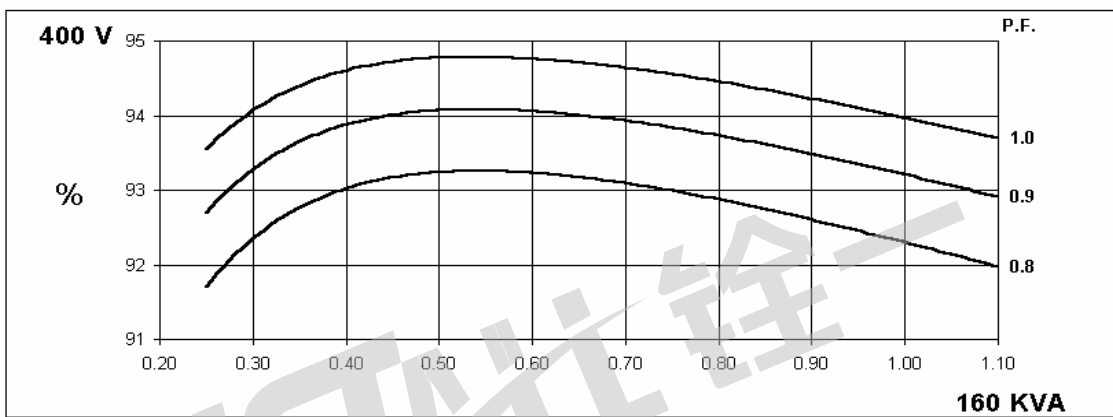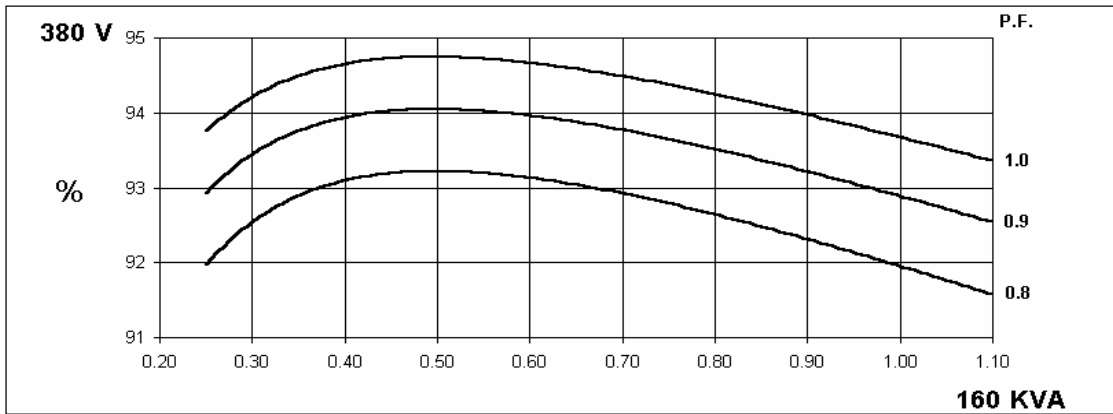

60
Hz

QY1274F
Winding 311


THREE PHASE EFFICIENCY CURVES

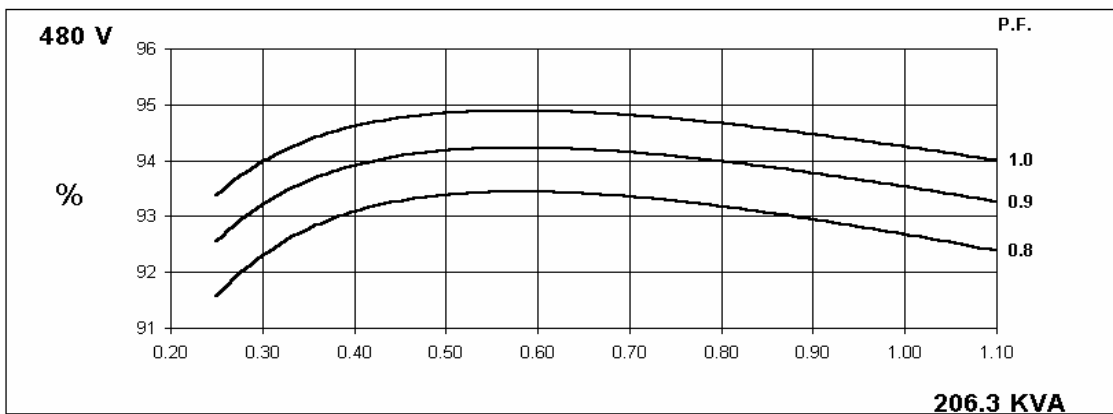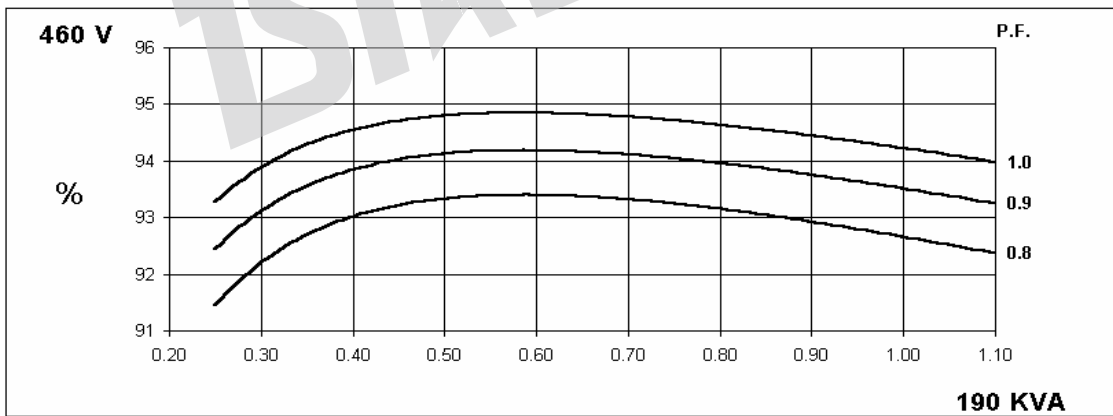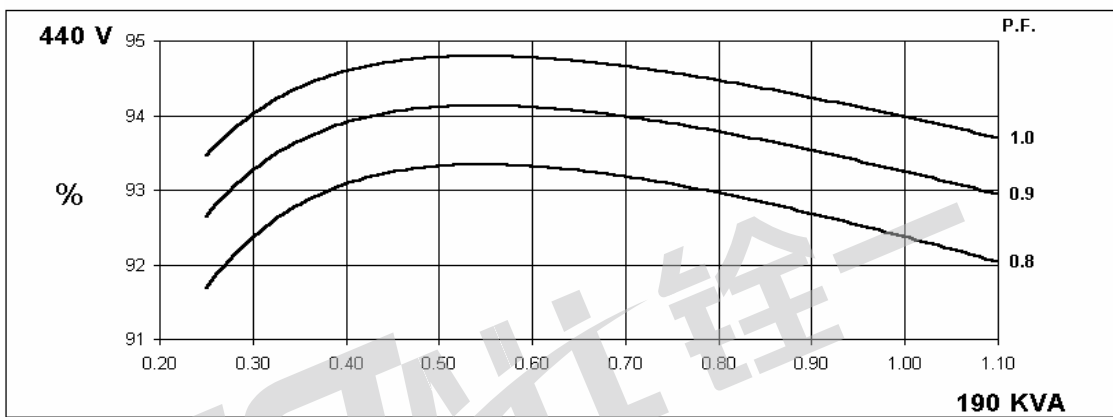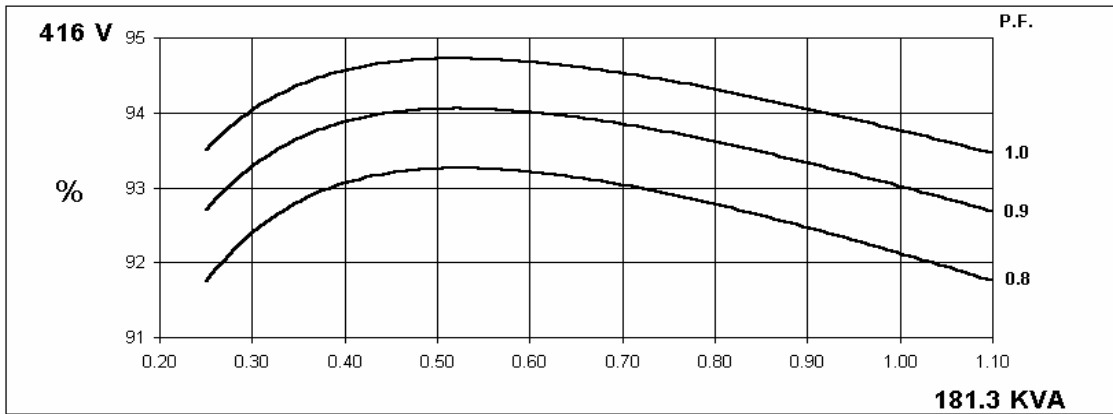

QYI274F


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

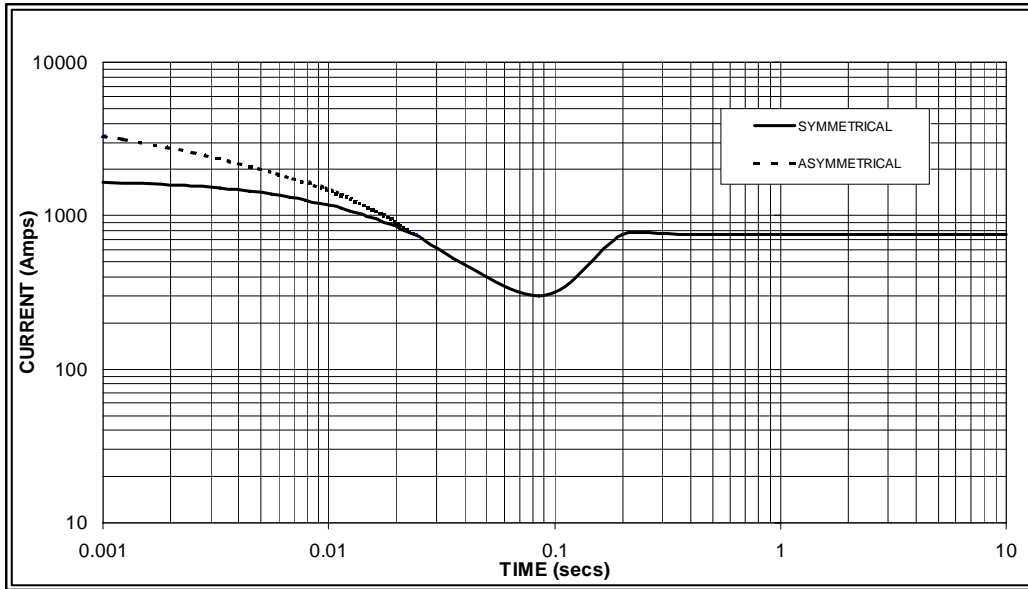

Sustained Short Circuit = 750 Amps

60
Hz

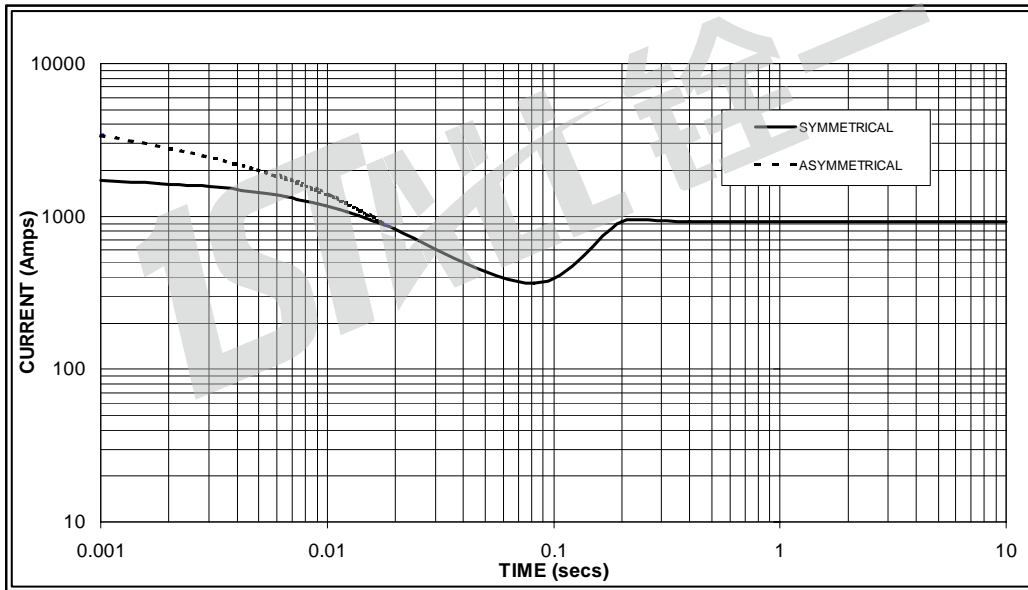

Sustained Short Circuit = 920 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.07	440v	X 1.06
415v	X 1.12	460v	X 1.12
		480v	X 1.17

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :


Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

QYI274F

Winding 311

INERTIA

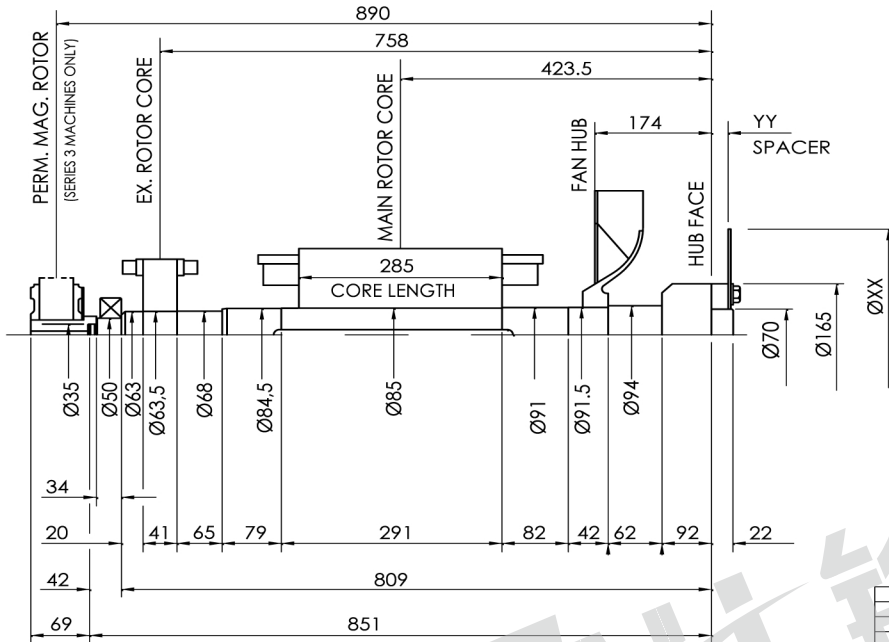


COMPONENT	Wt kg	J kgm ²
EX. ROTOR	12.28	0.0726
MAIN ROTOR	120.95	1.3159
FAN	3.389	0.0709
SHAFT	35.726	0.0315
HUB	10.878	0.0491
TOTAL	183.223	1.54
PERM. MAG.	5,450	0,0150
TOTAL	188.673	1.555

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
* 10	314	14,3	5.55	0,0266
* 11½	352	-	2.64	0,0423
! 11½	352	14,3	4,95	0,0423
! 14	467	-	4.74	0,1317

QYI 274F				1:1	0QY201035
INERTIA				mm	
VER	MOD	DRW	Date		
Design		APP			
CHK		Date	2018.01		

WWW.FIRSTALLPOWER.COM

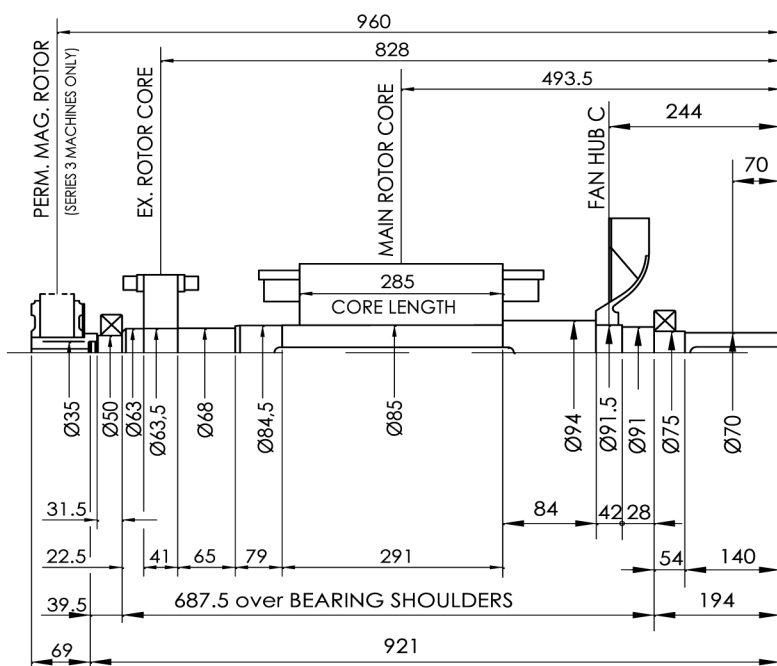

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	12.28	0.0726
MAIN ROTOR	120.95	1.3159
FAN	3.389	0.0709
SHAFT	35.642	0.03
TOTAL	172.261	1.4894
PERM. MAG.	5,450	0.0150
TOTAL	177.711	1.5044

QYI 274F				1:1	0QY201036
INERTIA				mm	
VER	MOD	DRW	Date		
Design		APP			
CHK		Date	2018.01		

WWW.FIRSTALLPOWER.COM