

QYI274H

THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling	Air cooling		
Temperature Rise	125 °C	Direction of Rotation	Clockwise		
Insulation Class	H	Maximum Over-speed	2250r/min		
Power Factor	0.8	Degree of Protection / Enclosure	IP23		
Excitation	Brushless	Altitude	1000m		
Winding Pitch	2/3	Stator winding	DLL		
Pole	4	Number of Terminal	12		
Duty	S1- Continuous	Rotor	With damping cage		
Waveform	TIF<50			THF<2%	
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N				
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%				
AVR MODEL AVR	Standard	Selection		PMG	
	SX460	AS440	KRS440	MX341B	MX321
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	±0.5	±0.5
Short Circuit Current Capacity	Control does not sustain a short circuit current			1000A	

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	200	200	200	N/A	237.5	245	245	255
	kW	160.0	160.0	160.0	N/A	190.0	196.0	196.0	204.0
Efficiency at Class H (P.F.=0.8)	4/4%	93	93.2	93.3	N/A	93	93.2	93.4	93.6
	3/4%	93.7	93.8	93.9	N/A	93.7	93.8	94	94
	2/4%	93.9	93.9	93.9	N/A	93.9	94	94	94
Efficiency at Class H (P.F.=1.0)	4/4%	94.6	94.8	94.9	N/A	94.5	94.7	94.9	95
	3/4%	95.1	95.1	95.2	N/A	95	95.2	95.2	95.2
	2/4%	95.2	95.2	95.2	N/A	95.2	95.3	95.2	95.2

Reactances (%) at Class H

Direct axis synchronous reactance unsaturated	X _d	2.11	1.91	1.77	N/A	2.5	2.31	2.11	2.02
Direct axis transient reactance saturated	X' _d	0.18	0.16	0.15	N/A	0.21	0.19	0.18	0.17
Direct axis subtransient reactance saturated	X'' _d	0.12	0.11	0.1	N/A	0.14	0.13	0.12	0.11
Quadrature axis synchronous reactance unsaturated	X _q	1.28	1.15	1.07	N/A	1.53	1.41	1.29	1.23
Quadrature axis subtransient reactance saturated	X'' _q	0.17	0.15	0.14	N/A	0.2	0.18	0.17	0.16
Leakage reactance	X _l	0.08	0.08	0.07	N/A	0.1	0.09	0.08	0.08
Negative sequence reactance saturated	X ₂	0.13	0.12	0.11	N/A	0.16	0.15	0.13	0.13
Zero sequence reactance unsaturated	X ₀	0.08	0.08	0.07	N/A	0.1	0.09	0.08	0.08
Short-circuit ratio	K _{cc}	0.4739	0.5236	0.5650	N/A	0.4000	0.4329	0.4739	0.4950

Short-circuit transient time constant (sec.)	T' _d	0.042							
Subtransient time constant (sec.)	T'' _d	0.012							
Open circuit time constant (sec.)	T' _{do}	1.1							
Armature time constant (sec.)	T _a	0.012							
Stator Winding Resistance (20°C)	ohm	0.0153							
Rotor Winding Resistance (20°C)	ohm	1.92							
Exciter Stator Resistance (20°C)	ohm	20							
Exciter Rotor Phase resistance	ohm	0.091							
No load excitation current	i _o (A)	0.5	0.52	0.6	0.5	0.5	0.51	0.52	0.53
Full load excitation current	i _c (A)	1.8	1.8	1.9	1.8	1.8	1.8	1.9	1.9
Cooling air requirement	m ³ /sec	0.514m ³ /s 1090cfm				0.617m ³ /s 1308cfm			

Mechanical Characteristic




Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	615	605
Weight wound stator - kgs	251	251
Weight wound rotor - kgs	226	216
Inertia (J) [kgm ²]	1.9349kgm ²	1.8843kgm ²
Drive end bearing / Lubrication		BALL.6315-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6310-2RS(ISO)	BALL.6310-2RS(ISO)
Packing crate size (cm)	108X63X94	115X63X94

50
Hz

QYI274H

Winding 311





THREE PHASE EFFICIENCY CURVES

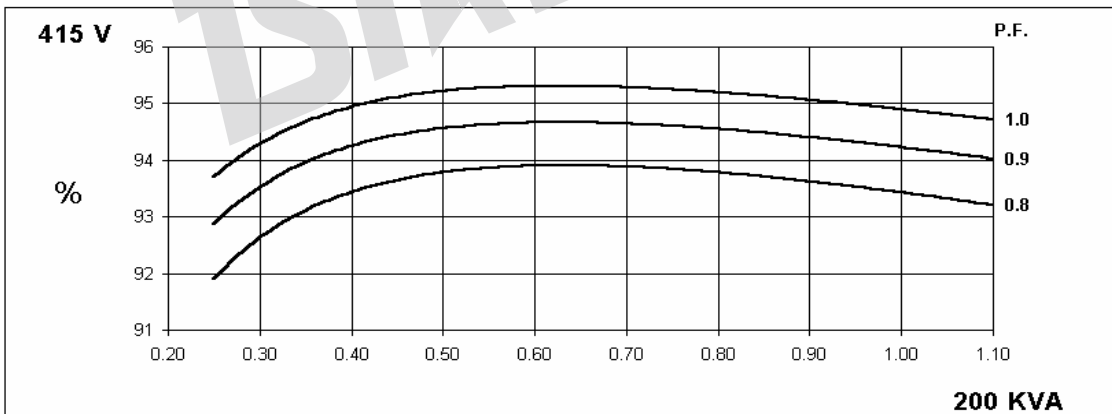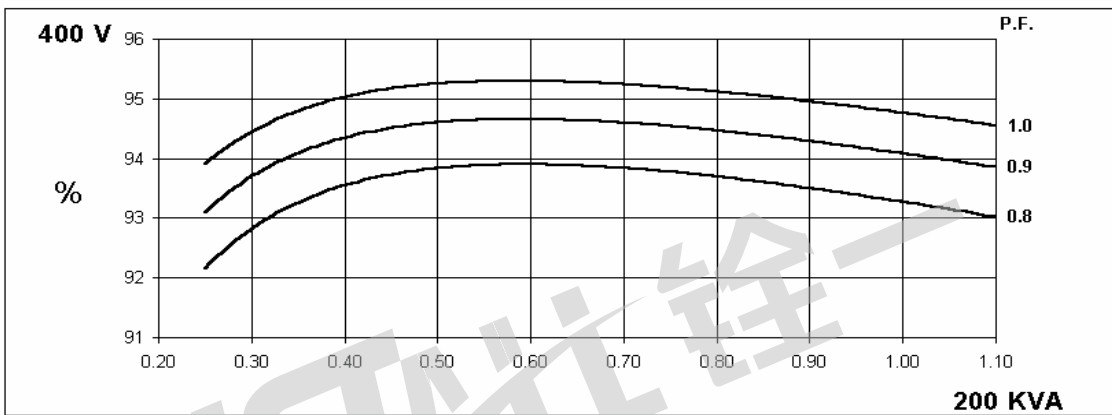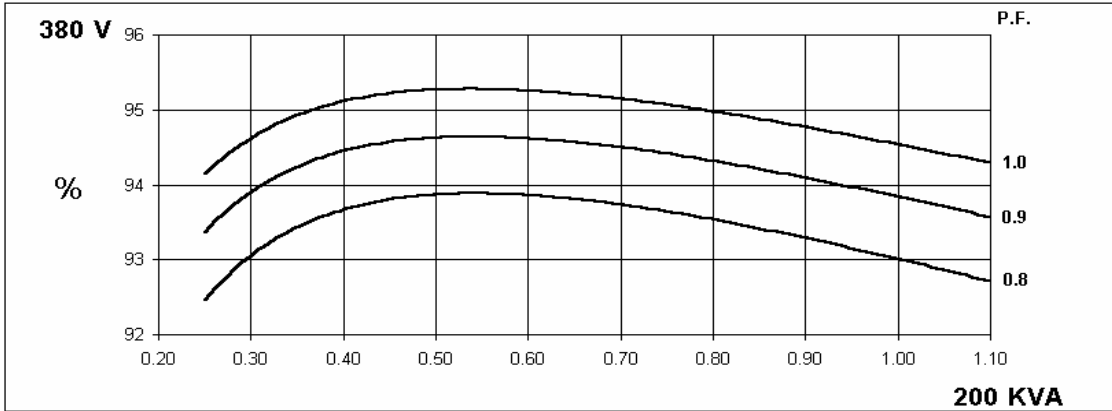

60
Hz

UCI274H
Winding 311


THREE PHASE EFFICIENCY CURVES

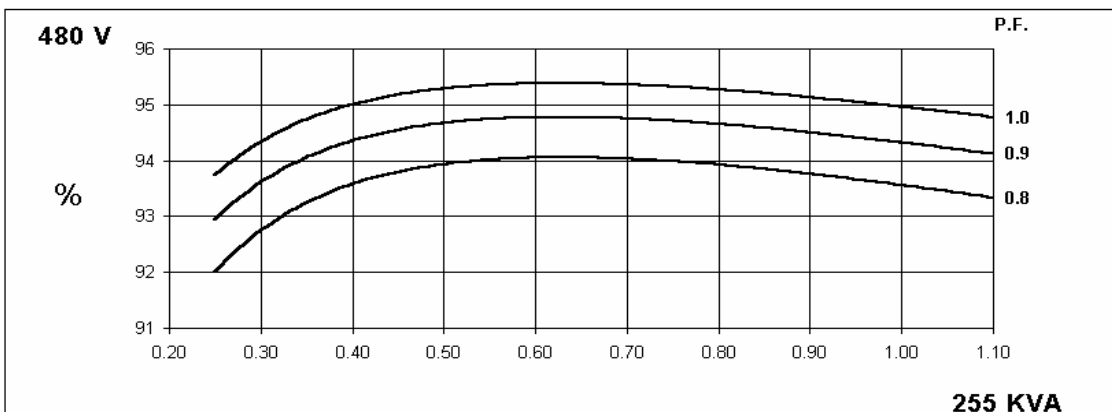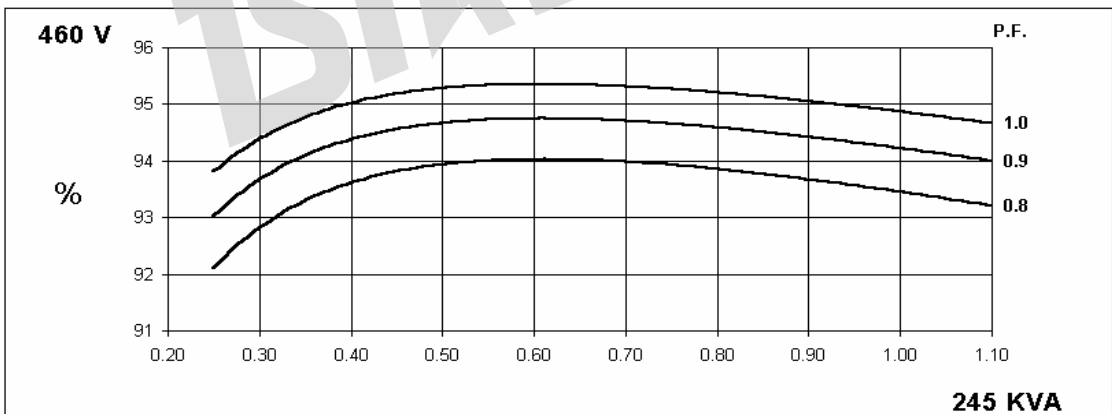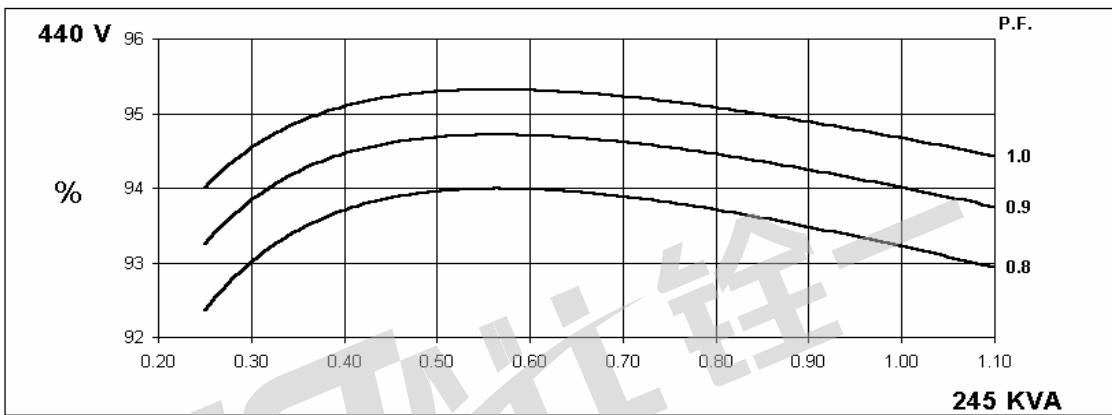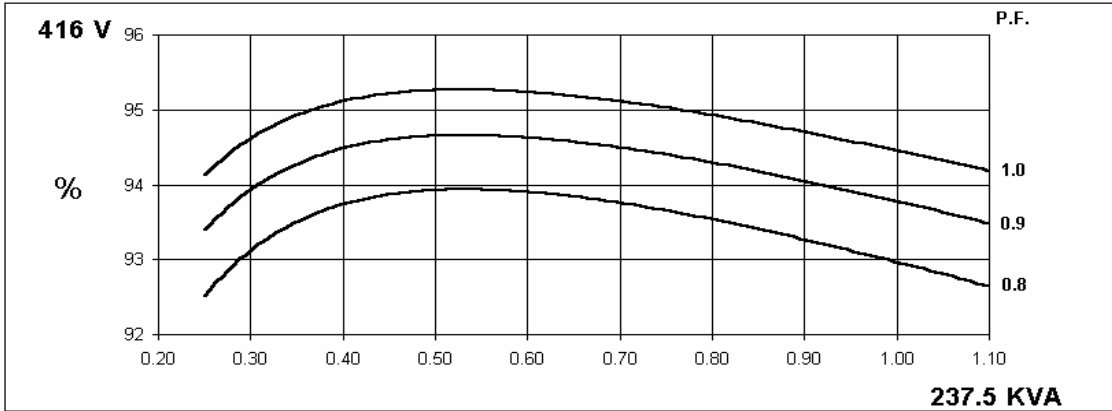

QYI274H


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

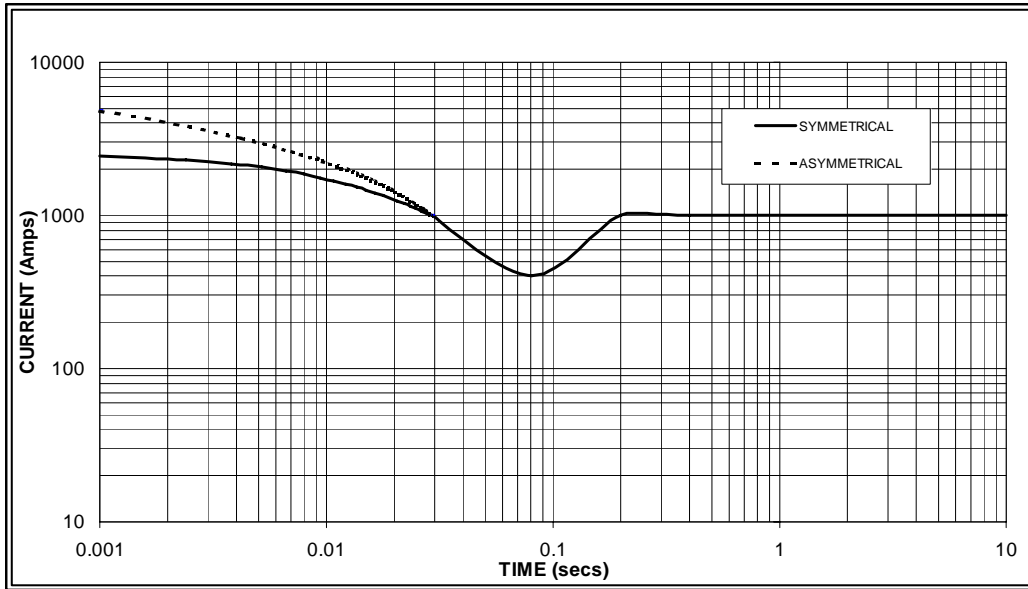

Sustained Short Circuit = 1,000 Amps

60
Hz

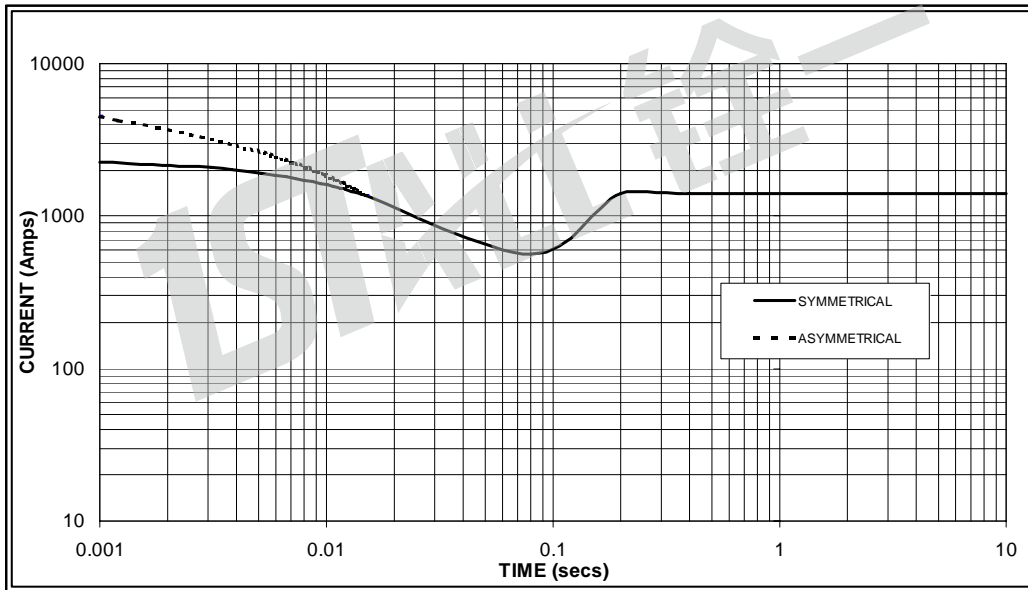

Sustained Short Circuit = 1,400 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.07	440v	X 1.06
415v	X 1.12	460v	X 1.12
		480v	X 1.17

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

