

QYI404C





THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY12 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature 环境温度	40 °C		Method of Cooling 冷却方式			Air cooling 风冷								
Temperature Rise 温升	125 °C		Direction of Rotation 旋转方向			Clockwise 顺时针								
Insulation Class 绝缘等级	H		Maximum Over-speed 最高转速			2250r/min								
Power Factor 功率因数	0.8		Degree of Protection / Enclosure 防护等级			IP23								
Excitation 励磁方式	Brushless 无刷		Altitude 海拔			1000m								
Winding Pitch 绕组节距	2/3		Stator winding 定子绕组			双层叠绕绕组 DLL								
Pole 极数	4		Number of Terminal 终端数量			6								
Duty 工作制	S1- Continuous		Rotor 转子			With damping cage 带阻尼								
Waveform 电话干扰因数	TIF<50			THF<2%										
Waveform distortion 波形畸变率	BS EN 61000-6-2&BS EN 61000-6-4, VDE 0875G, VDE0874N													
Radio interference 无线电干扰	Noload<1.5%, Non-distorting balanced linear load<5%													
AVR MODEL AVR型号	Standard 标配		Selection 选配			PMG								
	MX341B		MX321		MX341B		MX321							
Voltage Regulation - in steady state condition 电压调节	±0.5		±0.5		±0.5		±0.5							
Short Circuit Current Capacity 短路电流容量	3460A													
Electrical Characteristic														
Frequency 频率	Hz	50			60									
Voltage (series star) 电压 Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277					
Voltage (parallel star) 电压 YY	V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A					
Voltage (series delta) 电压 Δ	V	220	230	240	254	240	254	266	277					
Rated power at Class H (125 °C) temperature rise	kVA	760	800	800	725	865	916	958	1000					
额定功率在H(125 °C)温升	kW	608	640	640	580	692	732.8	766.4	800					
Efficiency at Class H (P.F.=0.8) 绝缘等级H (P.F.=0.8) 效率	4/4%	93.5	93.6	93.8	94.2	93.3	93.5	93.6	93.7					
	3/4%	94.3	94.4	94.5	94.7	94.1	94.2	94.2	94.2					
	2/4%	94.5	94.6	94.5	94.2	94.1	94.2	94.2	94.2					
Efficiency at Class H (P.F.=1.0) 绝缘等级H (P.F.=1.0) 效率	4/4%	94.9	95	95.1	95.5	94.7	94.9	95	95					
	3/4%	95.6	95.7	95.8	95.9	95.2	95.3	95.5	95.6					
	2/4%	95.8	95.8	95.8	95.5	95.3	95.3	95.5	95.5					
Reactances (%) at Class H 绝缘等级H 考核时的电抗														
Direct axis synchronous reactance unsaturated 直轴同步电抗	Xd	2.69	2.56	2.38	1.92	3.07	2.91	2.79	2.67					
Direct axis transient reactance saturated 直轴瞬态电抗	X'd	0.15	0.14	0.13	0.11	0.17	0.16	0.16	0.15					
Direct axis subtransient reactance saturated 直轴瞬变电抗	X" d	0.11	0.1	0.1	0.08	0.12	0.12	0.11	0.11					
Quadrature axis synchronous reactance unsaturated 交轴同步电抗	Xq	2.24	2.13	1.98	1.6	2.56	2.42	2.32	2.22					
Quadrature axis subtransient reactance saturated 交轴起始瞬态电抗	X" q	0.27	0.25	0.24	0.19	0.3	0.28	0.27	0.26					
Leakage reactance 漏抗	X1	0.08	0.08	0.07	0.06	0.09	0.09	0.08	0.08					
Negative sequence reactance saturated 负序电抗饱和	X2	0.19	0.18	0.17	0.13	0.22	0.21	0.2	0.19					
Zero sequence reactance unsaturated 零序电抗不饱和	X0	0.03	0.03	0.02	0.02	0.03	0.03	0.03	0.03					
Short-circuit ratio 短路比	Kcc	0.3717	0.3906	0.4202	0.5208	0.3257	0.3436	0.3584	0.3745					
Short-circuit transient time constant (sec.) 瞬变时间常数 (秒)	T'd	0.099												
Subtransient time constant (sec.) 超瞬变时间常数 (秒。)	T" d	0.013												
Open circuit time constant (sec.) 开路时间常数	T'do	2.95												
Armature time constant (sec.) 电枢时间常数	Ta	0.034												
Stator Winding Resistance (20°C) 定子绕组电阻(20°C)	ohm	0.0034												
Rotor Winding Resistance (20°C) 转子绕组电阻(20°C)	ohm	1.7												
Exciter Stator Resistance (20°C) 励磁机定子电阻(20°C)	ohm	17.5												
Exciter Rotor Phase resistance 励磁机转子相电阻	ohm	0.063												
No load excitation current 空载励磁电流	io (A)	0.6	0.63	0.71	0.65	0.56	0.6	0.62	0.63					
Full load excitation current 满载励磁电流	ic(A)	2.6	2.7	2.8	2.7	2.7	2.7	2.8	2.8					
Cooling air requirement 空气冷却要求	m³/sec	2.18m³/s			4619cfm				2.63m³/s 5573cfm					
Mechanical Characteristic														
Configuration 结构	Single Bearing 单轴承				Double Bearing 双轴承									
Type of Construction 结构形式	B2-SAE				IM B34									
Total Weight - kgs 总重量-公斤	1900				1880									
Weight wound stator - kgs 定子重量-公斤	900				900									
Weight wound rotor - kgs 转子重量-公斤	788				744									
Inertia (J) [kgm²] 转动惯量 (J) [kgm²]	17.652kgm²				17.1086kgm²									
Drive end bearing / Lubrication 驱动端轴承/润滑	BALL.6224-2RS(ISO)				BALL.6224-2RS(ISO)									
Non-drive end bearing / Lubrication 非驱动端轴承/润滑	BALL.6317-2RS(ISO)				BALL.6317-2RS(ISO)									
Packing crate size 包装尺寸 (cm)	178X97X133				186X97X133									

50
Hz

QYI404C
Winding 312





THREE PHASE EFFICIENCY CURVES

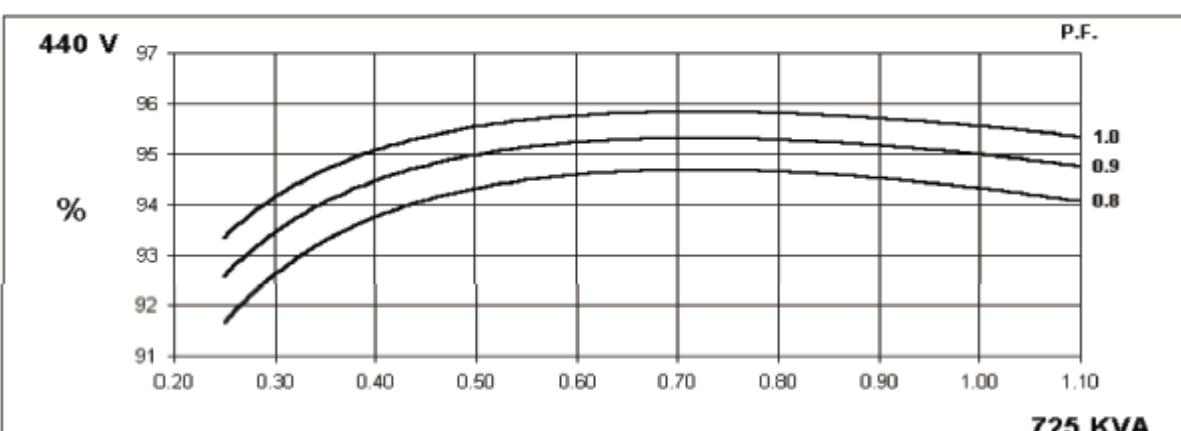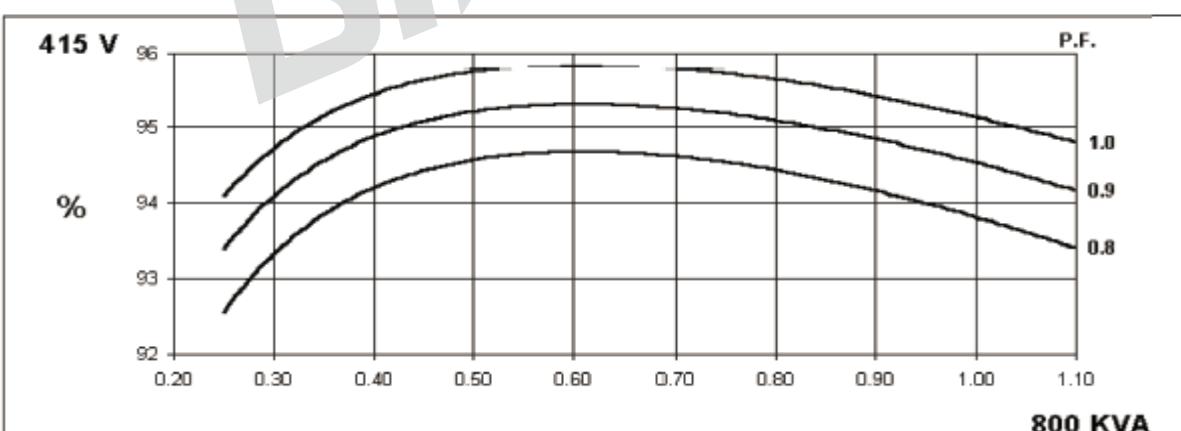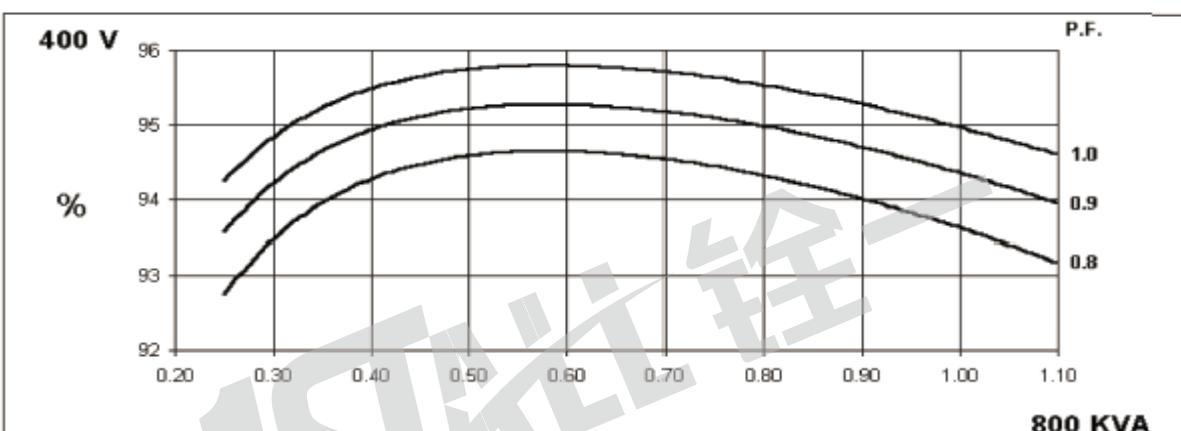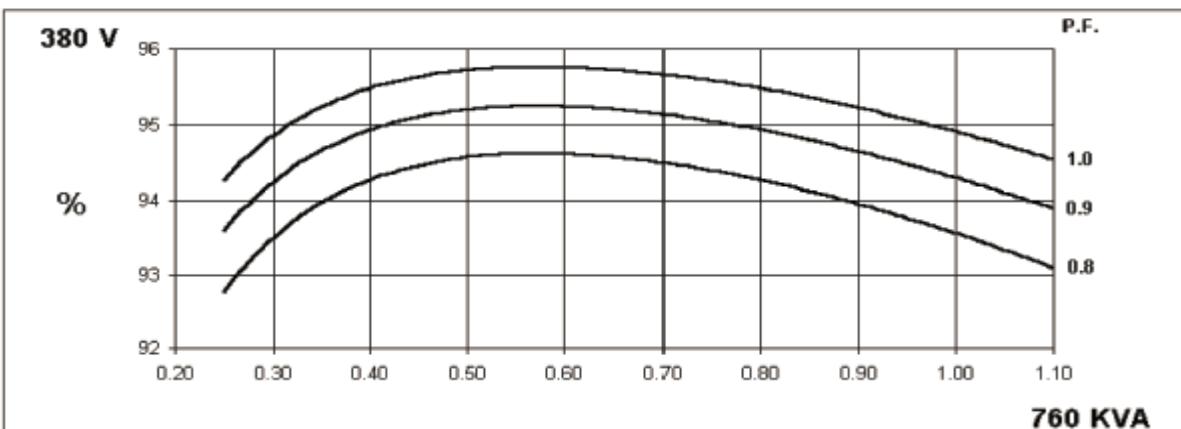

**60
Hz**

**QYI404C
Winding 312**


THREE PHASE EFFICIENCY CURVES

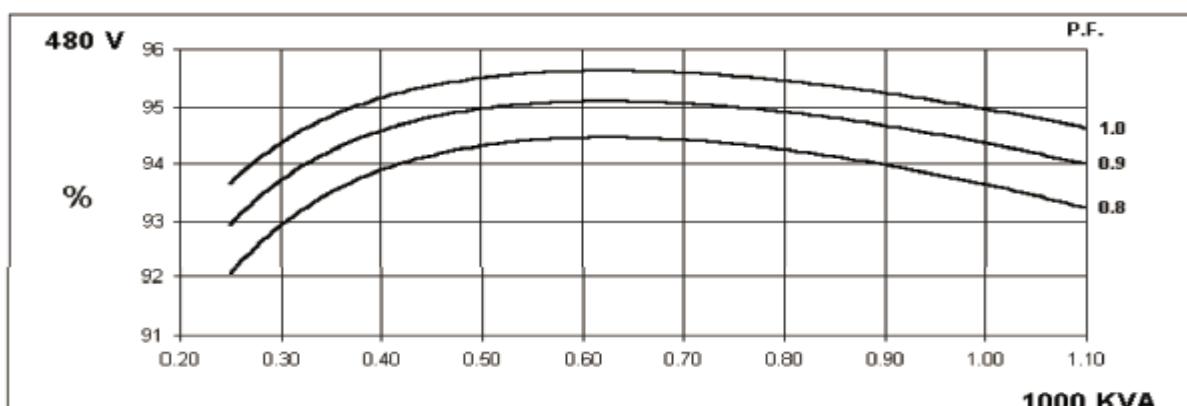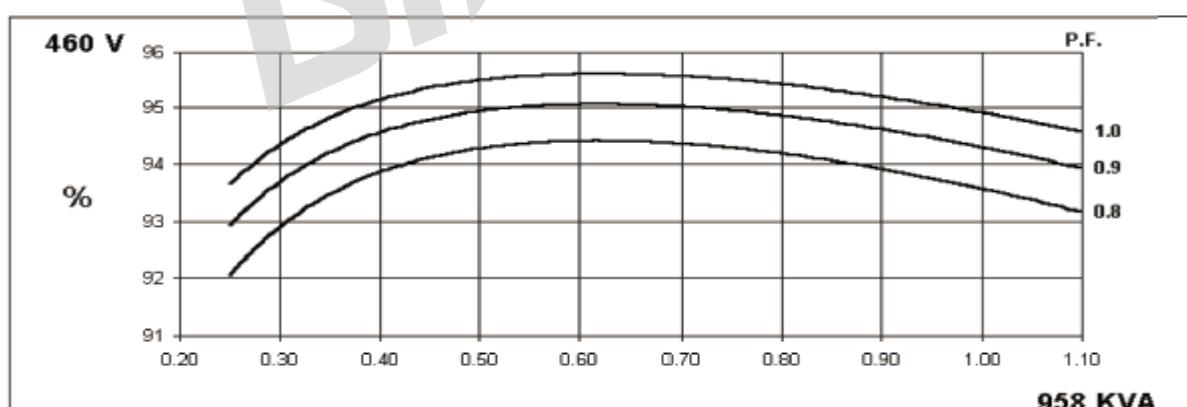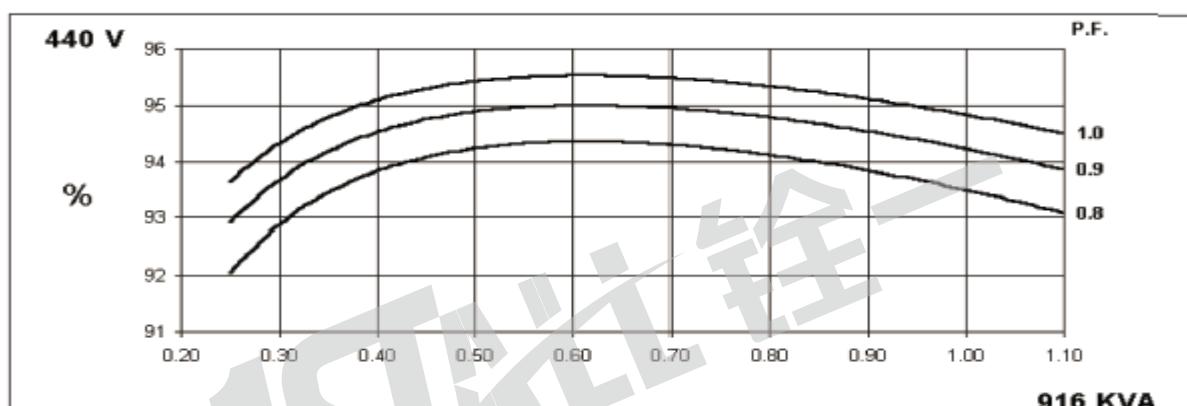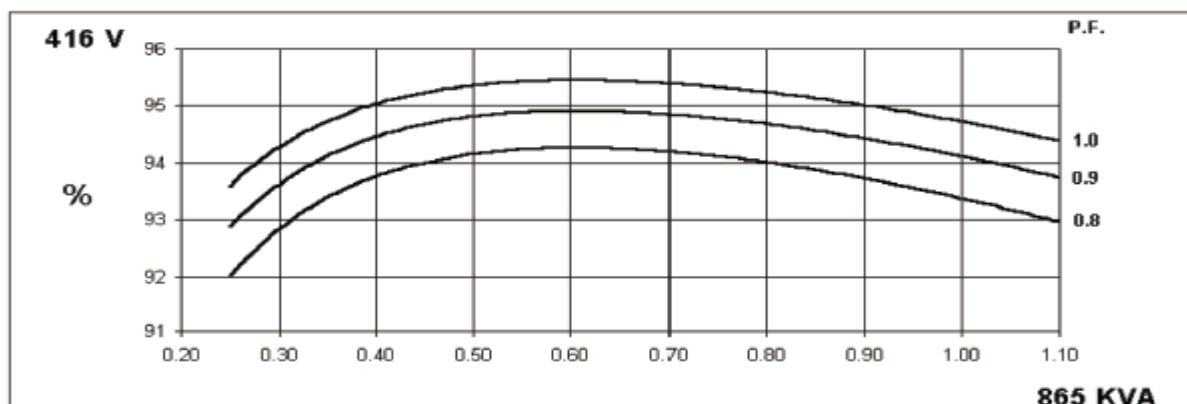

QYI404C


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

**50
Hz**

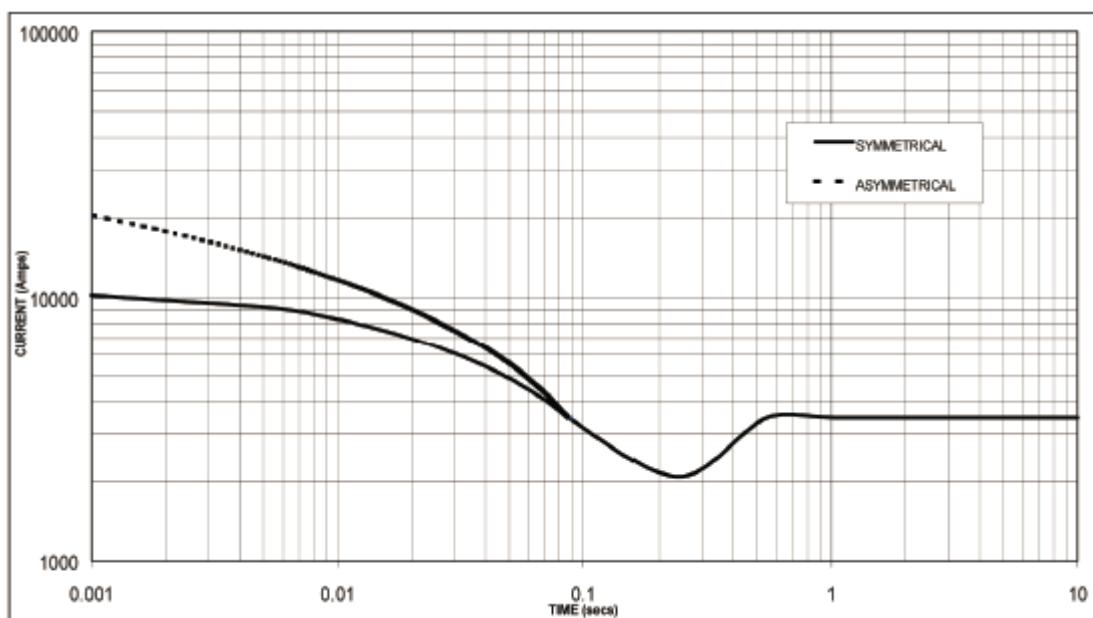

Sustained Short Circuit = 3460 Amps

**60
Hz**

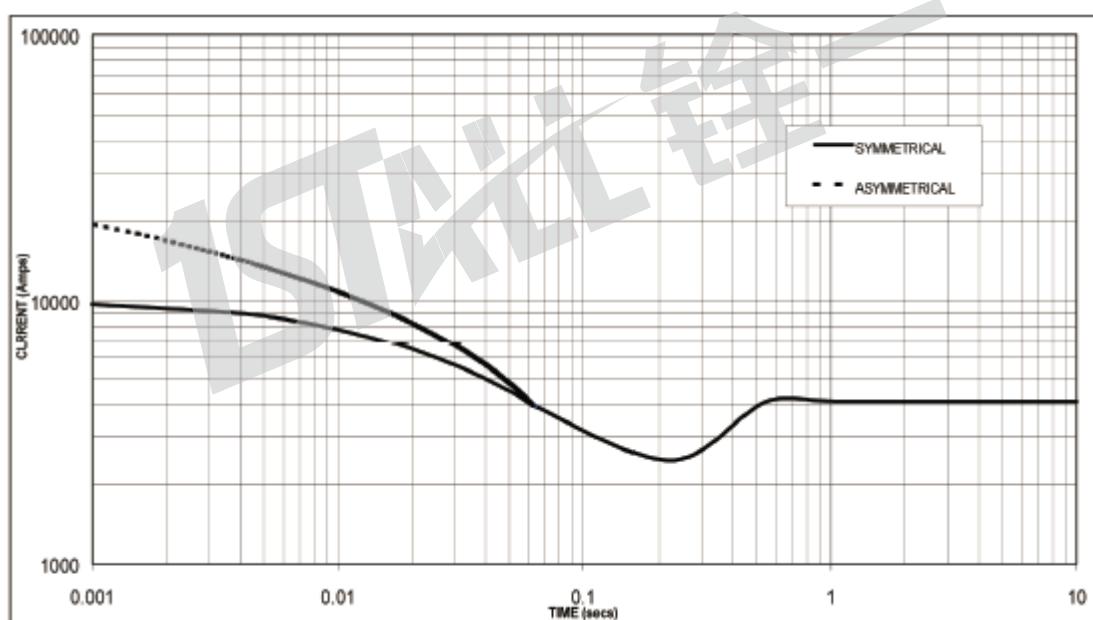

Sustained Short Circuit = 4090 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	x 1.00	416v	x 1.00
400v	x 1.05	440v	x 1.06
415v	x 1.09	460v	x 1.10
440v	x 1.16	480v	x 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines.


QYI404C
Winding 312 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	697	733	733	664	760	800	800	725	785	825	825	745	800	840	840	760
	kW	558	586	586	531	608	640	640	580	628	660	660	596	640	672	672	608
	Efficiency (%)	93.9	94.0	94.1	94.5	93.6	93.6	93.8	94.3	93.4	93.5	93.7	94.3	93.3	93.4	93.6	94.2
kW Input		594	624	623	562	650	684	682	615	672	706	704	632	686	719	718	645


60 Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	790	840	878	917	865	916	958	1000	897	948	992	1035	905	958	1000	1045
	kW	632	672	702	734	692	733	766	800	718	758	794	828	724	766	800	836
	Efficiency (%)	93.7	93.8	93.9	93.9	93.4	93.5	93.6	93.6	93.2	93.4	93.4	93.5	93.2	93.3	93.4	93.5
	kW Input	674	716	748	781	741	784	819	855	770	812	850	886	777	821	857	894

DIMENSIONS

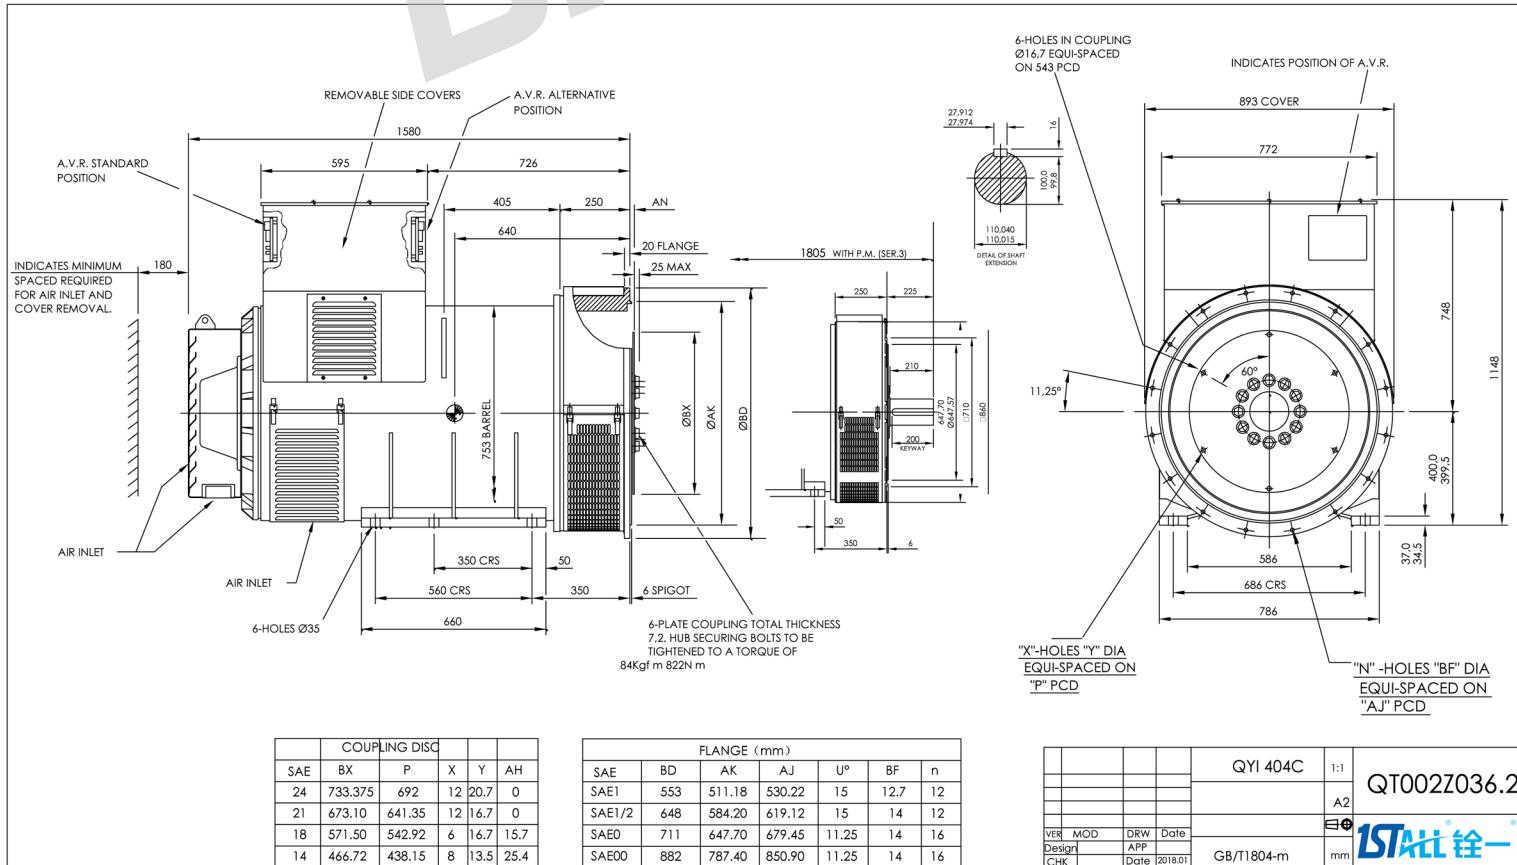

QYI404C
Winding 311

INERTIA

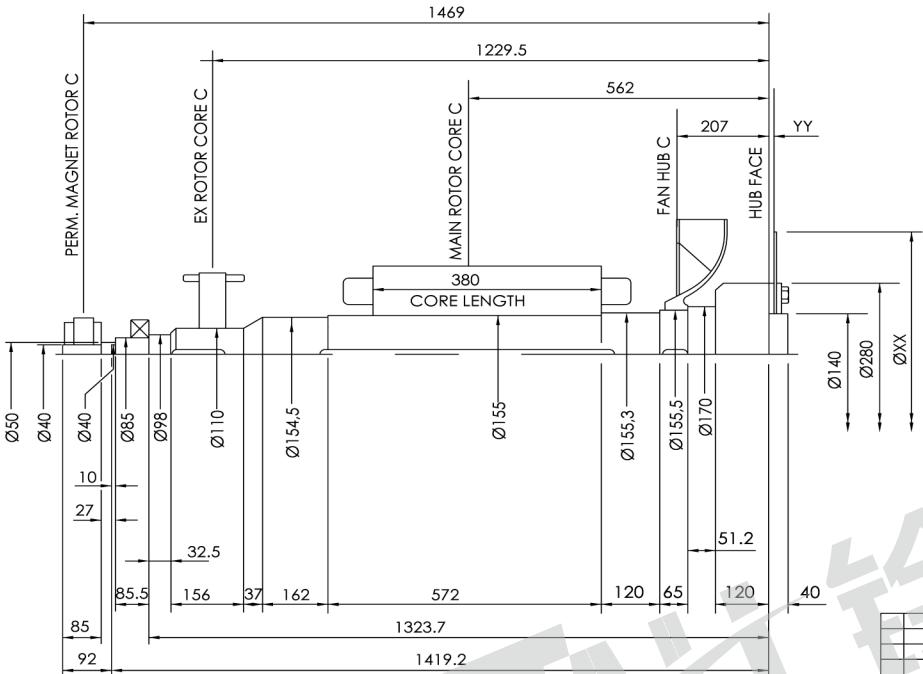

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	51.6	0,859
MAIN ROTOR	483.521	15.0638
FAN	16.1	0,6762
SHAFT	191.914	0,5514
HUB	37.098	0,4823
P.M.EX.ROTOR	6.97	0,019
P.M. STUB SHAFT	0.929	0,0003
TOTAL	788.132	17.652

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
14	467	25	25	0,265
16	518	16	24,3	0,403
18	572	16	24,4	0,535
21	673	0	24,25	1,053
24	733	0	28	1,602

QYI 404C			1:1	0QY201063
INERTIA				
VER	MOD	DRW	Date	
Design		APP		
CHK		Date	2018.01	mm

WWW.FIRSTALLPOWER.COM

1ST ALL 鑫一