

QY1164B

THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling	Air cooling	
Temperature Rise	125 °C	Direction of Rotation	Clockwise	
Insulation Class	H	Maximum Over-speed	2250r/min	
Power Factor	0.8	Degree of Protection / Enclosure	IP23	
Excitation	Brushless	Altitude	1000m	
Winding Pitch	2/3	Stator winding	DLL	
Pole	4	Number of Terminal	12	
Duty	S1- Continuous	Rotor	With damping cage	
Waveform	TIF<50		THF<2%	
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N			
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%			
AVR MODEL AVR	Standard	Selection		PMG
	SX460	AS440	KRS440	
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	
Short Circuit Current Capacity	Control does not sustain a short circuit current			

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	11	11	11	8.5	13	13.8	13.8	13.8
	kW	8.8	8.8	8.8	6.8	10.4	11.0	11.0	11.0
Efficiency at Class H (P.F.=0.8)	4/4%	78.8	79.3	80	80.2	79	79	79.7	80.1
	3/4%	81.8	82	82	82.4	81.7	82	82.1	82.5
	2/4%	83	83	83	82.9	82.9	83	83	83
Efficiency at Class H (P.F.=1.0)	4/4%	83	83.6	84	84.6	83	83	83.7	84.1
	3/4%	85.5	85.9	86	86.2	85.3	85.5	85.9	86.1
	2/4%	86.5	86.7	86.8	86.6	86.2	86.5	86.5	86.6

Reactances (%) at Class H

Direct axis synchronous reactance unsaturated	X _d	1.969	1.777	1.651	1.901	2.33	2.211	2.023	1.858
Direct axis transient reactance saturated	X' _d	0.201	0.181	0.168	0.194	0.237	0.225	0.206	0.189
Direct axis subtransient reactance saturated	X'' _d	0.125	0.113	0.105	0.12	0.148	0.14	0.128	0.118
Quadrature axis synchronous reactance unsaturated	X _q	0.978	0.883	0.82	0.945	1.158	1.098	1.005	0.923
Quadrature axis subtransient reactance saturated	X'' _q	0.225	0.203	0.189	0.217	0.266	0.252	0.231	0.212
Leakage reactance	X _l	0.079	0.071	0.066	0.076	0.093	0.088	0.081	0.074
Negative sequence reactance saturated	X ₂	0.188	0.17	0.158	0.181	0.223	0.212	0.194	0.178
Zero sequence reactance unsaturated	X ₀	0.085	0.077	0.072	0.083	0.102	0.096	0.088	0.081
Short-circuit ratio	K _{cc}	0.5079	0.5627	0.6057	0.5260	0.4292	0.4523	0.4943	0.5382

Short-circuit transient time constant (sec.)	T' _d	0.014							
Subtransient time constant (sec.)	T'' _d	0.0035							
Open circuit time constant (sec.)	T' _{do}	0.25							
Armature time constant (sec.)	T _a	0.0045							
Stator Winding Resistance (20°C)	ohm	1.012							
Rotor Winding Resistance (20°C)	ohm	0.48							
Exciter Stator Resistance (20°C)	ohm	19							
Exciter Rotor Phase resistance	ohm	0.13							
No load excitation current	i ₀ (A)	0.56	0.62	0.64	0.62	0.55	0.57	0.62	0.65
Full load excitation current	i _c (A)	1.95	1.9	1.95	1.9	1.88	1.9	1.92	1.92
Cooling air requirement	m ³ /sec	0.071m ³ /s 150cfm				0.09m ³ /s 191cfm			

Mechanical Characteristic

Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	93	100
Weight wound stator - kgs	26	26
Weight wound rotor - kgs	28	29
Inertia (J) [kgm ²]	0.1027kgm ²	0.1027kgm ³
Drive end bearing / Lubrication		BALL.6309-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6306-2RS(ISO)	BALL.6306-3RS(ISO)
Packing crate size (cm)	49X45X58	58X45X57

QYI164B


Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	10.0	10.0	10.0	7.7	11.0	11.0	11.0	8.5	N/A	N/A						
kW	8.0	8.0	8.0	6.2	8.8	8.8	8.8	6.8									
Efficiency (%)	79.9	80.5	80.8	81.3	78.7	79.4	79.8	80.4									
kW Input	10.0	9.9	9.9	9.8	11.2	11.1	11.0	10.9									

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	12.0	12.5	12.5	12.5	13.0	13.8	13.8	13.8	N/A	N/A						
kW	9.6	10.0	10.0	10.0	10.4	11.0	11.0	11.0									
Efficiency (%)	79.9	80.3	80.8	81.2	79.0	79.1	79.7	80.2									
kW Input	12.0	12.5	12.4	12.3	13.2	14.0	13.9	13.8									

DIMENSIONS

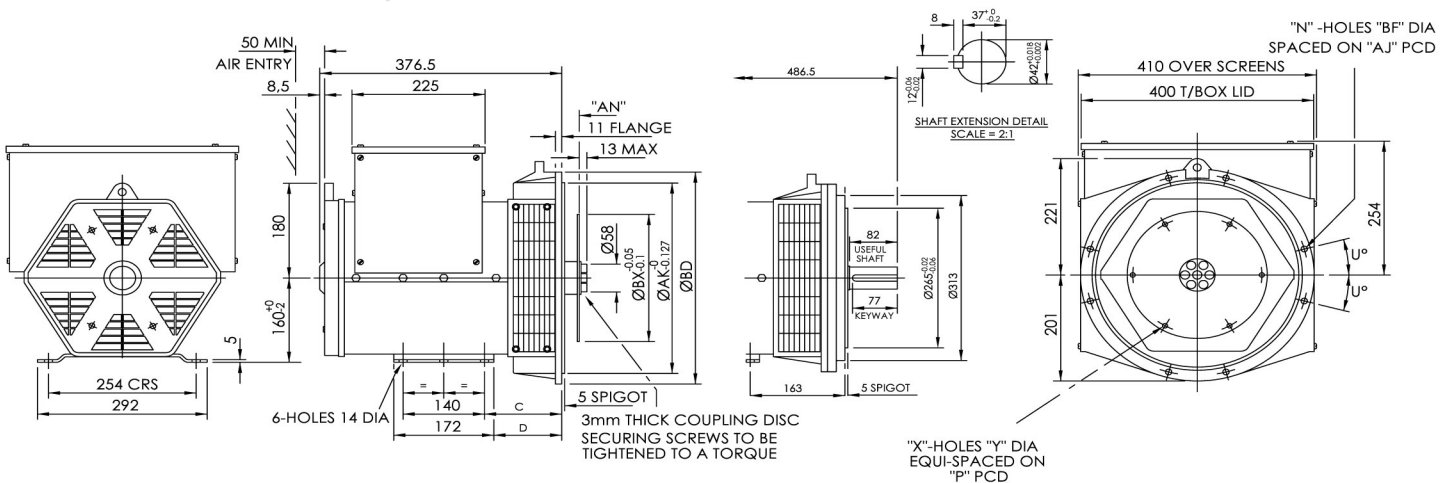

FLANGE(mm)								
	BD	AK	AJ	U°	BF	n	C	D
SAE5	356	314.32	333.38	22.5	11	8	133	117
SAE4	402	361.95	381	15	11	8	133	117
SAE3	451	409.58	428.62	15	11	8	145	129
SAE2	489	447.68	466.72	15	11	12	172	156





COUPLING DISC					
SAE	BX	P	X	Y	AN
11.5	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8
8	263.52	244.48	6	11	62
7.5	241.3	222.25	8	9	30.2
6.5	215.9	200.02	6	9	30.2

QYI 164				1:1	QT002Z030
				A2	
VER	MOD	DRW	Date		
Design	APP				
CHK	Date	2018.01	GB/T1804-m mm		

**50
Hz**

QY1164B
Winding 311





THREE PHASE EFFICIENCY CURVES

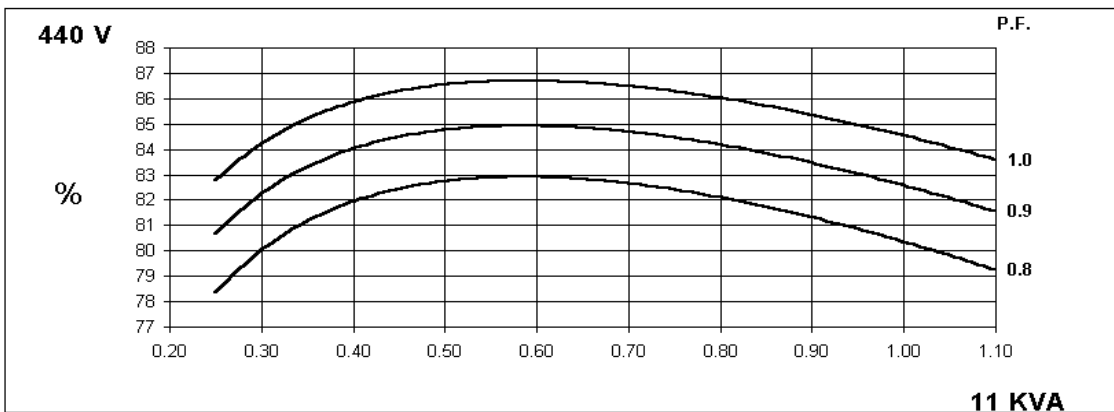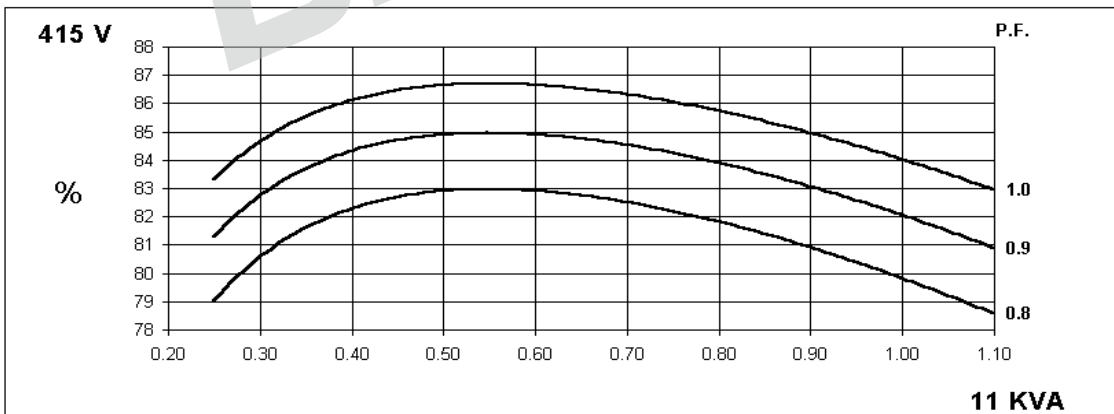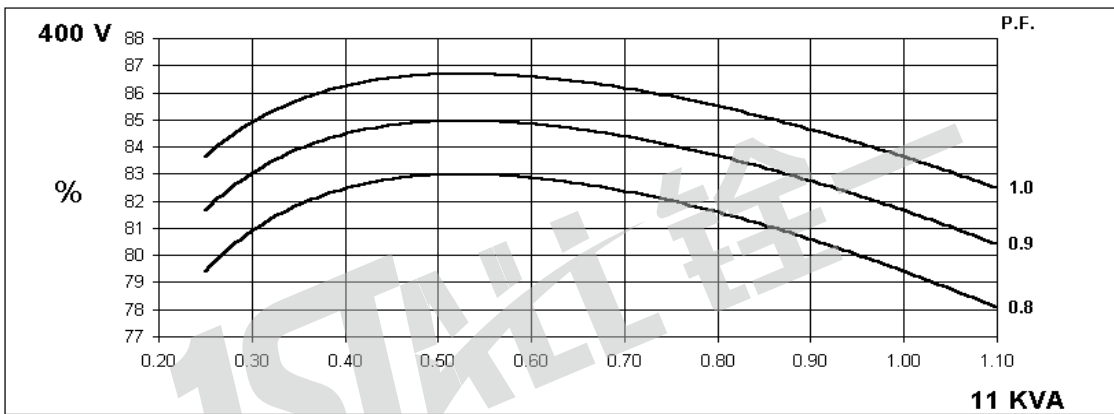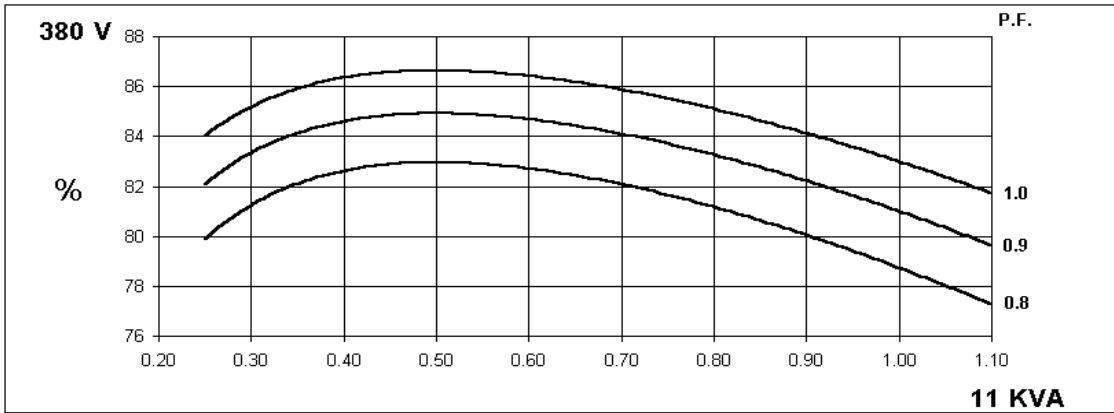

QY1164B
Winding 311

60
Hz


THREE PHASE EFFICIENCY CURVES

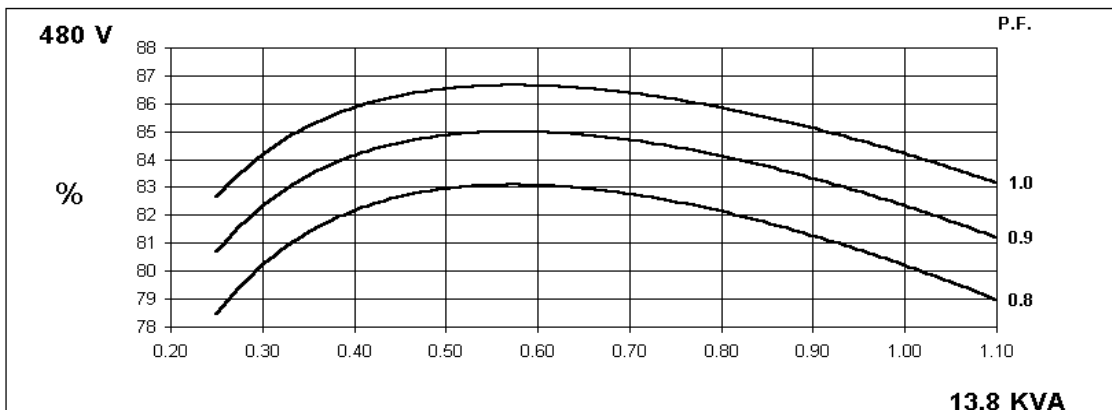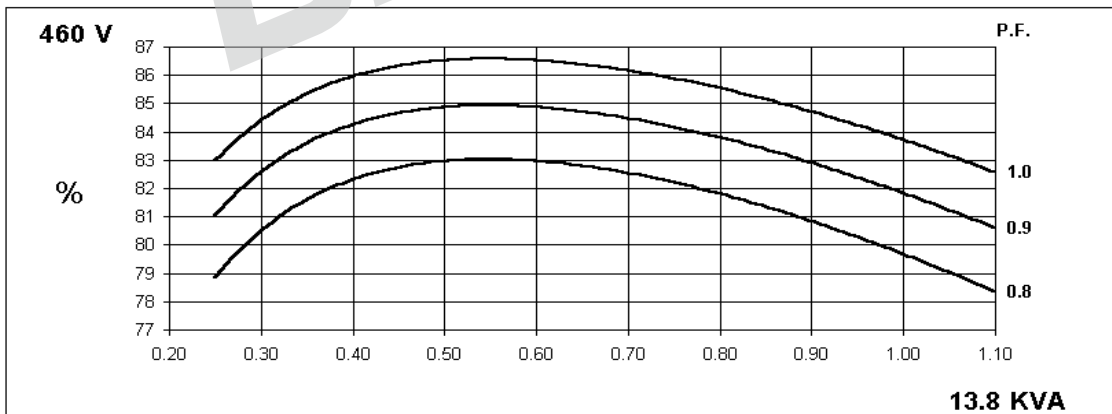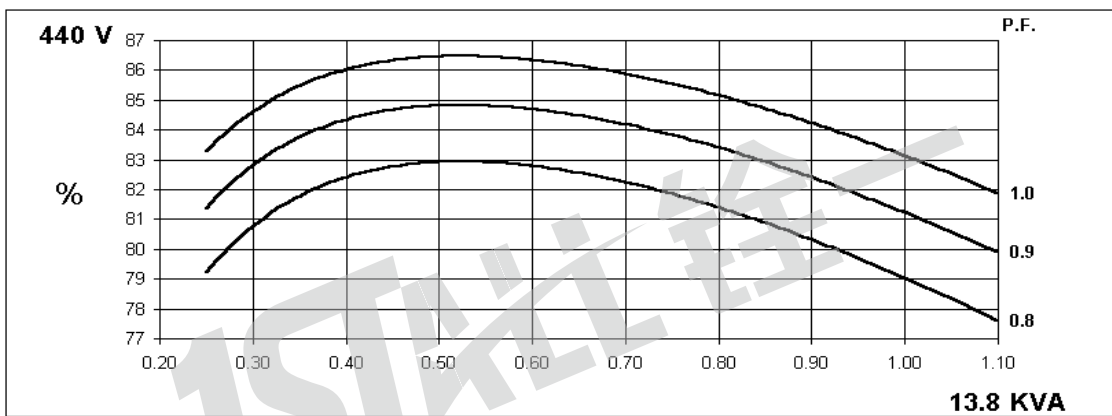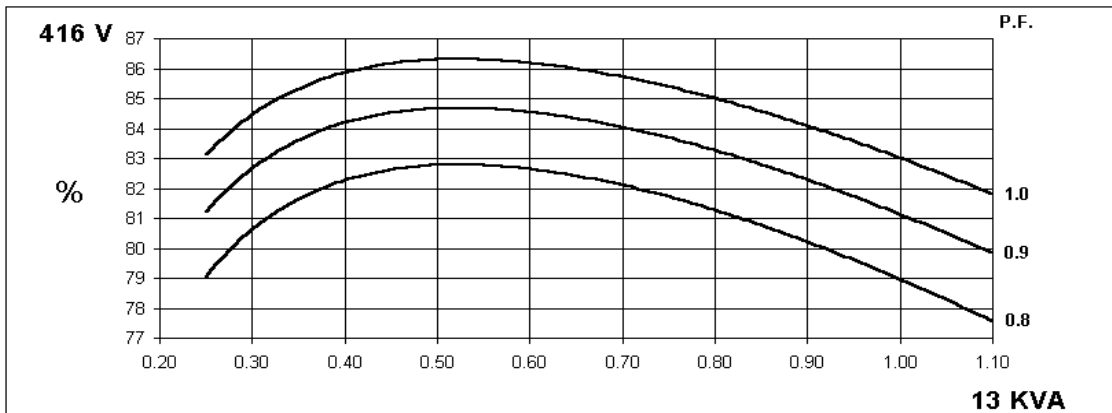

QYI164B

Winding 311

INERTIA

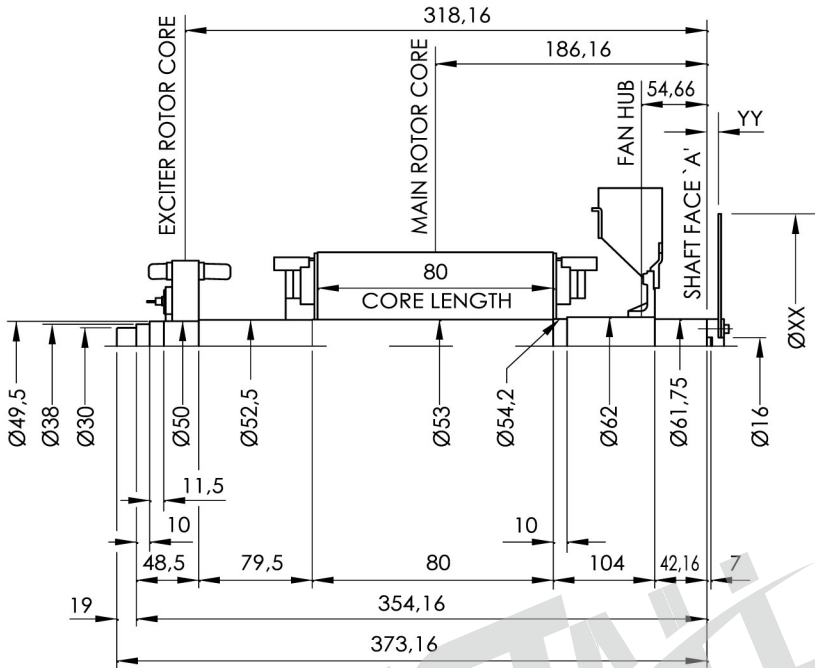


COMPONENT	Wt kg	J kgm ²
EX. ROTOR	4,300	0,0170
MAIN ROTOR	15,910	0,0768
FAN	0,744	0,0061
SHAFT	6,921	0,0028
TOTAL	27,875	0,1027

ADAPTOR SAE No.	COUPLING SAE No.	COUPLING DIMENSIONS		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
		XX	YY		
6	7½	241,2	31,7	1,810	0,0078
4/5	7½	241,2	0	1,071	0,0078
4/5	8	263	31,7	2,018	0,0111
4	10	314	23,8	2,377	0,0225
3	10	314	35,8	2,657	0,0225
3	1½	352	21,5	2,793	0,0356

				QYI 164B	1:1	OQY201003
				INERTIA		
VER	MOD	DRW	Date			
Design		APP				
CHK		Date	2018.01			

WWW.FIRSTALLPOWER.COM

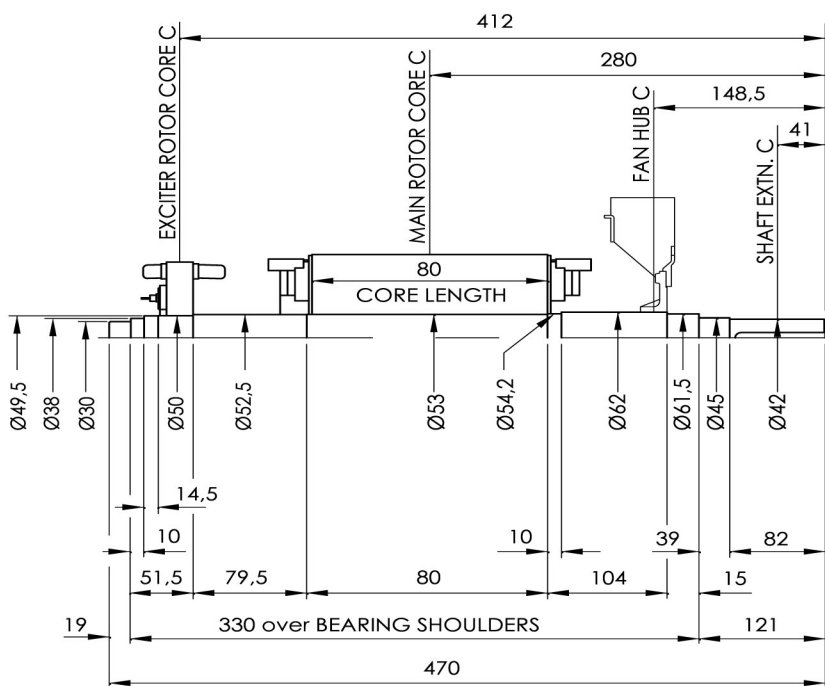

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	4,300	0,0170
MAIN ROTOR	15,910	0,0768
FAN	0,744	0,0061
SHAFT	7,704	0,0028
TOTAL	28,658	0,1027

				QYI 164B	1:1	OQY201004
				INERTIA		
VER	MOD	DRW	Date			
Design		APP				
CHK		Date	2018.01			

WWW.FIRSTALLPOWER.COM